

PIN HEADERS

[查询"DBCPHC2040AS1-XXX"供应商](#)

- Industry Compatible
- Competitively priced
- Various plated contacts available
- Various pin lengths available
- 2.54mm pitch

DUAL BODY DOUBLE ROW




SPECIFICATION


Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

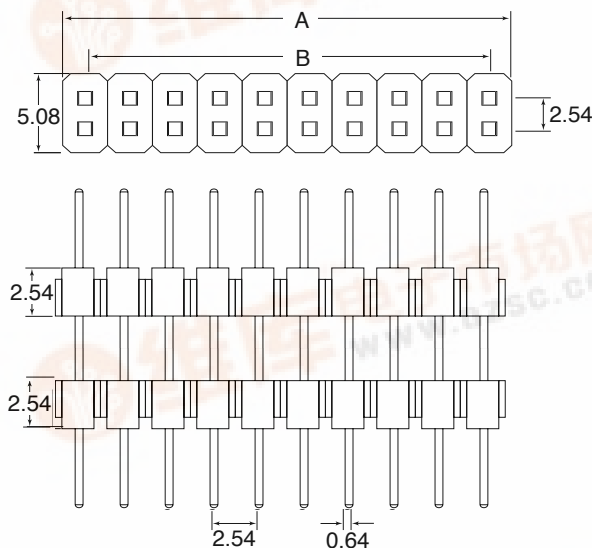

A = 2.54 x Position No
B = 2.54 x (Position N^o -1)



ORDERING INFORMATION

DBC	PH	C20	32	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	No. of Ways	Contact Material	Contact Plating	Colour	Unique Special Code
			02= 2x2 Ways Thro to 40= 40x2 Ways	A= Brass	G= Gold Flash T= Tin Plated S= Selective	1= Black	*See below

*Dubilier will allocate a special code to distinguish the pins lengths E,H,F and G



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn