



查询"74VHC245MSC"供应商

54VHC/74VHC244 • 54VHCT/74VHCT244

Octal Buffer/Line Driver with TRI-STATE® Outputs

General Description

The 'VHC/'VHCT244 is an advanced high speed CMOS octal bus buffer fabricated with silicon gate C²MOS technology. It achieves high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation. The 'VHC/'VHCT244 is a non-inverting TRI-STATE buffer having two active-low output enables. These devices are designed to be used as TRI-STATE memory address drivers, clock drivers, and bus oriented transmitter/receivers.

An input protection circuit ensures that 0V–7V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5V to 3V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.

Features


- High speed: $T_{PD} = 3.9 \text{ ns (Typ)} @ V_{CC} = 5V$
- Low power dissipation: $I_{CC} = 4 \mu\text{A (Max)} @ T_A = 25^\circ\text{C}$
- High noise immunity: $V_{NIH} = V_{NIL} = 28\% V_{CC} \text{ (Min)}$
- All inputs are equipped with a power down protection function
- Balanced propagation delays: $t_{PLH} \approx t_{PHL}$
- Wide operating voltage range: $V_{CC} \text{ (Opr)} = 2V \sim 5.5V$
- Low noise: $V_{OLP} = 0.8V \text{ (Max)}$
- Pin and function compatible with 74HC/HCT244

NOTE: VHCT SPECIFICATIONS ARE PRELIMINARY

MILITARY SPECIFICATIONS ARE PRELIMINARY


Ordering Code: See Section 5

Logic Symbol

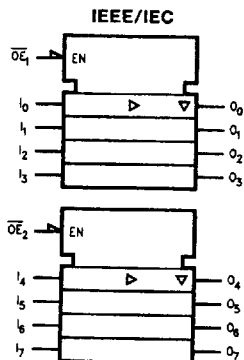


TL/F/11522-3

Connection Diagrams



TL/F/11522-1



TL/F/11522-2

Truth Tables

Pin Names	Description
$\overline{OE}_1, \overline{OE}_2$	TRI-STATE Output Enable Inputs
I_0-I_7	Inputs
O_0-O_7	TRI-STATE Outputs

Inputs		Outputs (Pins 12, 14, 16, 18)
$\overline{OE}_1$	I_n	
L	L	L
L	H	H
H	X	Z

Inputs		Outputs (Pins 3, 5, 7, 9)
$\overline{OE}_2$	I_n	
L	L	L
L	H	H
H	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level

I = Immaterial
Z = High Impedance

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	-0.5V to +7.0V
DC Input Voltage (V_{IN})	-0.5V to +7.0V
DC Output Voltage (V_{OUT})	
VHC	-0.5V to $V_{CC} + 0.5V$
VHCT*	-0.5V to 7.0V
Input Diode Current (I_{IK})	-20 mA
Output Diode Current (I_{OK})	
VHC	± 20 mA
VHCT	-20 mA
DC Output Current (I_{OUT})	± 25 mA
DC V_{CC} /GND Current (I_{CC})	± 75 mA
Storage Temperature (T_{STG})	-65°C to +150°C
Lead Temperature (T_L)	
(Soldering, 10 seconds)	300°C

* $V_{OUT} > V_{CC}$ only if output is in H or Z state.

Note 1: Absolute Maximum Ratings are values beyond which the device may be damaged or have its useful life impaired. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. National does not recommend operation outside databook specifications.

Recommended Operating Conditions

Supply Voltage (V_{CC})	
VHC	2.0V to 5.5V
VHCT	4.5V to 5.5V
Input Voltage (V_{IN})	0V to +5.5V
Output Voltage (V_{OUT})	0V to V_{CC}
Operating Temperature (T_{OPR})	
74VHC/VHCT	-40°C to +85°C
54VHC/VHCT	-55°C to +125°C
Input Rise and Fall Time (t_r, t_f)	
$V_{CC} = 3.3V \pm 0.3V$ (VHC Only)	0 ns/V ~ 100 ns/V
$V_{CC} = 5.0V \pm 0.5V$	0 ns/V ~ 20 ns/V

DC Characteristics for 'VHC Family Devices

Symbol	Parameter	V _{CC} (V)	74VHC			54VHC		74VHC		Units	Conditions	
			T _A = 25°C			T _A = -55°C to +125°C		T _A = -40°C to +85°C				
			Min	Typ	Max	Min	Max	Min	Max			
V _{IH}	High Level Input Voltage	2.0 3.0–5.5	1.5 0.7 V _{CC}			1.5 0.7 V _{CC}		1.5 0.7 V _{CC}		V		
V _{IL}	Low Level Input Voltage	2.0 3.0–5.5	0.5 0.3 V _{CC}			0.5 0.3 V _{CC}		0.5 0.3 V _{CC}		V		
V _{OH}	High Level Output Voltage	2.0	1.9	2.0		1.9		1.9		V	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -50 μA
		3.0	2.9	3.0		2.9		2.9				
		4.5	4.4	4.5		4.4		4.4		V		I _{OH} = -4 mA I _{OH} = -8 mA
		3.0	2.58			2.40		2.48				
		4.5	3.94			3.70		3.80				
V _{OL}	Low Level Output Voltage	2.0		0.0	0.1		0.1		0.1	V	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 50 μA
		3.0		0.0	0.1		0.1		0.1			
		4.5		0.0	0.1		0.1		0.1	V		I _{OL} = 4 mA I _{OL} = 8 mA
		3.0			0.36		0.50		0.44			
		4.5			0.36		0.50		0.44			

DC Characteristics for 'VHC Family Devices (Continued)

Symbol	Parameter	V _{CC} (V)	74VHC			54VHC		74VHC		Units	Conditions
			T _A = 25°C			T _A = -55°C to +125°C		T _A = -40°C to +85°C			
			Min	Typ	Max	Min	Max	Min	Max		
I _{OZ}	TRI-STATE Output Off-State Current	5.5			±0.25		±10.0		±2.5	μA	V _{IN} = V _{IH} or V _{IL} V _{OUT} = V _{CC} or GND
I _{IN}	Input Leakage Current	0-5.5			±0.1				±1.0	μA	V _{IN} = 5.5V or GND
I _{CC}	Quiescent Supply Current	5.5			4.0				40.0	μA	V _{IN} = V _{CC} or GND

DC Characteristics for 'VHC Family Devices: See Section 2 for Waveforms

Symbol	Parameter	V _{CC} (V)	74VHC		54VHC	74VHC	Units	Conditions	Fig. No.
			T _A = 25°C		T _A = -55°C to +125°C	T _A = -40°C to +85°C			
			Typ	Limits	Limits	Limits			
V _{OLP} **	Quiet Output Maximum Dynamic V _{OL}	5.0	0.5	0.8			V	C _L = 50 pF	2-11, 12
V _{OLV} **	Quiet Output Minimum Dynamic V _{OL}	5.0	-0.5	-0.8			V	C _L = 50 pF	2-11, 12
V _{IHD} **	Minimum High Level Dynamic Input Voltage	5.0		3.5			V	C _L = 50 pF	2-11, 12
V _{ILD} **	Maximum High Level Dynamic Input Voltage	5.0		1.5			V	C _L = 50 pF	2-11, 12

**Parameter guaranteed by design.

DC Characteristics for 'VHCT Family Devices

Symbol	Parameter	V _{CC} (V)	74VHC T _A = 25°C			54VHC T _A = -55°C to +125°C		74VHC T _A = -40°C to +85°C		Units	Conditions	
			Min	Typ	Max	Min	Max	Min	Max			
V _{IH}	High Level Input Voltage	4.5 5.5	2.0					2.0		V		
V _{IL}	Low Level Input Voltage	4.5 5.5			0.8 0.8				0.8 0.8	V		
V _{OH}	High Level Output Voltage	4.5	3.15	3.65				3.15		V	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -50 μA
		4.5	2.5					2.4				I _{OH} = -8 mA
V _{OL}	Low Level Output Voltage	4.5		0.0	0.1				0.1	V	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 50 μA
		4.5			0.36				0.44			I _{OL} = 8 mA
I _{OZ}	TRI-STATE Output Off-State Current	5.5			±0.25				±2.5	μA	V _{IN} = V _{IH} or V _{IL} V _{OUT} = V _{CC} or GND	
I _{IN}	Input Leakage Current	0-5.5			±0.1				±1.0	μA	V _{IN} = 5.5V or GND	
I _{CC}	Quiescent Supply Current	5.5			4.0				40.0	μA	V _{IN} = V _{CC} or GND	
I _{CC} T	Maximum I _{CC} /Input	5.5			1.35				1.50	mA	V _{IN} = 3.4V, Other Inputs = V _{CC} or GND	
I _{OPD}	Output Leakage (Power Down State)	0.0			+0.5				+5.0	μA	V _{OUT} = 5.5V	

DC Characteristics for 'VHCT Family Devices: See Section 2 for Waveforms

Symbol	Parameter	V _{CC} (V)	74VHCT		54VHCT	74VHCT	Units	Conditions	Fig. No.
			T _A = 25°C		T _A = -55°C to +125°C	T _A = -40°C to +85°C			
			Typ	Limits	Limits	Limits			
V _{OLP} **	Quiet Output Maximum Dynamic V _{OL}						V	C _L = 50 pF	2-11, 12
V _{OLV} **	Quiet Output Minimum Dynamic V _{OL}						V	C _L = 50 pF	2-11, 12
V _{IHD} **	Minimum High Level Dynamic Input Voltage						V	C _L = 50 pF	2-11, 12
V _{ILD} **	Maximum High Level Dynamic Input Voltage						V	C _L = 50 pF	2-11, 12

**Parameter guaranteed by design.



AC Electrical Characteristics for 'VHCT Family Devices: See Section 2 for Waveforms

[查询"74VHC245MSC"供应商](#)

Symbol	Parameter	V _{CC} (V)	74VHCT T _A = 25°C			54VHCT T _A = -55°C to +125°C		74VHCT T _A = -40°C to +85°C		Units	Conditions		Fig. No.
			Min	Typ	Max	Min	Max	Min	Max				
t _{PLH} , t _{PHL}	Propagation Delay Time	5.0 ± 0.5							ns		C _L = 15 pF C _L = 50 pF	2-5	
t _{PZL} , t _{PZH}	TRI-STATE Output Enable Time	5.0 ± 0.5							ns	R _L = 1 kΩ C _L = 50 pF	C _L = 15 pF C _L = 50 pF	2-7, 8	
t _{PLZ} , t _{PHZ}	TRI-STATE Output Disable Time	5.0 ± 0.5							ns	R _L = 1 kΩ	C _L = 50 pF	2-7, 8	
t _{OSLH} , t _{OSHL}	Output to Output Skew	5.0 ± 0.5							ns	(Note 1)	C _L = 50 pF		
C _{IN}	Input Capacitance								pF	V _{CC} = Open			
C _{OUT}	Output Capacitance								pF	V _{CC} = 5.0V			
C _{PD}	Power Dissipation Capacitance								pF	(Note 2)			

Note 1: Parameter guaranteed by design. t_{OSLH} = |t_{PLHmax} - t_{PLHmin}|; t_{OSHL} = |t_{PHLmax} - t_{PHLmin}|.

Note 2: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: I_{CC} (OPR.) = C_{PD} * V_{CC} * f_{IN} + I_{CC}/8 (per bit).