

# Ethernet DC/DC Regulated Converter EPC1104P & EPC1104H


[查询"EPC1104H"供应商](#)

- Features**
- 65 % Typical efficiency at full load
  - 1 mA max. input current in disable mode
  - Input / Output Isolation
  - Input filter to reduce input ripple current
  - Designed for low common mode noise


## Electrical Specifications

PCA P/N	Standard Package	Optional Packages	Input Voltage V	Output Voltage V	Output Current mA Max.	Output Ripple & Noise @ 20 MHz BW mV p-p	Isolation Vrms
EPC1104P	N2	N2-G	5 ±10%	-9 ± 5%	120	50 Max.	500
EPC1104H	N2	N2-G	5 ±10%	-9 ± 5%	120	50 Max.	2000

## PIN CONNECTIONS



### PACKAGE N2

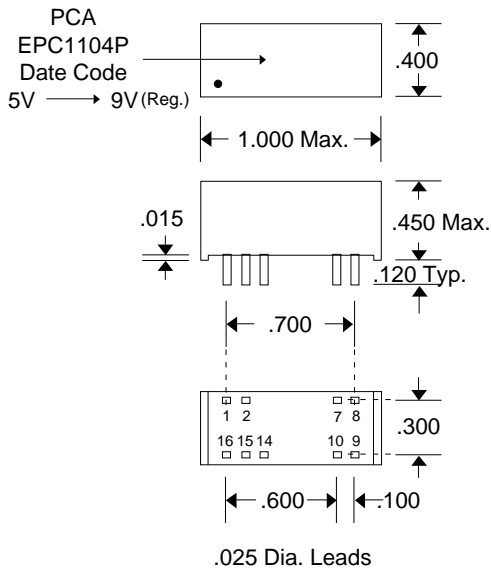

### PACKAGE N2-G

