



PROFESSIONAL PANEL SOCKET (443 RANGE)

Sheet No. **PS 0461**

Date : 01.09.94

Issue No. 3 (17.03.97)


PRODUCT SPECIFICATION

Sheet 1 of 1

Signature

Deltron Part No.	NICKEL	GOLD
BLACK	431-0100	432-0100
RED	431-0500	432-0500

Dimensions

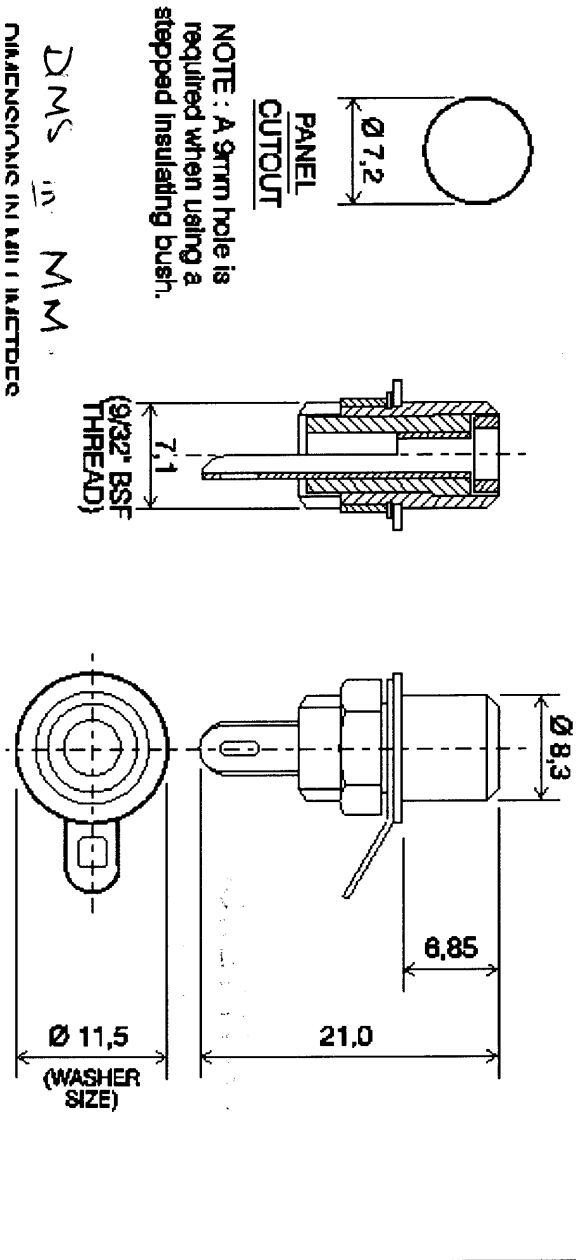

Description	Features
A turned brass single nut fixing panel socket available in nickel or gold plated finish. A choice of red or black insulator is useful for identification purposes. - single nut fixing makes these adaptable sockets suitable for stacking adjacent to one another. - thermoplastic insulated. - maximum panel thickness 3mm. - mounting hole 7.2mm diameter. - a panel isolating kit is also available (comprising of a plain and stepped washer).	MATERIAL HOUSING : Brass, gold flash (0.05mm) or nickel plate SOCKET : Brass, silver plate INSULATION : Acetal NUT : Brass, gold flash (0.05mm) or nickel plate SOLDER TAG : Brass, gold flash (0.05mm) or tin lead plate WASHER : Noryl, black or red RATINGS : 5 Amps at 200 Vdc / 150 Vac max INSULATION RESISTANCE : 100 M Ω at 500 Vdc

Request A Product Sample

This website is copyright Deltron Emcon 2001©
if you have any comments or suggestions please contact
sales@deltron-emcon.com

[查询"432-0100-1"供应商](#)