

GLASS PASSIVATED JUNCTION RECTIFIER


Forward Current – 3.0 Amperes

Features

- Cavity-free glass passivated junction
- High temperature metallurgically bonded construction
- High temperature soldering guaranteed:
350°C/10 seconds,0.375”(9.5mm) lead length,
5 lbs, (2.3kg) tension

Mechanical Data

- **Case:** Solid glass body.
- **Terminals:** Solder plated axial leads, solderable per MIL-STD-750.Method 2026.
- **Polarity:** Color band denotes cathode end.
- **Mounting Position:** Any
- **Weight:** 0.04 ounce, 1.1 grams.

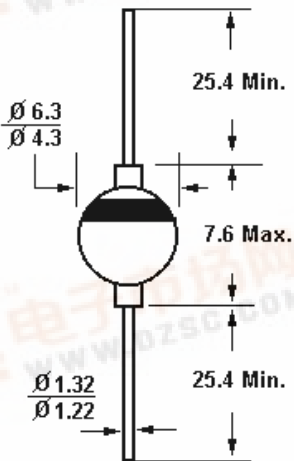


Dimensions in mm







Absolute Maximum Ratings and Characteristics
 Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	Value	Units
Maximum repetitive peak reverse voltage	V_{RRM}	400	Volts
Maximum RMS voltage	V_{RMS}	280	Volts
Maximum DC blocking voltage	V_{DC}	400	Volts
Maximum average forward rectified current 0.375” (9.5mm) lead length at $T_A=70^{\circ}C$	$I_{F(AV)}$	3	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	125	Amps
Maximum full load reverse current, full cycle average, 0.375”(9.5mm)lead length at $T_A=70^{\circ}C$	$I_{R(AV)}$	150	μA
Maximum instantaneous forward voltage at 3A $T_A = 25^{\circ}C$	V_F	1.3	Volts
Maximum DC reverse current at rated DC blocking voltage $T_A = 25^{\circ}C$ $T_A = 175^{\circ}C$	I_R	5	μA
		300	
Typical junction capacitance at 4V, 1MHz	C_J	40	pF
Typical thermal resistance (Note 1)	$R_{\theta JA}$	20	$^{\circ}C/W$
	$R_{\theta JL}$	10	
Operating junction temperature range	T_J	-65 to+175	$^{\circ}C$
Storage temperature range	T_S	-65 to+200	$^{\circ}C$

Notes: (1) Thermal resistance from junction to ambient and from junction to lead at 0.375”(9.5mm) lead length with both leads attached between heat sink.




Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

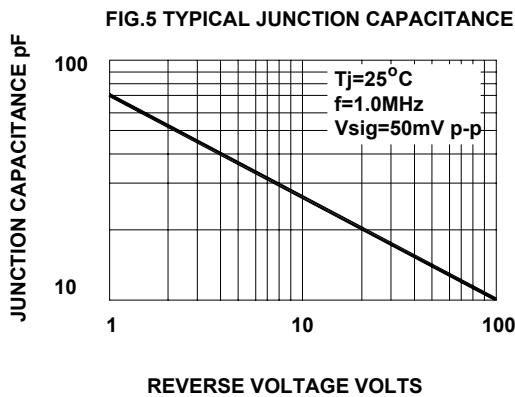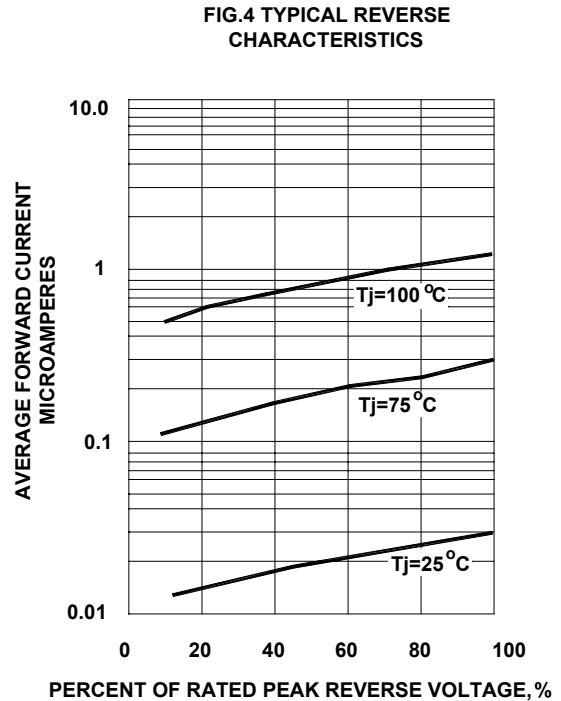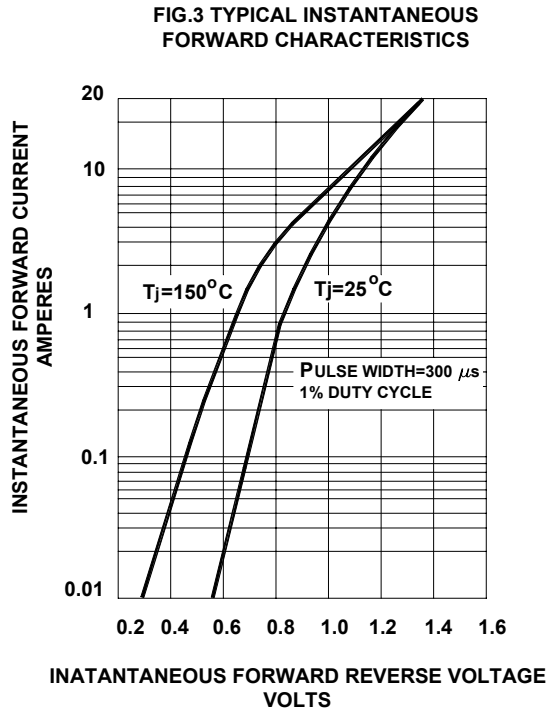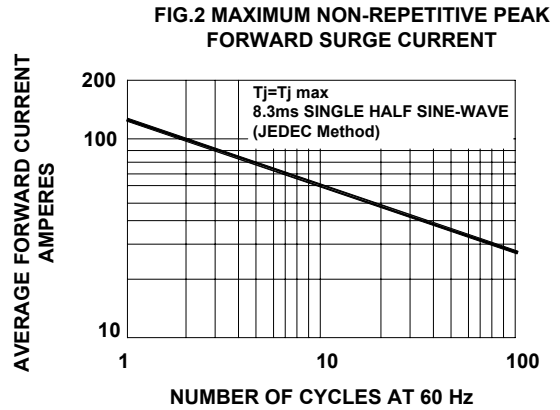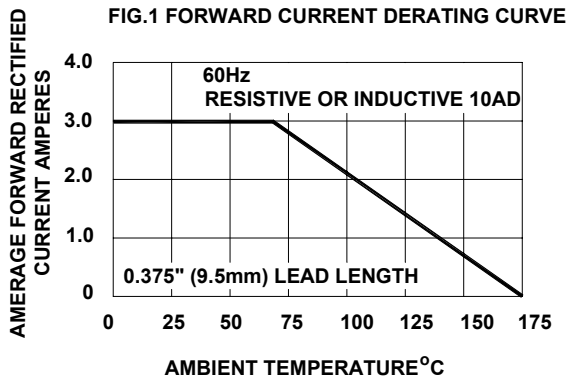

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 23/06/2003