



查询"2N7277D"供应商

2N7277D, 2N7277R 2N7277H

REGISTRATION PENDING

Currently Available as FRM234(D, R, H)

June 1993

Radiation Hardened
N-Channel Power MOSFETs

Features

- 7A, 250V, $R_{DS(on)} = 0.70\Omega$
- Second Generation Rad Hard MOSFET Results From New Design Concepts
- Gamma
 - Meets Pre-Rad Specifications to 100KRAD(Si)
 - Defined End Point Specs at 300KRAD(Si) and 1000KRAD(Si)
 - Performance Permits Limited Use to 3000KRAD(Si)
- Gamma Dot
 - Survives 3E9RAD(Si)/sec at 80% BVDSS Typically
 - Survives 2E12 Typically If Current Limited to IDM
- Photo Current
 - 4.0nA Per-RAD(Si)/sec Typically
- Neutron
 - Pre-RAD Specifications for 1E13 Neutrons/cm²
 - Usable to 1E14 Neutrons/cm²
- Single Event
 - Typically Survives 1E5ions/cm² Having an LET $\leq 35\text{MeV/mg/cm}^2$ and a Range $\geq 30\mu\text{m}$ at 80% BVDSS

Description

The Harris Semiconductor Sector has designed a series of SECOND GENERATION hardened power MOSFETs of both N and P channel enhancement types with ratings from 100V to 500V, 1A to 60A, and on resistance as low as 25m Ω . Total dose hardness is offered at 100K RAD(Si) and 1000KRAD(Si) with neutron hardness ranging from 1E13n/cm² for 500V product to 1E14n/cm² for 100V product. Dose rate hardness (GAMMA DOT) exists for rates to 1E9 without current limiting and 2E12 with current limiting. Heavy ion survival from signal event drain burn-out exists for linear energy transfer (LET) of 35 at 80% of rated voltage.

This MOSFET is an enhancement-mode silicon-gate power field effect transistor of the vertical DMOS (VDMOS) structure. It is specially designed and processed to exhibit minimal characteristic changes to total dose (GAMMA) and neutron (n^o) exposures. Design and processing efforts are also directed to enhance survival to heavy ion (SEE) and/or dose rate (GAMMA DOT) exposure.


This part may be supplied as a die or in various packages other than shown above. Reliability screening is available as either non TX (commercial), TX equivalent of MIL-S-19500, TXV equivalent of MIL-S-19500, or space equivalent of MIL-S-19500. Contact the Harris Semiconductor High-Reliability Marketing group for any desired deviations from the data sheet.

Package

TO-204AA



Symbol



Absolute Maximum Ratings (TC = +25°C) Unless Otherwise Specified

	2N7277D, R, H	UNITS
Drain-Source Voltage.....VDS	250	V
Drain-Gate Voltage (RGS = 20k Ω).....VDGR	250	V
Continuous Drain Current		
TC = +25°C.....ID	7	A
TC = +100°C.....ID	4	A
Pulsed Drain Current.....IDM	21	A
Gate-Source Voltage.....VGS	± 20	V
Maximum Power Dissipation		
TC = +25°C.....PT	75	W
TC = +100°C.....PT	30	W
Derated Above +25°C.....	0.60	W/°C
Inductive Current, Clamped, L = 100 μH , (See Test Figure).....ILM	21	A
Continuous Source Current (Body Diode).....IS	7	A
Pulsed Source Current (Body Diode).....ISM	21	A
Operating And Storage Temperature.....TJC, TSTG	-55 to +150	°C
Lead Temperature (During Soldering)		
Distance > 0.063 in. (1.6mm) From Case, 10s Max.....TL	300	°C

CAUTION: These devices are sensitive to electrostatic discharge. Users should follow proper I.C. Handling Procedures.
Copyright © Harris Corporation 1993

2N7277P 供应商

FIGURE 2. CLAMPED INDUCTIVE SWITCHING, ILM

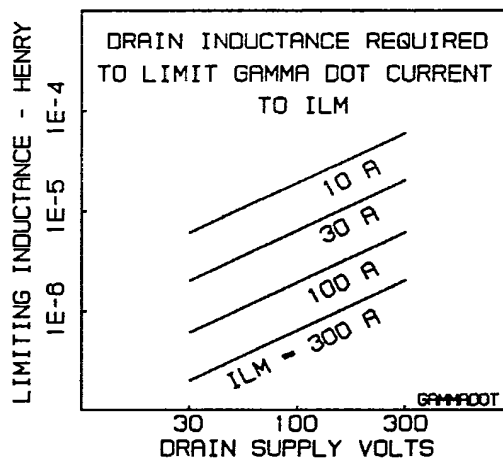
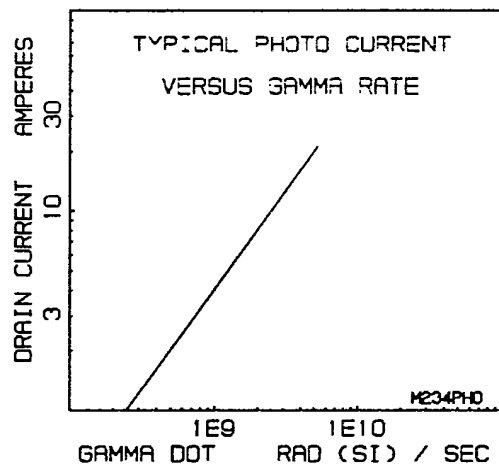
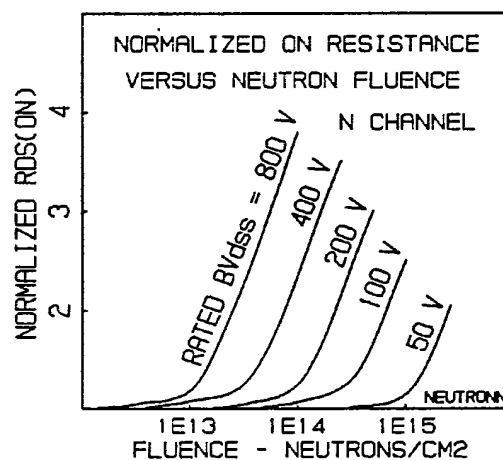
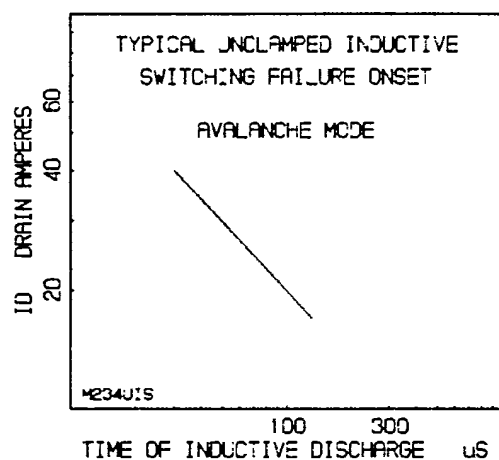
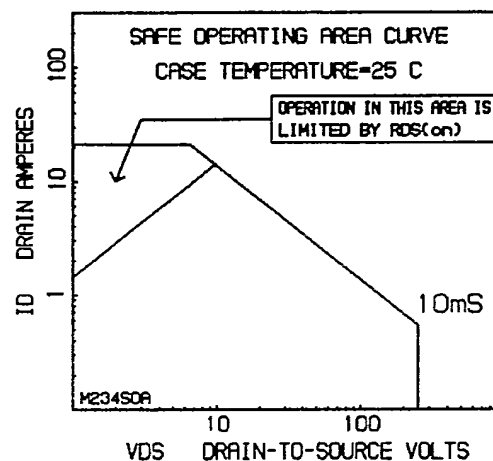
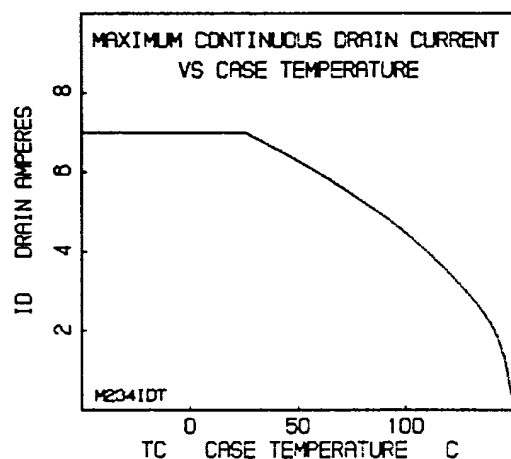
2N7277D, 2N7277R, 2N7277H - Registration Pending**Post-Radiation Electrical Specifications** TC = +25°C, Unless Otherwise Specified

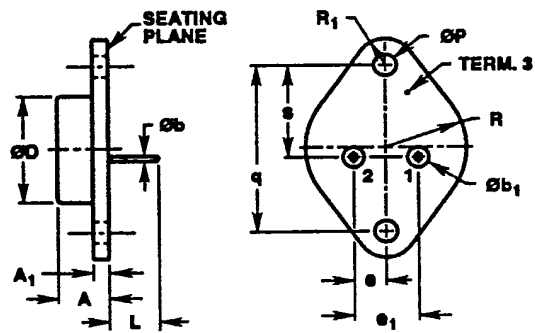
Post Radiation Electrical Specifications

PARAMETER	SYMBOL	TYPE	TEST CONDITIONS	LIMITS		UNITS	
				MIN	MAX		
Drain-Source Breakdown Volts	(Note 4, 6)	BVDSS	2N7277D, R	VGS = 0, ID = 1mA	250	-	V
	(Note 5, 6)	BVDSS	2N7277H	VGS = 0, ID = 1mA	238	-	V
Gate-Source Threshold Volts	(Note 4, 6)	VGS(th)	2N7277D, R	VGS = VDS, ID = 1mA	2.0	4.0	V
	(Note 3, 5, 6)	VGS(th)	2N7277H	VGS = VDS, ID = 1mA	1.5	4.5	V
Gate-Body Leakage Forward	(Note 4, 6)	IGSSF	2N7277D, R	VGS = 20V, VDS = 0	-	100	nA
	(Note 5, 6)	IGSSF	2N7277H	VGS = 20V, VDS = 0	-	200	nA
Gate-Body Leakage Reverse	(Note 2, 4, 6)	IGSSR	2N7277D, R	VGS = -20V, VDS = 0	-	100	nA
	(Note 2, 5, 6)	IGSSR	2N7277H	VGS = -20V, VDS = 0	-	200	nA
Zero-Gate Voltage Drain Current	(Note 4, 6)	IDSS	2N7277D, R	VGS = 0, VDS = 200V	-	25	μA
	(Note 5, 6)	IDSS	2N7277H	VGS = 0, VDS = 200V	-	100	μA
Drain-Source On-state Volts	(Note 1, 4, 6)	VDS(on)	2N7277D, R	VGS = 10V, ID = 7A	-	5.15	V
	(Note 1, 5, 6)	VDS(on)	2N7277H	VGS = 16V, ID = 7A	-	7.72	V
Drain-Source On Resistance	(Note 1, 4, 6)	RDS(on)	2N7277D, R	VGS = 10V, ID = 4A	-	0.700	Ω
	(Note 1, 5, 6)	RDS(on)	2N7277H	VGS = 14V, ID = 4A	-	1.05	Ω

NOTES:

1. Pulse test, 300μs max
2. Absolute value
3. Gamma = 300KRAD(Si)
4. Gamma = 10KRAD(Si) for "D", 100KRAD(Si) for "R". Neutron = 1E13
5. Gamma = 1000KRAD(Si). Neutron = 1E13
6. Insitu Gamma bias must be sampled for both VGS = +10V, VDS = 0V and VGS = 0V, VDS = 80% BVDSS
7. Gamma data taken 1/19/90 on TA17633 devices by GE ASTRO SPACE; EMC/SURVIVABILITY LABORATORY; KING OF PRUSSIA, PA 19401
8. Single event drain burnout testing by Titus, J.L., et al of NWSC, Crane, IN at Brookhaven Nat. Lab. Dec 11-14, 1989
9. Neutron derivation, HARRIS Application note AN-8831, Oct. 1988

2N7277D, 2N7277R, 2N7277H - Registration Pending**Typical Performance Characteristics**

2N7277D, 2N7277R, 2N7277H - Registration Pending[Packaging](#) 2N7277D"供应商**NOTES:**

1. These dimensions are within allowable dimensions of Rev. C of JEDEC TO-204AA outline dated 11-82.
2. Lead dimension (without solder).
3. Add typically 0.002 inches (0.05mm) for solder coating.
4. Position of lead to be measured 0.250 inches (6.35mm) from bottom of seating plane.
5. Controlling dimension: Inch.
6. Revision 1 dated 1-93.

TO-204AA**JEDEC TO-204AA HERMETIC STEEL PACKAGE**

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	0.310	0.330	7.88	8.38	-
A ₁	0.060	0.065	1.53	1.65	-
Øb	0.038	0.042	0.97	1.06	2, 3
Øb ₁	0.138	0.145	3.51	3.68	-
ØD	-	0.800	-	20.32	-
e	0.215 TYP		5.46 TYP		4
e ₁	0.430 BSC		10.92 BSC		4
L	0.440	0.460	11.18	11.68	-
ØP	0.155	0.160	3.94	4.06	-
q	1.187 BSC		30.15 BSC		-
R	0.495	0.525	12.58	13.33	-
R ₁	0.131	0.185	3.33	4.69	-
s	0.655	0.675	16.64	17.14	-