

QUADRATURE HYBRID MODEL SLQ-302

3:1 BANDWIDTH



20 - 60 MHz

SPECIFICATIONS (Rev. "B" 8/31/99)

Operating Frequency:	20 - 60 MHz	Phase Unbalance:	1.0° (Typ)/ 3.0° (Max)
Insertion Loss:	0.3 dB (Typ) / 0.5 dB (Max)	VSWR:	1.3:1 (Max)
Isolation:	23 dB (Typ)/20 dB (Min)	Power Rating	1 Watt (Max)
Amplitude Unbalance:	0.8 dB (Typ) / 1.0 dB (Max)	Impedance:	50 Ohms
		Operating Temp. Range:	-20° to +70°C





MECHANICAL OUTLINE:159

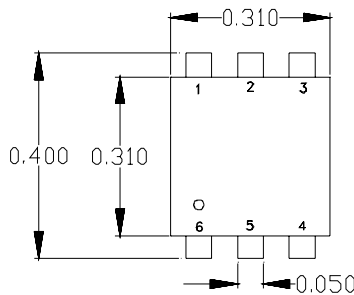

PIN-OUT	
INPUT	6
+90° OUTPUT	1
0° OUTPUT	2
ISOLATED*	5
External GND	3,4

* Terminate ISOLATED port with 50 ohms.

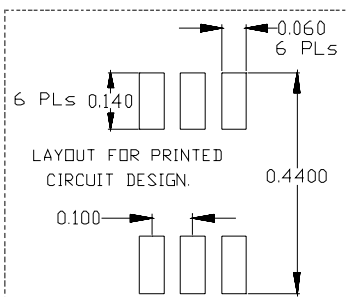

QUADRATURE HYBRID MODEL SLQ-302

3:1 BANDWIDTH

20 - 60 MHz

PERFORMANCE PLOTS

