

June 1989

54122/DM74122

Retriggerable Resettable Multivibrator

General Description


The '122 features positive and negative DC level triggering inputs, complementary outputs, an optional 10 kΩ internal timing resistor and an overriding Direct Clear (\overline{C}_D) input. When the circuit is in the quasi-stable (delay) state, another trigger applied to the inputs (per Truth Table) will cause the delay period to start again, without disturbing the outputs. This process can be repeated indefinitely and thus the output pulse period (Q HIGH, \overline{Q} LOW) can be made as long as desired. Alternatively, a delay period can be terminated

by a LOW signal applied to \overline{C}_D , which also prevents triggering. An internal connection from \overline{C}_D to the input gate makes it possible to trigger the circuit by a positive-going signal on \overline{C}_D , as shown in the Truth Table. For timing capacitor values greater than 1000 pF, the output pulse width is defined as follows:

$$t_w = 0.32 R_X C_X (1.0 + 0.7/R_X)$$

Where t_w is in ns, R_X is in kΩ and C_X is in pF.


Connection Diagram



TL/F/10212-1

Order Number 54122DMQB, 54122FMQB or DM74122N
See NS Package Number J14A, N14A or W14B

Logic Symbol

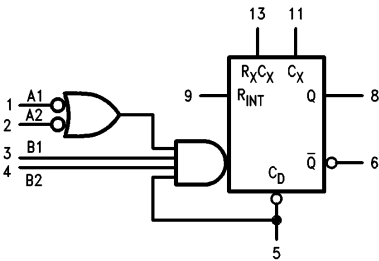

TL/F/10212-2

V_{CC} = Pin 14
GND = Pin 7
NC = Pins 10 and 12

Pin Names	Description
$\overline{A}_1, \overline{A}_2$	Trigger Inputs (Active Falling Edge)
B1, B2	Trigger Inputs (Active Rising Edge)
\overline{C}_D	Direct Clear Inputs (Active LOW)
Q, \overline{Q}	Outputs

Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	5.5V
Operating Free Air Temperature Range	
54	−55°C to +125°C
DM74	0°C to +70°C
Storage Temperature Range	−65°C to +150°C

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter	54122			DM74122			Units
		Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.5	V
V _{IH}	High Level Input Voltage	2			2			V
V _{IL}	Low Level Input Voltage			0.8			0.8	V
I _{OH}	High Level Output Current			−0.8			−0.8	mA
I _{OL}	Low Level Output Current			16			16	mA
T _A	Free Air Operating Temperature	−55		125	−55		70	°C

Recommended Operating Conditions V_{CC} = +5.0V, T_A = +25°C

Symbol	Parameter		Conditions	DM74		Units
				Min	Max	
t _w	Trigger Pulse Width		Over Operating V _{CC} and Temperature Range	40		ns
R _X	External Timing Resistor	XC		5.0	50	kΩ
		XM		5.0	25	
C _X	External Timing Capacitor				No Restrictions	

Electrical Characteristics over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V _I	Input Clamp Voltage	V _{CC} = Min, I _I = −12 mA			−1.5	V
V _{OH}	High Level Output Voltage	V _{CC} = Min, I _{OH} = Max, V _{IL} = Max	2.4			V
V _{OL}	Low Level Output Voltage	V _{CC} = Min, V _{IH} = Min			0.4	V
I _I	Input Current @ Max Input Voltage	V _{CC} = Max, V _I = 5.5V			1	mA
I _{IH}	High Level Input Current	V _{CC} = Max, V _I = 2.4V	Inputs		40	μA
			Clear		80	
I _{IL}	Low Level Input Current	V _{CC} = Max, V _I = 0.4V	Inputs		−1.6	mA
			Clear		−3.2	
I _{OS}	Short Circuit Output Current	V _{CC} = Max (Note 2)	−10		−40	mA
I _{CC}	Supply Current	V _{CC} = Max			28	mA

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.








Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Switching Characteristics

$V_{CC} = +5.0V$, $T_A = +25^\circ C$ (See Section 3 for waveforms and load configurations)

Symbol	Parameter	Conditions	54/74		Units
			$C_L = 15\text{ pF}$ $R_L = 400\Omega$		
			Min	Max	
t_{PLH}	Propagation Delay B to Q	$C_X = 0\text{ pF}, R_X = 5\text{ k}\Omega$ <i>Figure 3-1, Figure a</i>		28	ns
t_{PLH}	Propagation Delay \bar{A} to Q			33	ns
t_{PLH}	Propagation Delay B to \bar{Q}			36	ns
t_{PHL}	Propagation Delay \bar{A} to \bar{Q}			40	ns
t_{PLH}	Propagation Delay \bar{C}_D to \bar{Q}	$C_X = 0\text{ pF}, R_X = 5\text{ k}\Omega$ <i>Figure 3-1, Figure 3-10</i>		40	ns
t_{PHL}	Propagation Delay \bar{C}_D to Q			27	ns
$t_{w(out)}$	Pulse Width at Q with Zero Timing Capacitor	$C_X = 0\text{ pF}, R_X = 5\text{ k}\Omega$ <i>Figure 3-1, Figure a</i>		65	ns
$t_{w(out)}$	Pulse Width with External Timing Components	$C_X = 1000\text{ pF}, R_X = 10\text{ k}\Omega$ <i>Figure 3-1, Figure a</i>	3.08	3.76	μs

Triggering Truth Table


Inputs*					Response
\bar{C}_D	\bar{A}_1	\bar{A}_2	B_1	B_2	
L	X	X	X	X	No Trigger
X		L	X	X	No Trigger
X		X	L	X	No Trigger
H		H	H	H	Trigger
X	X	X		L	No Trigger
X	H	H		X	No Trigger
H	L	X		H	Trigger
	L	X	H	H	Trigger

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

*Input pins 1 and 2 are logically interchangeable, as are input pins 3 and 4.

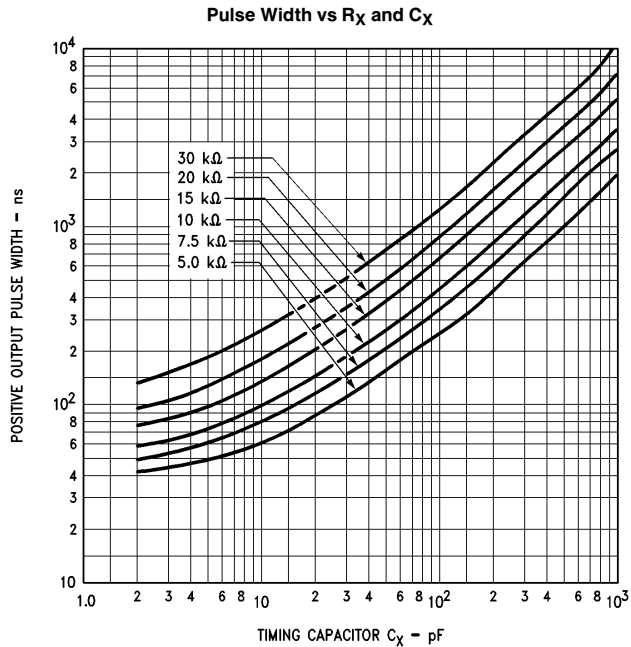

TL/F/10212-3


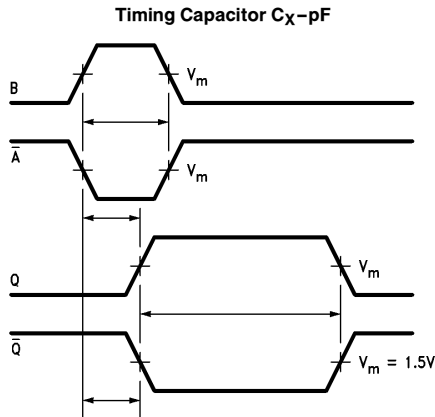


FIGURE A



TL/F/10212-4

Physical Dimensions inches (millimeters)

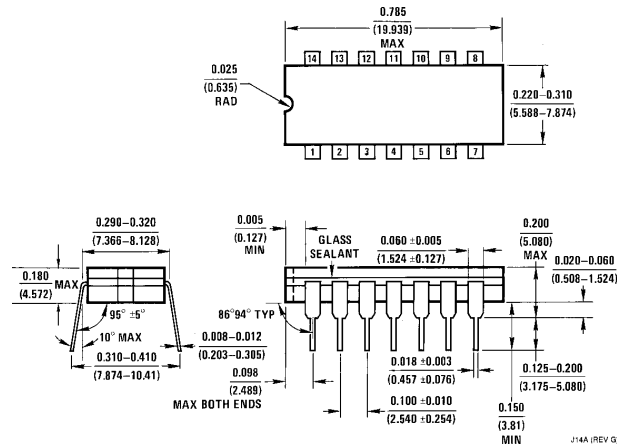

J14A (REV G)


14-Lead Ceramic Dual-In-Line Package (J)
Order Number 54122DMQB
NS Package Number J14A

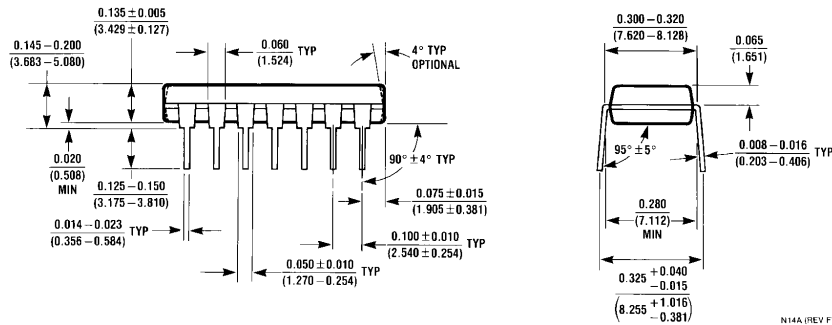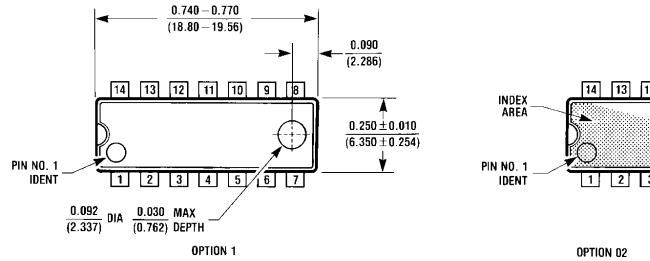

N14A (REV F)

14-Lead Molded Dual-In-Line Package (N)
Order Number DM74122N
NS Package Number N14A

Physical Dimensions inches (millimeters) (Continued)

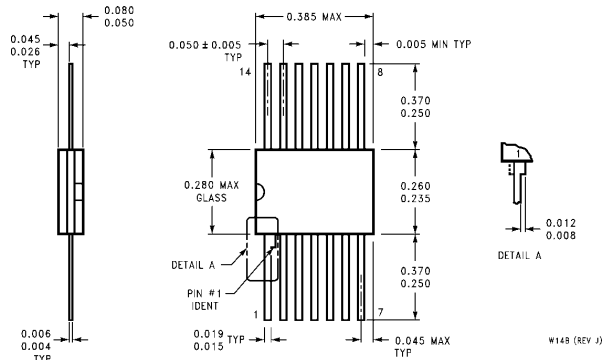

14-Lead Ceramic Flat Package (W)
Order Number 54122FMQB
NS Package Number W14B

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

 National Semiconductor Corporation 1111 West Bardin Road Arlington, TX 76017 Tel: 1(800) 272-9959 Fax: 1(800) 737-7018	National Semiconductor Europe Fax: (+49) 0-180-530 85 86 Email: cnjwge@tevm2.nsc.com Deutsch Tel: (+49) 0-180-530 85 85 English Tel: (+49) 0-180-532 78 32 Français Tel: (+49) 0-180-532 93 58 Italiano Tel: (+49) 0-180-534 16 80	National Semiconductor Hong Kong Ltd. 19th Floor, Straight Block, Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960	National Semiconductor Japan Ltd. Tel: 81-043-299-2309 Fax: 81-043-299-2408
---	---	--	--

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.