

TRIPLE BALANCED MIXER MODEL SMD-3500

WIDE BANDWIDTH


1-3500 MHz

SPECIFICATIONS: (Rev. "B" 01/31/06)

Operating Frequency:		Conversion Loss (dB): (Typ/Max)	
LO / RF:	10 - 3500 MHz		7.8 / 8.7
IF:	1 - 2000 MHz	LO Power:	+17 dBm(Nom)
Isolation (dB):	(Typ/Min)	Input IP3 (dBm): (Typ/Min)	+28 / +23
LO/RF	35/25	1 dB Compression Point:	+14 dBm (Typ)
LO/IF	30/20	Impedance:	50 Ohms (Nom)
RF/IF	25/20	Operating Temperature Range:	-40°C to +85°C



MECHANICAL OUTLINE: 133

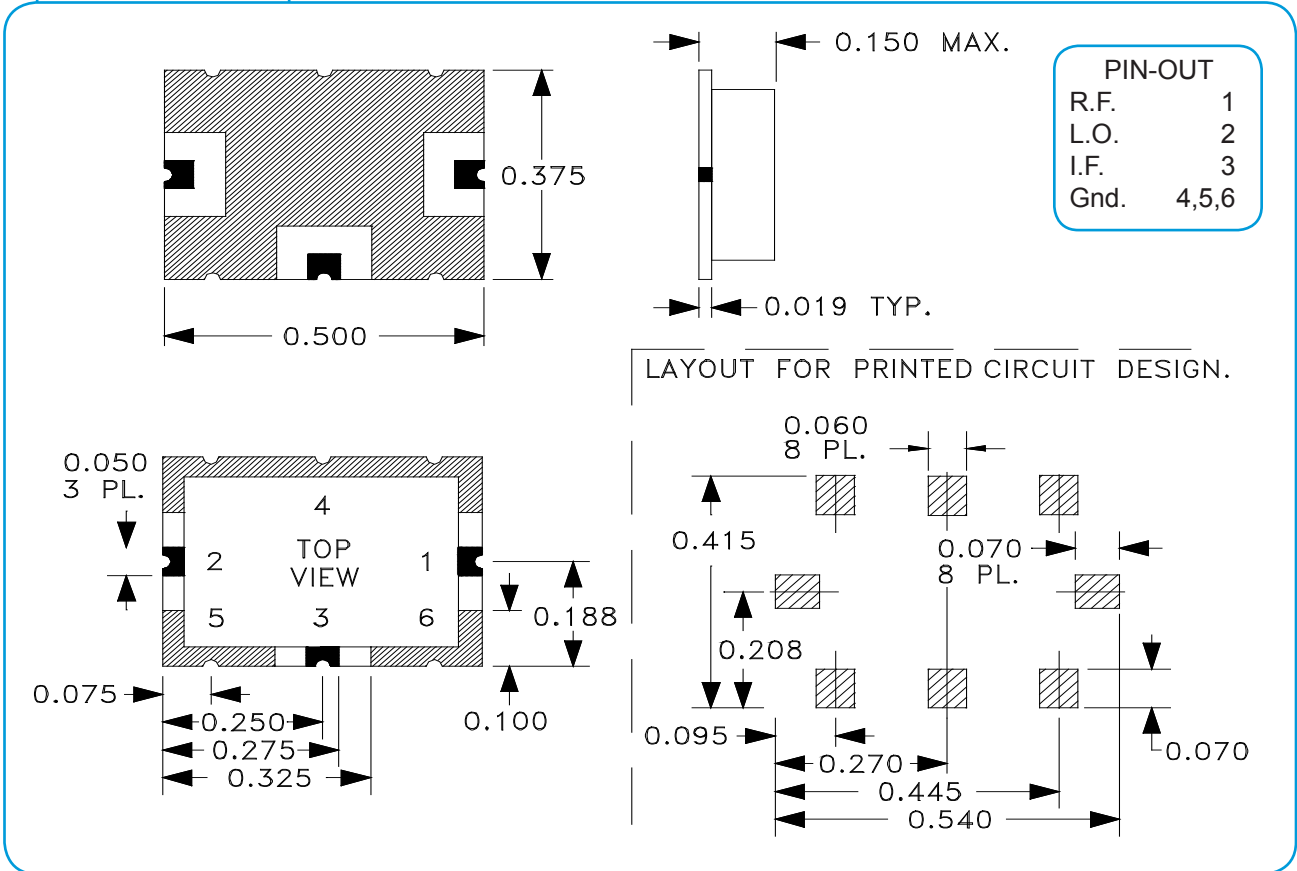

TRIPLE BALANCED MIXER MODEL SMD-3500

WIDE BANDWIDTH

1-3500 MHz

PERFORMANCE PLOTS

