

International IOR Rectifier

30WQ04FNPbF

SCHOTTKY RECTIFIER

3.5 Amp

$$I_{F(AV)} = 3.5\text{Amp}$$

$$V_R = 40\text{V}$$

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	3.5	A
V_{RRM}	40	V
I_{FSM} @tp = 5 μ s sine	500	A
V_F @3 Apk, $T_J = 125^\circ\text{C}$	0.49	V
T_J	-40 to 150	$^\circ\text{C}$

Description/ Features


The 30WQ04FNPbF surface mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC board. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Popular D-PAK outline
- Small foot print, surface mountable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

Case Styles



D-PAK (TO-252AA)



30WQ04FNPbF

Bulletin PD-21053 rev. B 08/06



Voltage Ratings

Part number	30WQ04FNPbF
V _R Max. DC Reverse Voltage (V)	40
V _{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	30WQ...	Units	Conditions
I _{F(AV)} Max. Average Forward Current * See Fig. 5	3.5	A	50% duty cycle @ T _C = 135°C, rectangular wave form
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	500	A	Following any rated load condition and with rated V _{RRM} applied
	80		
E _{AS} Non-Repetitive Avalanche Energy	8.0	mJ	T _J = 25 °C, I _{AS} = 1 Amp, L = 16 mH
I _{AR} Repetitive Avalanche Current	1.0	A	Current decaying linearly to zero in 1 µsec Frequency limited by T _J max. V _A = 1.5 x V _R typical

Electrical Specifications

Parameters	30WQ...	Units	Conditions
V _{FM} Max. Forward Voltage Drop * See Fig. 1 (1)	0.53	V	@ 3A
	0.67	V	@ 6A
	0.49	V	@ 3A
	0.62	V	@ 6A
I _{RM} Max. Reverse Leakage Current * See Fig. 2 (1)	2	mA	T _J = 25 °C
	24	mA	T _J = 125 °C
V _{F(TO)} Threshold Voltage	0.34	V	T _J = T _J max.
r _t Forward Slope Resistance	37.33	mΩ	
C _T Typical Junction Capacitance	189	pF	V _R = 5V _{DC} (test signal range 100Khz to 1Mhz) 25 °C
L _S Typical Series Inductance	5.0	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/µs	(Rated V _R)

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	30WQ...	Units	Conditions
T _J Max. Junction Temperature Range (*)	-40 to 150	°C	
T _{stg} Max. Storage Temperature Range	-40 to 150	°C	
R _{thJC} Max. Thermal Resistance Junction to Case	4.7	°C/W	DC operation * See Fig. 4
wt Approximate Weight	0.3 (0.01)	g (oz.)	
Case Style	D - PAK		Similar to TO-252AA
Marking Device	30WQ04FN		

(*) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

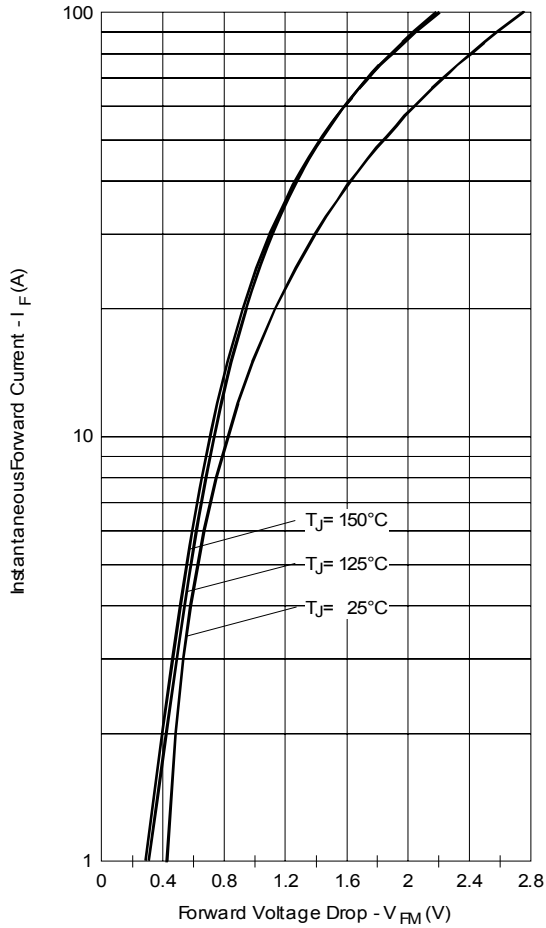


Fig. 1 - Maximum Forward Voltage Drop Characteristics

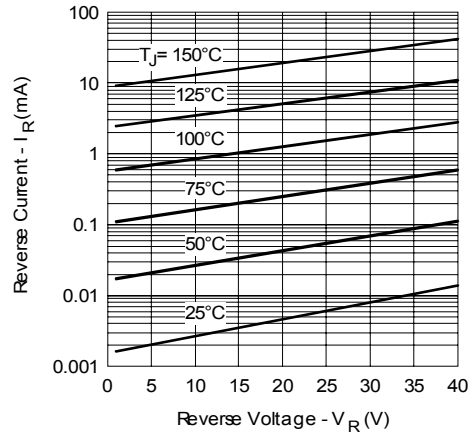


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

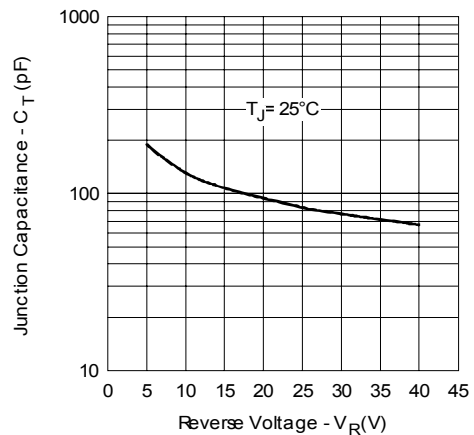


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

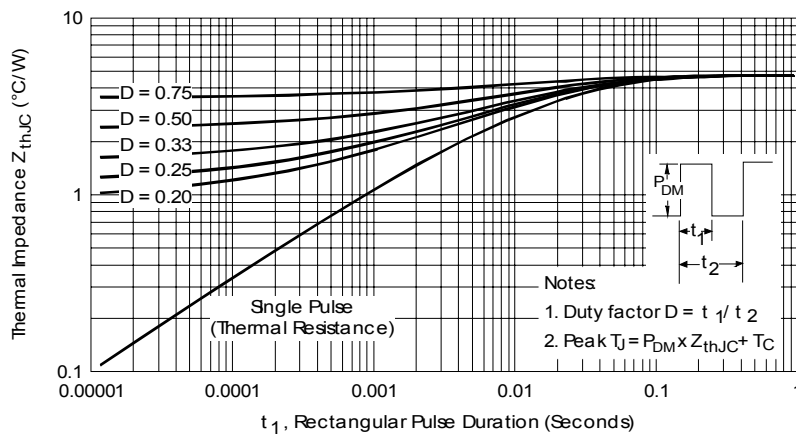


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

30WQ04FNPbF

Bulletin PD-21053 rev. B 08/06

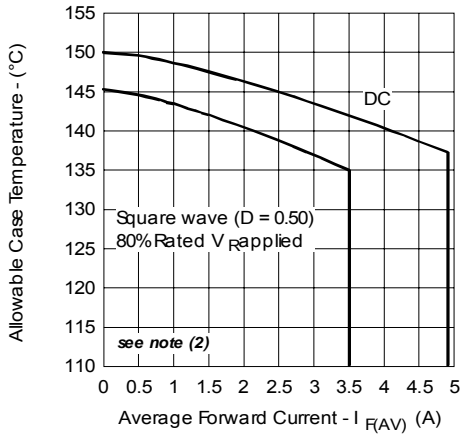


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

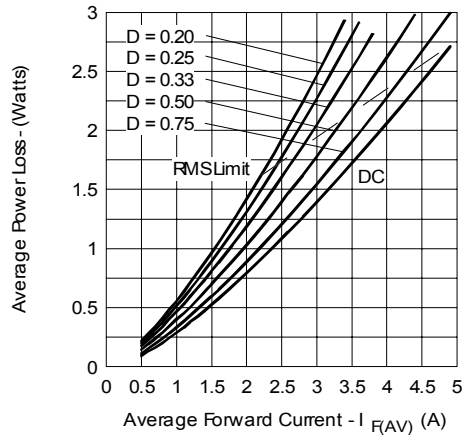


Fig. 6 - Forward Power Loss Characteristics

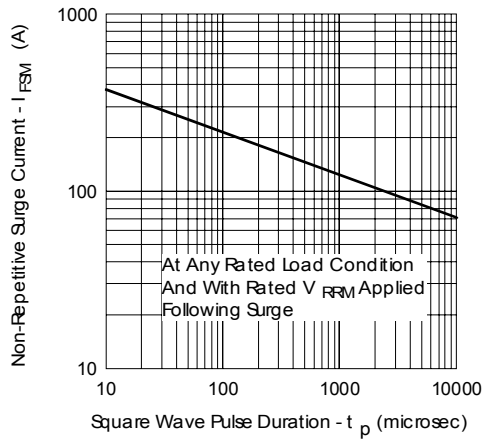


Fig. 7 - Maximum Non-Repetitive Surge Current

(2) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Outline Table

NOTES

- 1- DIMENSIONS AND TOLERANCES PER ASME Y14.3M-1994
- 2- DIMENSION ARE SHOWN IN INCHES (MILLIMETERS)
- 3- LEAD DIMENSION UNCONTROLLED IN 1.0
- 4- DIMENSION D1, E1, L3 & M3 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THERMAL PAD.
- 5- SECTION C-C DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .005 AND 0.10 [0.13 AND 0.25] FROM THE LEAD TIP.
- 6- DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .006 [0.15] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
- 7- DIMENSION D1 & E1 APPLIED TO BASIC METAL ONLY.
- 8- DATUM A & B TO BE DETERMINED AT DATUM PLANE M.
- 9- OUTLINE CONFORMS TO JEDEC OUTLINE TO-252AA.

SYMBOL	DIMENSIONS		MIN.	MAX.
	MILLIMETERS	INCHES		
A	2.18	2.39	.086	.094
A1	-	0.15	-	.006
B	0.64	0.89	.025	.031
B1	0.65	0.79	.025	.031
B2	0.76	1.14	.030	.045
B3	4.95	5.48	.195	.215
C	0.46	0.61	.018	.024
C1	0.41	0.56	.016	.022
C2	0.48	0.89	.018	.035
D	9.97	9.22	.395	.345
D1	5.21	-	.205	-
E	6.36	6.73	.250	.265
E1	4.32	-	.170	-
F	2.29	BSC	.090	BSC
H	9.40	10.41	.370	.410
L	1.40	1.78	.055	.070
L1	2.74	BSC	TOP REF.	-
L2	0.31	BSC	.020	BSC
L4	0.99	1.27	.039	.050
L5	-	1.02	-	.040
M	1.14	1.52	.045	.060
M	0°	30°	0°	10°
M1	0°	15°	0°	15°
M2	25°	35°	25°	35°

LEAD ASSIGNMENTS

HEXLET

- 1- GATE
- 2- DRAIN
- 3- SOURCE
- 4- DRAIN

UG1 & OutPAK

- 1- GATE
- 2- COLLECTOR
- 3- EMITTER
- 4- COLLECTOR

Modified JEDEC outline TO-252AA
 Dimensions in millimeters and (inches)

Part Marking Information

EXAMPLE: THIS IS A 30WQ04FN
 LOT CODE 8024
 ASSEMBLED ON WW 02, 2000


INTERNATIONAL
 RECTIFIER
 LOGO

ASSEMBLY
 LOT CODE

PART NUMBER

DATE CODE
 P = LEAD-FREE
 YEAR 0 = 2000
 WEEK 02
 X = SITE ID

Tape & Reel Information

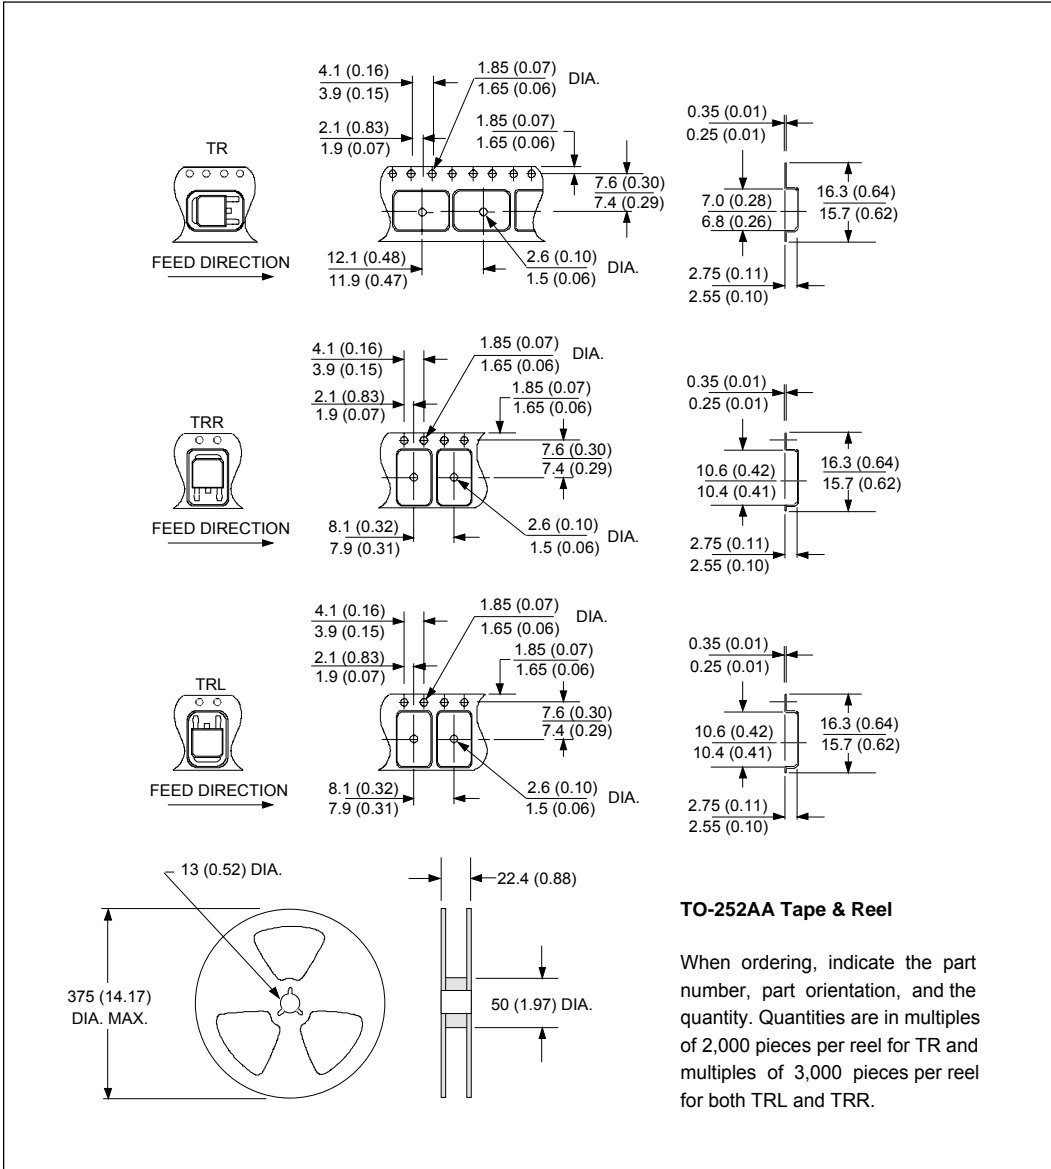

```

30WQ04FN
*****
* This model has been developed by *
* Wizard SPICE MODEL GENERATOR (1999) *
* (International Rectifier Corporation) *
* contains Proprietary Information *
*****
* SPICE Model Diode is composed by a *
* simple diode plus paralalled VCG2T *
*****
.SUBCKT 30WQ04FN ANO CAT
D1 ANO 1 DMOD (0.01614)
*Define diode model
.MODEL DMOD D(IS=1.1021044955238E-04A,N=1.03763733127871,BV=53V,
+ IBV=0.225832353615935A,RS= 0.000439008,CJO=6.29671162330771E-08,
+ VJ=0.169606385579256,XTI=2, EG=0.72244495735053)
*****
*Implementation of VCG2T
VX 1 2 DC 0V
R1 2 CAT TRES 1E-6
.MODEL TRES RES(R=1,TC1=96.5402599365199)
GP1 ANO CAT VALUE={-ABS(I(VX))*EXP(((((-3.005809E-03/96.54026)*((V(2,CAT)*1E6)/(I(VX)+1E-6)-
1))+1)*6.266778E-02*ABS(V(ANO,CAT))))-1}}
*****
.ENDS 30WQ04FN

Thermal Model Subcircuit
.SUBCKT 30WQ04FN 5 1

CTHERM1 5 4 8.75E-04
CTHERM2 4 3 5.09E+01
CTHERM3 3 2 3.62E+02
CTHERM4 2 1 2.35E+03

R THERM1 5 4 1.00E-07
R THERM2 4 3 2.07E+00
R THERM1 3 2 1.92E+00
R THERM1 2 1 7.07E-01

.ENDS 30WQ04FN
    
```

30WQ04FNPbF

Bulletin PD-21053 rev. B 08/06

International
IR Rectifier

Ordering Information Table

Device Code	
30	W
Q	04
FN	TRL
PbF	
①	②
③	④
⑤	⑥
⑦	

1	-	Current Rating (3.5A)
2	-	Package Identifier W = D-Pak
3	-	Schottky "Q" Series
4	-	Voltage Rating (04 = 40V)
5	-	FN = TO-252AA (D-Pak)
6	-	<ul style="list-style-type: none">• none = Tube (50 pieces)• TR = Tape & Reel• TRL = Tape & Reel (Left Oriented)• TRR = Tape & Reel (Right Oriented)
7	-	<ul style="list-style-type: none">• none = Standard Production• PbF = Lead-Free

Data and specifications subject to change without notice.
This product has been designed and qualified for AEC Q101 Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 08/06