

TDK DC to DC Converters, DC to AC Inverters

1.5W

40E D ■ 8821248 0004995 5 ■ TDKA

[查询"CAK-001MF"供应商](#)


T D K C O R P

T-57-11


CAK SERIES DC TO DC CONVERTERS

FEATURES

- No electrolytic capacitors used, ensuring long life and high reliability.
- High output voltage stability.
- Floating input and output.
- Low ripple and noise voltage.
- External components are unnecessary.

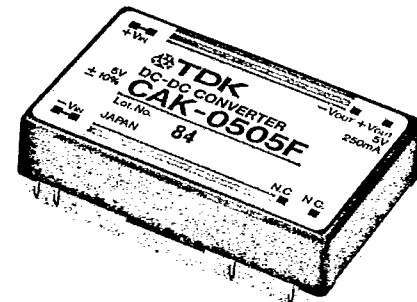


SHAPES AND DIMENSIONS

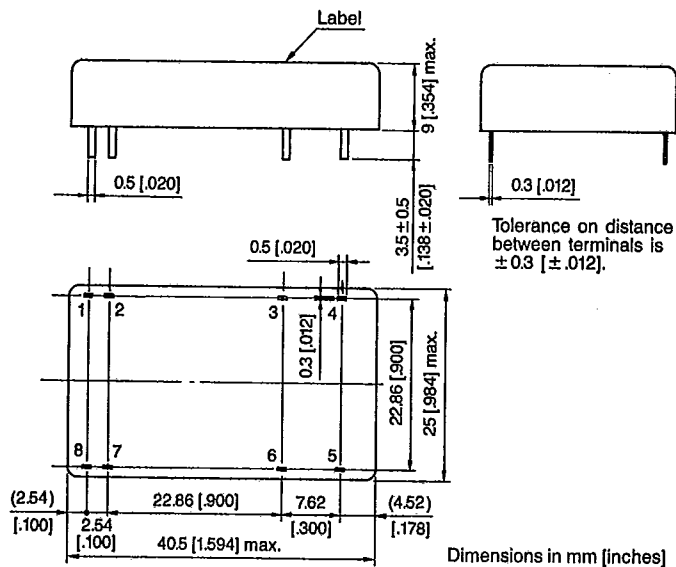

TEMPERATURE AND HUMIDITY RANGES


Operating temperature	-10 to +70°C [+14 to +158°F] (at 50°C [122°F] or above, refer to derating curve.)
Storage temperature	-20 to +85°C [-4 to +185°F]
Humidity	95% max. (Maximum wet bulb temperature: 38°C [100.4°F])

Derating curve

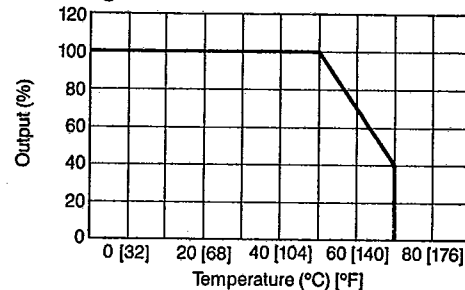


Terminal pin configuration

CAK-□□□□F series (single output type)

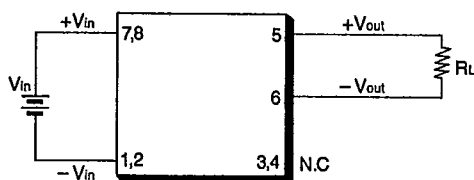

CAK-00□□F series (dual output type)

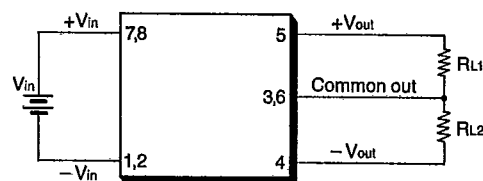

Terminal pin No.	Part No.	
	CAK-□□□□F	CAK-00□□F
1	- Vin	- Vin
2	- Vin	- Vin
3	No connection	Common out
4	No connection	- Vout
5	+ Vout	+ Vout
6	- Vout	Common out
7	+ Vin	+ Vin
8	+ Vin	+ Vin

TDK DC to DC Converters, DC to AC Inverters

1.5W

40E D ■ 8821248 0004996 7 ■ TDKA

[查询"CAK-001MF"供应商](#)

T D K CORP

T-57-11

ELECTRICAL CHARACTERISTICS

Part No.	Input voltage (V)	Output*1 voltage (V)	Output current (mA)	Ripple and noise voltage*2 (% p-p)	Output voltage stability depending on:			Efficiency*3 (%) min.	Input-output isolation	Weight (g)
					Input (%) typ.	Load (%) typ.	Temp. (%/°C) typ.			
CAK-0505F	5 ± 10%	5 ± 5%	0 to 250	1.0	0.05	0.4	0.01	60	Dielectric strength 1 minute 500Vac Resistance 50MΩ min. 500Vdc	15
CAK-1205F	12 ± 10%									
CAK-2405F	24 ± 10%									
CAK-0512F	5 ± 10%	12 ± 5%	0 to 150	1.0	0.06	0.25	0.01			
CAK-1212F	12 ± 10%									
CAK-2412F	24 ± 10%									
CAK-0515F	5 ± 10%	15 ± 5%	0 to 130	1.0	0.07	0.2	0.01			
CAK-1215F	12 ± 10%									
CAK-2415F	24 ± 10%									
CAK-001AF	5 ± 10%	± 12 ± 5%	(0 to 60) × 2	1.0	0.03	0.03	0.01	50	Dielectric strength 1 minute 500Vac Resistance 50MΩ min. 500Vdc	15
CAK-001LF	12 ± 10%									
CAK-001MF	24 ± 10%									
CAK-002AF	5 ± 10%	± 15 ± 5%	(0 to 50) × 2	1.0	0.03	0.03	0.01			
CAK-002LF	12 ± 10%									
CAK-002MF	24 ± 10%									

*1 Tolerance of output voltage includes fluctuations in the input (± 10%), load (0 to 100%) and temperature (− 10 to +70°C [14 to 158°F]). Ripple and noise voltage are included.

*2 Measured with a 50MHz bandwidth.

*3 Maximum load at typical input voltage.