

# 5x7mm Surface Mount High Precision TCXO

In Stock at Digi-Key

CONNOR  
WINFIELD



2111 Comprehensive Drive

Aurora, Illinois 60505

Phone: 630-851-4722

Fax: 630-851-5040

www.conwin.com

US Headquarters


630-851-4722:

European Headquarters:

+353-61-472221

## Description

The Connor-Winfield's D75A - Series are 5x7mm Surface Mount Temperature Compensated Crystal Controlled Oscillators (TCXO) with a Tri-State LVCMOS output. Through the use of Analog Temperature Compensation, the D75A - Series are capable of holding sub 1-ppm stabilities over the 0 to 70°C temperature range.



## Features

### Model D75A

TCXO  
3.3V Operation  
LVCMOS Output Logic  
Frequency Stability:  $\pm 0.28$ ppm  
Temperature Range: 0 to 70°C  
Low Jitter < 1ps RMS  
Tri-State Enable/Disable Function  
5x7mm Surface Mount Package  
Tape and Reel Packaging  
RoHS Compliant / Lead Free ✓ RoHS

## Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Note
Storage Temperature	-55	-	85	°C	
Supply Voltage (Vcc)	-0.5	-	6.0	Vdc	
Input Voltage	-0.5	-	Vcc+0.5	Vdc	

## Operating Specifications

Parameter	Minimum	Nominal	Maximum	Units	Note
Frequencies Available (Fo)		10.0, 12.8, 19.2, 20.0		MHz	
Frequency Calibration @ 25 C	-1.00	-	1.00	ppm	1
Frequency Stability $[\pm(F_{max} - F_{min})/2.F_o]$	-0.28	-	0.28	ppm	2
Holdover Stability (Over 24 Hours)	-0.32	-	0.32	ppm	3
Supply Voltage Variation (Vcc $\pm 5\%$ )	-0.20	-	0.20	ppm	
Load Coefficient ( $\pm 5\%$ )	-0.20	-	0.20	ppm	
Static Temperature Hysteresis	-	-	0.40	ppm	Absolute, 4
Total Frequency Tolerance	-4.60	-	4.60	ppm	5
Temperature Range	0	-	70	C	
Supply Voltage (Vcc)	3.135	3.3	3.465	Vdc	
Supply Current (Icc)	-	-	6	mA	
Period Jitter	-	3	5	ps rms	
Phase Jitter (BW=12kHz to 20MHz)	-	0.5	1	ps rms	
SSB Phase Noise at 10Hz offset	-	-80		dBc/Hz	
SSB Phase Noise at 100Hz offset	-	-110		dBc/Hz	
SSB Phase Noise at 1KHz offset	-	-135		dBc/Hz	
SSB Phase Noise at 10KHz offset	-	-150		dBc/Hz	
SSB Phase Noise at >100KHz offset	-	-150		dBc/Hz	

## Input Characteristics For Enable / Disable Function (Pin 8)

Parameter	Minimum	Nominal	Maximum	Units	Note
Enable Voltage (High) or open circuit (Vih)	70%Vcc	-	-	Vdc	6
Disable Voltage (Low) Output Tri-stated (Vil)	-	-	30%Vcc	Vdc	

## LVCMOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Note
LOAD	-	15	-	pF	7
Voltage (High) (Voh)	90%Vcc	-	-	Vdc	
(Low) (Vol)	-	-	10%Vcc	Vdc	
Current (High) (Ioh)	-4	-	-	mA	
(Low) (Iol)	-	-	4	mA	
Duty Cycle at 50% of Vcc	45	50	55	%	
Rise / Fall Time 10% to 90%	-	-	8	ns	

### Note:

- 1) Initial calibration @ 25 C. Specifications at time of shipment after 48 hours of operation
- 2) Frequency stability vs. change in temperature.
- 3) Inclusive of frequency stability, supply voltage change ( $\pm 1\%$ ), load change, aging, for 24 hours
- 4) Frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at 25°C.
- 5) Inclusive of calibration @ 25 C, frequency vs. change in temperature, change in supply voltage ( $\pm 5\%$ ), load change ( $\pm 5\%$ ), reflow soldering process and 20 years aging, referenced to Fo.
- 6) Leave Pad 8 unconnected if enable / disable function is not required. When tri-stated, the output stage is disabled but the oscillator and compensation circuit are still active (current consumption  $\leq 1$  mA).
- 7) For best performance it is recommended that the circuit connected to this output should have an equivalent input capacitance of 15pF.

Specifications subject to change without notice. All dimensions in inches. © Copyright 2008 The Connor-Winfield Corporation



Bulletin Tx236

Page 1 of 2

Revision 00

Date 01 Oct 2008




## Package Characteristics

Package Ceramic Surface Mount Package.


## Environmental Characteristics

Vibration:	Vibration per Mil Std 883E Method 2007.3 Test Condition A
Shock:	Mechanical Shock per Mil Std 883E Method 2002.4 Test Condition B.
Soldering:	SMD product suitable for Convection Reflow soldering. Peak temperature 260 C. Maximum time above 220 C, 60 seconds.
Solderability:	Solderability per Mil Std 883E Method 2003


## Design Recommendations

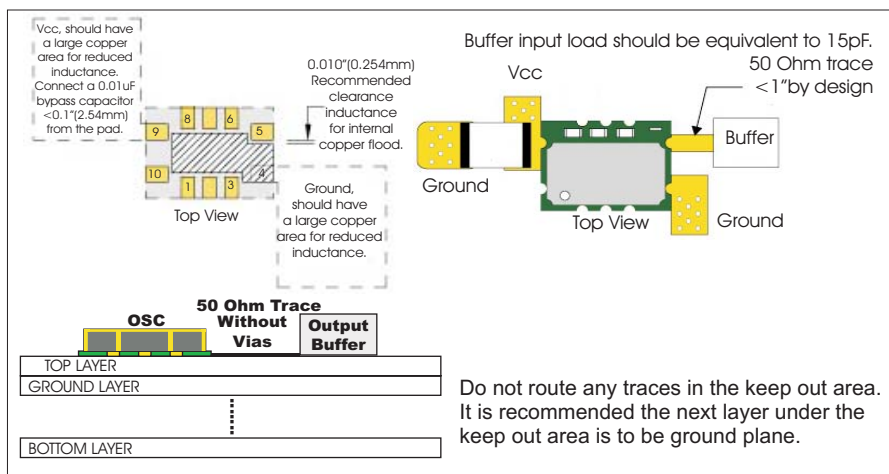

## Package Layout

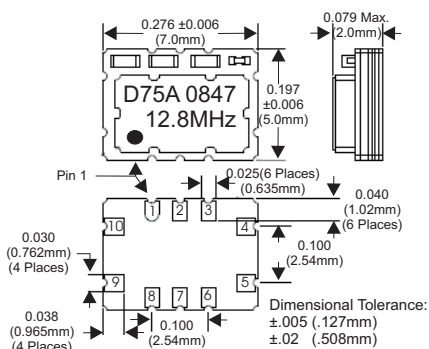

## Suggested Pad Layout

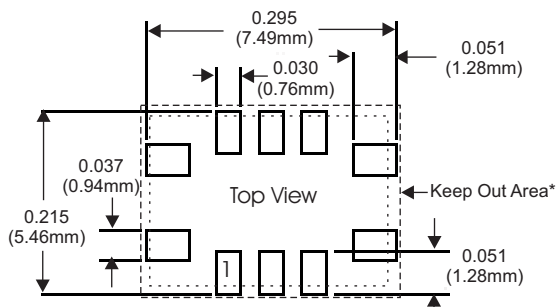

\* Do not route any traces in the keep out area. It is recommended the next layer under the keep out area is to be ground plane.

## Ordering Information

D75A - 010.0MHZ \*  
D75A - 012.8MHZ \*  
D75A - 019.2MHZ \*  
D75A - 020.0MHZ \*


TCXO SERIES CENTER FREQUENCY

\* For the tape and reel option, add -T to the end of the part number.  
Example: D75A-012.8 MHZ -T


## Pad Connections

Pad	Connection
1	Do not connect
2	Do not connect
3	Do not connect
4	Ground
5	Output
6	Do not connect
7	Do not connect
8	Tri-state Enable / Disable
9	Supply, Vcc
10	Do not connect


## Output Waveform




## Test Circuit

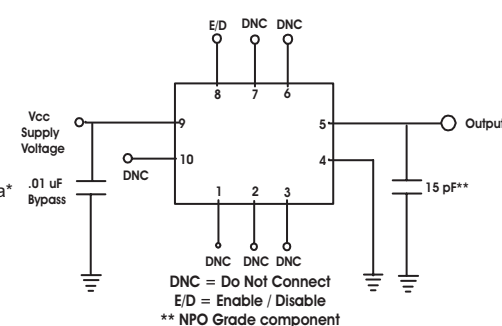

## Tape and Reel Information

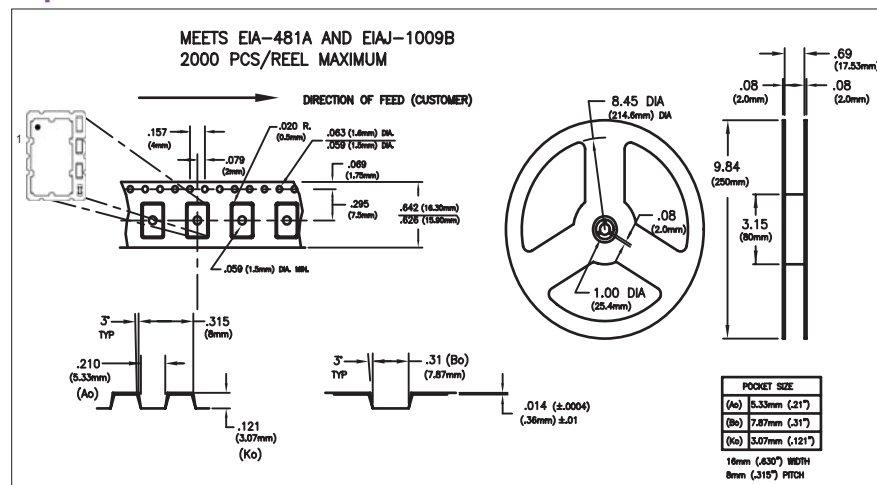

## Solder Profile

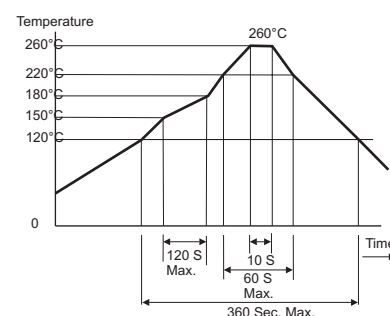

US Headquarters:  
630-851-4722  
European Headquarters:  
+353-61-472221

Bulletin	Tx236
Page	2 of 2
Revision	00
Date	01 Oct 2008