
147 Central Avenue Hackensack, New Jersey 07601 Tel: 201-489-8989 • Fax: 201-489-6911



## 5331H Series T-1 3/4 Vertical LED Assembly

## DESCRIPTION AND FEATURES

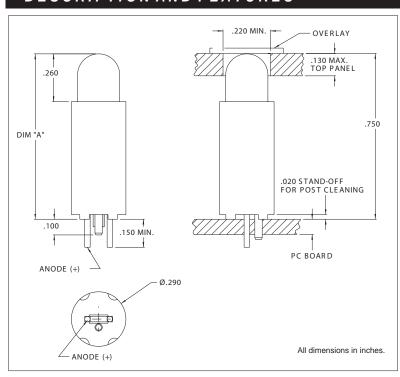

## Features

- Block mounting design assures height and side-by-side spacing-alignment saves assembly costs.
- •Ultra Brite T-1 3/4 LED lamp, non-diffused narrow beam high intensity light.
- •Press-in mounting pin secures assembly to PC board for soldering.
- •Standoffs prevent flux entrapment.

Housing: Black Nylon, UL94V-O

Note: Alternate LEDs are also available in this package as a standard variation.

Mounting hole pattern on page 1-X6.

## ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	E mitted C olor	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse	Peak	Peak Forward
					Typ. (V)	Max. (V)	Breakdown Voltage Min.	Wavelength (nm)	Current at 1MS-300 PPS (A)
		,,	(******)	(IIIA)	( • /	( V )	(V)	, ,	(A)
5331H1	Red	68	20	60	2.1	3.0	5	650	.1
5331H5	Green	100	20	60	2.2	3.0	5	563	.09
5331H7	Yellow	160	20	60	2.2	3.0	5	585	.1