

Surface Mount

High Reliability Mixer

ADE-R5LH+

Level 10 (LO Power +10 dBm) 10 to 1500 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing

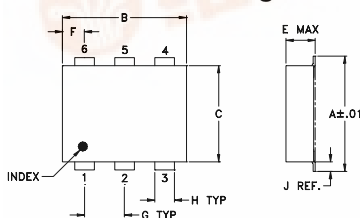

PCB Land Pattern


Suggested Layout,
Tolerance to be within ±0.02

Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

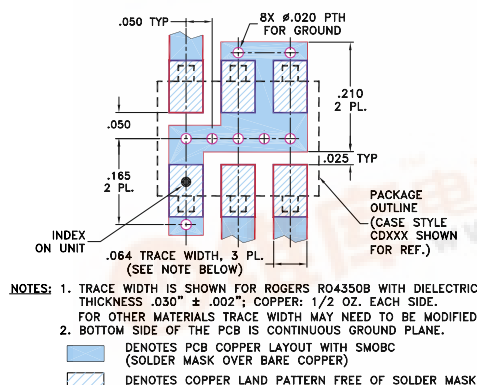

Features

- hermetically sealed ceramic quad
- low conversion loss, 7.2 dB typ.
- excellent L-R isolation, 55 dB typ.
- excellent IP3, 17 dBm
- low profile package
- aqueous washable
- protected by US Patent 6,133,525

Applications

- cellular
- PCS

CASE STYLE: CD542

PRICE: \$3.85 ea. QTY. (10-49)

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)						
LO/RF f_L - f_U	IF	Mid-Band m		Total Range Max.		L	M	U	L	M	U							
		$\bar{X}$	σ	Max.	Max.													
		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.		Typ.					
10-1500	DC-1000	7.2	0.10	8.2	9.5	65	50	55	40	42	27	50	37	45	28	30	20	15


1 dB COMP.: +5 dBm typ.
Phase detection, positive polarity

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO					
		LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
10.10	40.10	6.69	68.93	72.82	1.92	1.23
130.10	160.10	6.87	65.42	52.06	1.42	1.49
250.10	280.10	6.77	63.17	50.64	1.44	1.55
350.10	380.10	6.81	60.80	50.63	1.56	1.58
450.10	480.10	6.88	62.07	50.33	1.57	1.62
550.10	580.10	6.98	54.44	49.75	1.65	1.67
610.10	640.10	6.89	53.57	47.38	1.54	1.72
650.10	680.10	6.93	55.53	45.72	1.56	1.72
710.10	740.10	7.11	69.22	44.40	1.61	1.78
750.10	780.10	7.30	74.48	46.39	1.59	1.79
810.10	840.10	7.47	70.35	56.47	1.68	1.87
850.10	880.10	7.41	69.05	58.34	1.57	1.86
950.10	980.10	7.23	55.99	43.36	1.55	1.90
1010.10	1040.10	7.23	50.14	40.00	1.50	2.00
1050.10	1080.10	7.20	47.67	38.54	1.51	1.97
1150.10	1180.10	7.16	44.23	36.10	1.37	2.06
1250.10	1280.10	7.50	42.38	36.34	1.21	2.15
1350.10	1380.10	7.48	40.25	34.12	1.07	2.20
1450.10	1480.10	7.15	36.47	28.53	1.30	2.20
1510.10	1540.10	7.20	34.45	26.65	1.43	2.27

Electrical Schematic

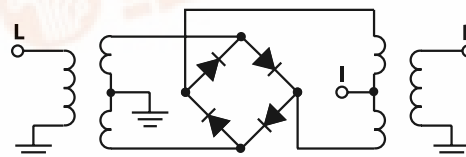

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

REV. OR
M109914
ADE-R5LH+
ED-12873/13
WL/TD/QL
070516
Page 1 of 2

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



