


查询#555-0200-01#供应商

3mm Single Pole Connectors

A range of 3mm plugs and sockets which offers ideal interfacing for educational and electronic systems.

Plug


This plug has a wide clamp connection and a rigid acetal moulding. Rated at 5 A.



| Colour | Order Code |
|--------|------------|
| Black | 560-0100 |
| Blue | 560-0200 |
| Brown | 560-0300 |
| Green | 560-0400 |
| Red | 560-0500 |
| White | 560-0600 |
| Yellow | 560-0700 |

Socket Panel Mounting

Tin plated solder connections and an acetal moulding supplied with a locknut for ease of panel mounting. Rated at 5 A.

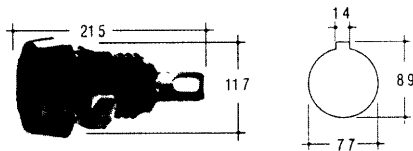

For suitable punch and die for front panel mounting, order 911-0020. See page 34.


| Colour | Order Code |
|--------|------------|
| Black | 561-0100 |
| Blue | 561-0200 |
| Brown | 561-0300 |
| Green | 561-0400 |
| Red | 561-0500 |
| White | 561-0600 |
| Yellow | 561-0700 |

4mm Single Pole Connectors and Accessories

A 4mm range of products offering many unique features and manufactured to a very high standard. This series of products caters for a broad range of instrumentation and speaker applications. All contact material is nickel plated unless otherwise stated.

Standard Plug


This plug has solder bucket termination, a rigid screw-on acetal moulding and a stainless steel contact spring. Rated at 10 A.



| Colour | Order Code |
|--------|------------|
| Black | 550-0100 |
| Blue | 550-0200 |
| Brown | 550-0300 |
| Green | 550-0400 |
| Red | 550-0500 |
| White | 550-0600 |
| Yellow | 550-0700 |

Standard Plug with Large Solder Bucket Termination

This range features large solder bucket connection that will accept conductors up to 5.5mm in diameter. The product is also supplied with a large diameter insulating cover that accepts cable up to 7.1mm in diameter. Incorporated in the product is a stainless steel contact spring. Rated at 10 A.



The range is now available with 0.5 micron gold plating for reduced contact resistance. When used in audio applications this can improve signal losses between mated pairs.


Plugs with order codes 583 and 584 feature solder, screw or crmp termination.



| Colour | Order Code | |
|--------|---------------|-------------|
| | Nickel Plated | Gold Plated |
| Black | 579-0100 | 580-0100 |
| Blue | 579-0200 | 580-0200 |
| Brown | 579-0300 | 580-0300 |
| Green | 579-0400 | 580-0400 |
| Red | 579-0500 | 580-0500 |
| White | 579-0600 | 580-0600 |
| Yellow | 579-0700 | 580-0700 |
| Black | 583-0100 | 584-0100 |
| Red | 583-0500 | 584-0500 |

Triple Contact Plug


A very reliable plug with a screw connection for the lead wire and a screw-on rigid acetal moulding. Accepts cables of 7.1mm diameter and a conductor of 3.5mm diameter. Rated at 10 A.



| Colour | Order Code |
|--------|------------|
| Black | 557-0100 |
| Blue | 557-0200 |
| Brown | 557-0300 |
| Green | 557-0400 |
| Red | 557-0500 |
| White | 557-0600 |
| Yellow | 557-0700 |

Stackable Plug


This in-line stackable plug has a screw connection for lead wire and a push-on pliable PVC moulding. Rated at 10 A.



| Colour | Order Code |
|--------|------------|
| Black | 553-0100 |
| Blue | 553-0200 |
| Brown | 553-0300 |
| Green | 553-0400 |
| Red | 553-0500 |
| White | 553-0600 |
| Yellow | 553-0700 |

Bunch Pin Stackable Plug


This in-line stackable plug has a screw connection for lead wire and a push-on pliable PVC moulding. Rated at 20 A.



| Colour | Order Code |
|--------|------------|
| Black | 558-0100 |
| Blue | 558-0200 |
| Brown | 558-0300 |
| Green | 558-0400 |
| Red | 558-0500 |
| White | 558-0600 |
| Yellow | 558-0700 |

Bunch Pin Side Stackable Plug

This side stackable plug has a screw connection for lead wire and a push-on pliable PVC moulding. Rated at 20 A.



| Colour | Order Code |
|--------|------------|
| Black | 555-0100 |
| Blue | 555-0200 |
| Brown | 555-0300 |
| Green | 555-0400 |
| Red | 555-0500 |
| White | 555-0600 |
| Yellow | 555-0700 |