


# .050" Color Coded Flat Cable

26 AWG Stranded, PVC

3811 Series

[查询"3811/10"供应商](#)

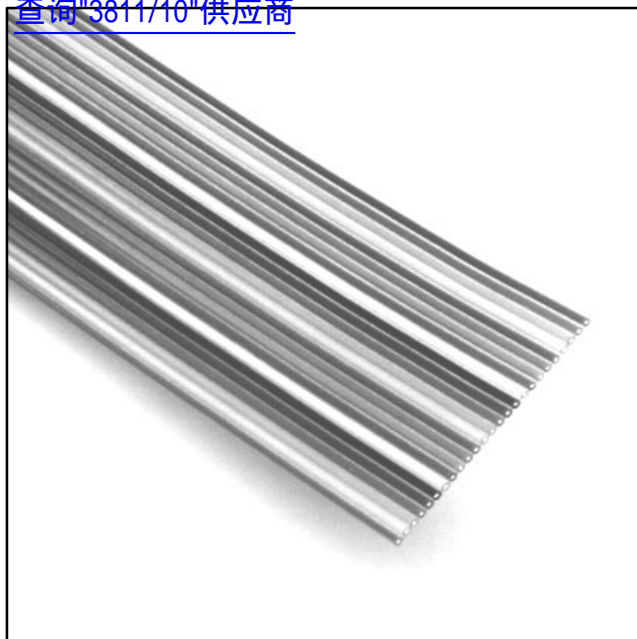

- .050 inch centers permit mass termination to a broad line of IDC connectors
- 26 AWG wire allows for higher power levels
- Stranded wire provides flexibility and extended product life
- Zippable for branching or discrete termination
- Color coded for wire identification

Date Modified: February 19, 1999

TS-0122-08  
Sheet 1 of 2

41



## Physical

### Insulation

Material: Polyvinyl Chloride (PVC)  
Color: 10 Color Repeat, Clear Carrier

### Marking

Standard: None

Canadian Option:  AWM 20462 105C 300V VW1 3M NU  AWM IA 80C 150V FT1  
EU <50V

**Conductors:** 26 AWG 7 × 34 [ 7 × 0.160 ] Tinned Stranded Copper

## Electrical

**Voltage Rating:** USA: 300V      Canada: 150V      EU: <50V

**Insulation Resistance:**  $> 1 \times 10^9 \Omega/10 \text{ ft. [ 3m ]}$

**Characteristic Impedance** Unbalanced: 95  $\Omega$

**Capacitance** Unbalanced: 14.8 pF/ft. [ 48.6 pF/m ]

**Inductance** Unbalanced: .13  $\mu\text{H/ft. [ 0.43 } \mu\text{H/m ]}$

**Propagation Delay** Unbalanced: 1.41 ns/ft. [ 4.63 ns/m ]

**Velocity of Propagation** Unbalanced: 72%

Note: Unbalanced is measured between ground-signal-ground conductors.

## Environmental

**Temperature Rating:** USA: -20°C to +105°C      Canada: -20°C to +80°C

**Flammability Rating:** USA: VW-1      Canada: FT1

UL File No.: E42769, Style No.: 20462

### 3M Interconnect Solutions Division

6801 River Place Blvd.  
Austin, TX 78726-9000

For technical, sales or ordering information call  
**800-225-5373**


# .050" Color Coded Flat Cable

26 AWG Stranded, PVC

3811 Series

[查询"3811/10"供应商](#)

Number of Conductors	3M Part Number	Dimension A	Dimension B
09	<b>3811/09</b>	0.450 ± .015 [ 11.43 ]	0.400 ± .010 [ 10.16 ]
10	<b>3811/10</b>	0.500 ± .015 [ 12.70 ]	0.450 ± .010 [ 11.43 ]
14	<b>3811/14</b>	0.700 ± .015 [ 17.78 ]	0.650 ± .010 [ 16.51 ]
15	<b>3811/15</b>	0.750 ± .015 [ 19.05 ]	0.700 ± .010 [ 17.78 ]
16	<b>3811/16</b>	0.800 ± .020 [ 20.32 ]	0.750 ± .015 [ 19.05 ]
18	<b>3811/18</b>	0.900 ± .020 [ 22.86 ]	0.850 ± .015 [ 21.59 ]
20	<b>3811/20</b>	1.000 ± .020 [ 25.40 ]	0.950 ± .015 [ 24.13 ]
24	<b>3811/24</b>	1.200 ± .020 [ 30.48 ]	1.150 ± .015 [ 29.21 ]
25	<b>3811/25</b>	1.250 ± .020 [ 31.75 ]	1.200 ± .015 [ 30.48 ]
26	<b>3811/26</b>	1.300 ± .020 [ 33.02 ]	1.250 ± .015 [ 31.75 ]
30	<b>3811/30</b>	1.500 ± .025 [ 38.10 ]	1.450 ± .020 [ 36.83 ]
34	<b>3811/34</b>	1.700 ± .025 [ 43.18 ]	1.650 ± .020 [ 41.91 ]
36	<b>3811/36</b>	1.800 ± .025 [ 45.72 ]	1.750 ± .020 [ 44.45 ]
37	<b>3811/37</b>	1.850 ± .025 [ 46.99 ]	1.800 ± .020 [ 45.72 ]
40	<b>3811/40</b>	2.000 ± .025 [ 50.80 ]	1.950 ± .020 [ 49.53 ]
50	<b>3811/50</b>	2.500 ± .025 [ 63.50 ]	2.450 ± .020 [ 62.23 ]
60	<b>3811/60</b>	3.000 ± .025 [ 76.20 ]	2.950 ± .020 [ 74.93 ]
64	<b>3811/64</b>	3.200 ± .025 [ 81.28 ]	3.150 ± .020 [ 80.01 ]

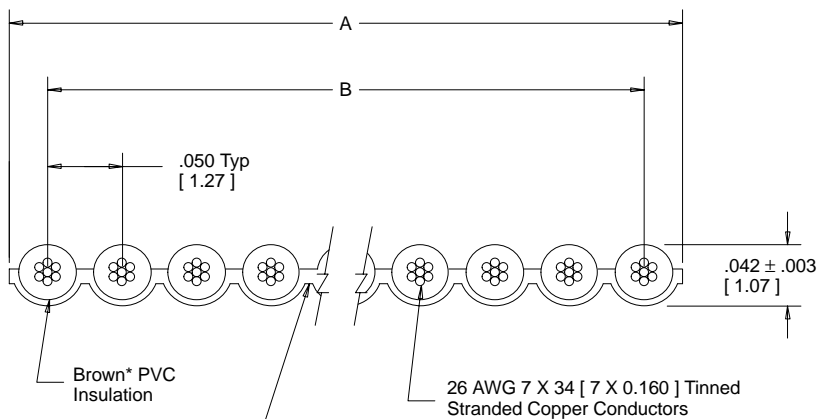


- \*10 Color Repeat
- Brown
  - Red
  - Orange
  - Yellow
  - Green
  - Blue
  - Violet
  - Gray
  - White
  - Black

Inch [mm]			
Tolerance Unless Noted			
	.0	.00	.000
Inch	± .1	± .01	± .005

[ ] Dimensions for Reference only

## Ordering Information

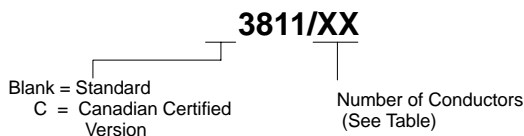

Note: Available in standard lengths of 100 feet or 300 feet per roll, please specify when ordering.

TS-0122-08  
Sheet 2 of 2

## 3M Interconnect Solutions Division

6801 River Place Blvd.  
Austin, TX 78726-9000

For technical, sales or ordering information call  
**800-225-5373**