

# Amber PLCC4 Surface Mount LED


with Domed Lens

查询"OVSAABLCR8"供应商



## OVSAABLCR8

- High intensity with low power consumption
- White PLCC4 package with clear domed lens
- Wide viewing angle
- Packaged in 8mm tape on 7" diameter reel
- Compatible with automatic placement equipment
- Compatible with infrared and vapor phase reflow solder process
- Amber (591nm)

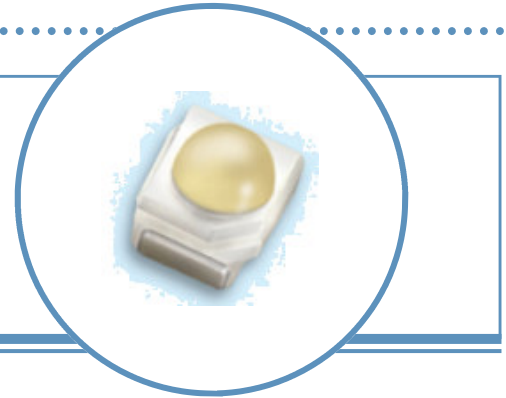


The **OVSAABLCR8** is designed for wide angle, uniform light output. Its internal reflector and colorless clear lens optimize luminous intensity and make it ideal for backlighting applications and for coupling with light guides.

### Applications

- Traffic lights
- Signal and symbol luminaire
- Mono-color indicators
- Backlighting (LCD, switches, displays, illuminated advertising)
- Interior automotive lighting (instrumentation clusters)
- Safety marker lights (steps, exit ways)

Part Number	Material	Emitted Color	Intensity Typ. mcd	Lens Color
OVSAABLCR8	AlInGaP	Amber	1650	Water Clear

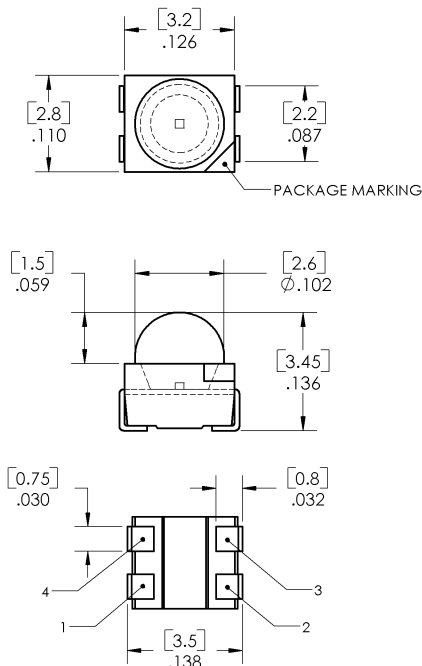

1, 2, 3 CATHODE 4 ANODE  
DIMENSIONS ARE IN INCHES AND (MILLIMETERS).



**RoHS** **Moisture**  
ATTENTION  
OBSERVE PRECAUTIONS  
ELECTROSTATIC  
SENSITIVE DEVICES

**DO NOT LOOK DIRECTLY  
AT LED WITH UNSHIELDED  
EYES OR DAMAGE TO  
RETINA MAY OCCUR.**

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

## Absolute Maximum Ratings

T<sub>A</sub> = 25° C unless otherwise noted

Storage Temperature Range	-40 ~ +100° C
Operating Temperature Range	-40 ~ +100° C
Soldering Temperature <sup>1</sup>	260° C
Reverse Voltage	5 V
Continuous Forward Current	70 mA
Peak Forward Current (10% Duty Cycle, PW ≤ 100 μsec)	200 mA
Power Dissipation	225 mW

Note:

- Solder time less than 5 seconds at temperature extreme.

## Electrical Characteristics


T<sub>A</sub> = 25° C unless otherwise noted

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
I <sub>V</sub>	Luminous Intensity	900	1650	----	mcd	I <sub>F</sub> = 50 mA
V <sub>F</sub>	Forward Voltage	----	2.6	3.2	V	I <sub>F</sub> = 50 mA
I <sub>R</sub>	Reverse Current	----	----	10	μA	V <sub>R</sub> = 5 V
λ <sub>D</sub>	Dominant Wavelength	----	591	----	nm	I <sub>F</sub> = 50 mA
λ <sub>P</sub>	Peak Wavelength	----	594	----	nm	I <sub>F</sub> = 50 mA
2 Θ <sub>1/2</sub>	50% Power Angle	----	60	----	deg	I <sub>F</sub> = 50 mA

## Standard Bins (I<sub>F</sub> = 50mA)

Lamps are sorted to luminous intensity (I<sub>V</sub>) and dominant wavelength (λ<sub>D</sub>) bins shown.

Orders for OVSAABLCR8 may be filled with any or all bins contained as below.

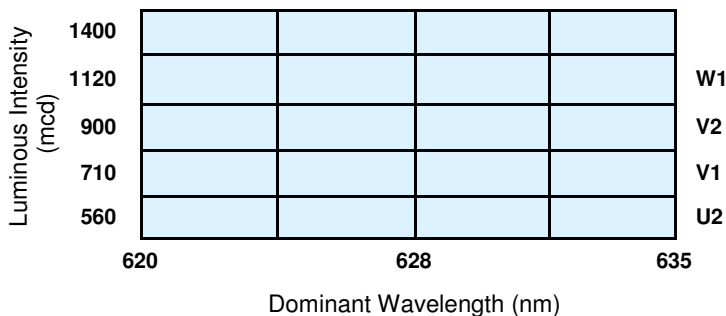


Luminous intensity is at U2 bin or above.

Notes:


- All ranks will be included per delivery, rank ratio will be based on the chip distribution.
- To designate luminous intensity ranks, please contact OPTEK.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


## Typical Electro-Optical Characteristics Curves

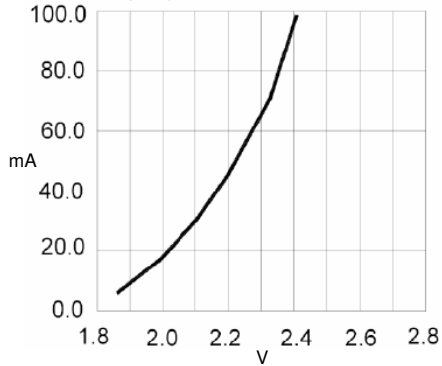


Forward Current vs Forward Voltage

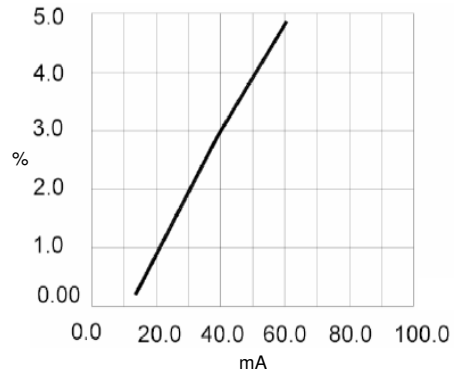


Relative Luminous Intensity vs Forward Current

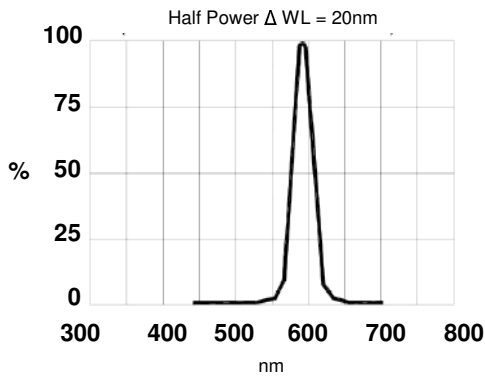


Relative Luminous Flux vs Wavelength

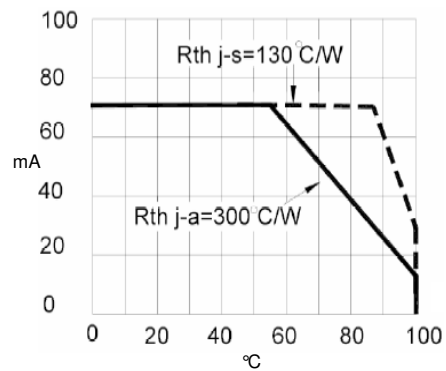

Maximum Forward DC Current vs Ambient Temperature

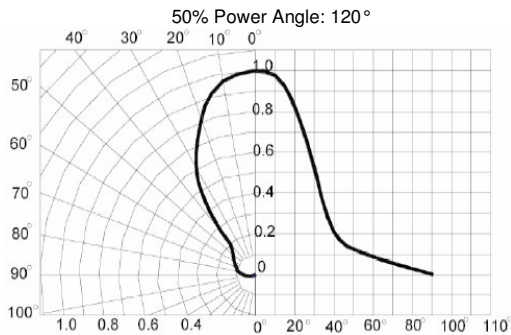

Spatial Distribution

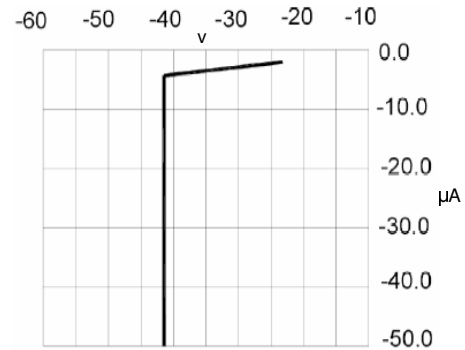


Reverse Current vs Reverse Voltage

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


# Amber PLCC4 SMD LED with Domed Lens

查询"OVSAABLCR8"供应商


## Reel Dimensions: 7-inch reel

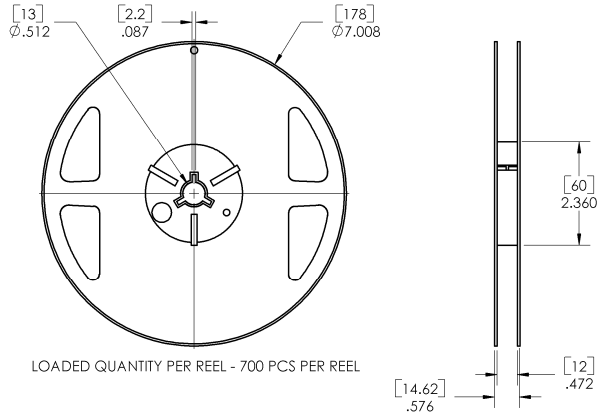

## Carrier Tape Dimensions: Loaded quantity 700 pieces per reel

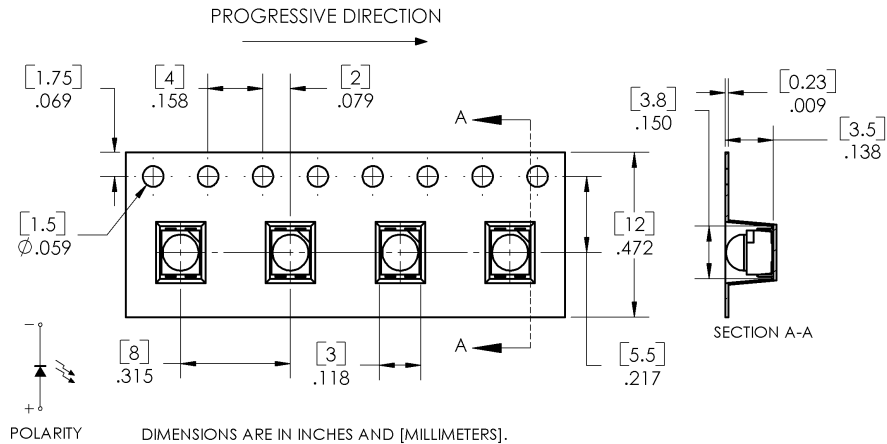

## Moisture Resistant Packaging

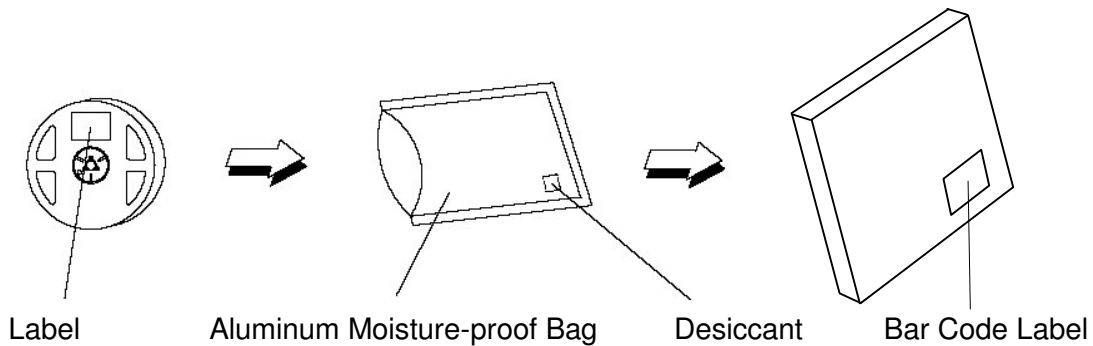

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.