


## TELUX™



### DESCRIPTION

The TELUX™ series is a clear, non diffused LED for applications where supreme luminous flux is required. It is designed in an industry standard 7.62 mm square package utilizing highly developed AlInGaP technology. The supreme heat dissipation of TELUX™ allows applications at high ambient temperatures. All packing units are binned for luminous flux, forward voltage and color to achieve the most homogenous light appearance in application. SAE and ECE color requirements for automobile application are available for color red.

### PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: TELUX
- Product series: power
- Angle of half intensity:  $\pm 45^\circ$

### FEATURES

- High luminous flux
- Supreme heat dissipation:  $R_{thJP}$  is 90 K/W
- High operating temperature:  
 $T_{amb} = -40^\circ\text{C}$  to  $+110^\circ\text{C}$
- Meets SAE and ECE color requirements for the automobile industry for color red
- Packed in tubes for automatic insertion
- Luminous flux, forward voltage and color categorized for each tube
- Small mechanical tolerances allow precise usage of external reflectors or lightguides
- Compatible with wave solder processes according to CECC 00802
- ESD-withstand voltage: up to 2 kV according to JESD22-A114-B
- AEC-Q101 qualified
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

AUTOMOTIVE  
GRADE



**RoHS**  
COMPLIANT  
**GREEN**  
[5-2008]\*\*

### APPLICATIONS

- Exterior lighting
- Dashboard illumination
- Tail-, stop- and turn signals of motor vehicles
- Replaces small incandescent lamps
- Traffic signals and signs

### PARTS TABLE

| PART     | COLOR  | LUMINOUS FLUX<br>(mlm) |      |      | at $I_F$<br>(mA) | WAVELENGTH<br>(nm) |      |      | FORWARD VOLTAGE<br>(V) |      |      | TECHNOLOGY      |
|----------|--------|------------------------|------|------|------------------|--------------------|------|------|------------------------|------|------|-----------------|
|          |        | MIN.                   | TYP. | MAX. |                  | MIN.               | TYP. | MAX. | MIN.                   | TYP. | MAX. |                 |
| TLWR8900 | Red    | 2000                   | 3000 | -    | 70               | 611                | 615  | 634  | 1.83                   | 2.2  | 2.67 | AlInGaP on GaAs |
| TLWR8901 | Red    | 2000                   | 3000 | 4800 | 70               | 611                | 615  | 634  | 1.83                   | 2.2  | 2.67 | AlInGaP on GaAs |
| TLWR8902 | Red    | 3000                   | -    | 4800 | 70               | 611                | 615  | 634  | 1.95                   | 2.2  | 2.67 | AlInGaP on GaAs |
| TLWR8903 | Red    | 2500                   | -    | 4200 | 70               | 611                | 615  | 634  | 1.83                   | 2.2  | 2.67 | AlInGaP on GaAs |
| TLWY8900 | Yellow | 2000                   | 3000 | -    | 70               | 585                | 590  | 597  | 1.83                   | 2.1  | 2.67 | AlInGaP on GaAs |

### ABSOLUTE MAXIMUM RATINGS ( $T_{amb} = 25^\circ\text{C}$ , unless otherwise specified) TLWR8900, TLWR8901, TLWR8902, TLWR8903, TLWY8900

| PARAMETER                           | TEST CONDITION                                                                               | SYMBOL     | VALUE       | UNIT             |
|-------------------------------------|----------------------------------------------------------------------------------------------|------------|-------------|------------------|
| Reverse voltage <sup>(1)</sup>      | $I_R = 100 \mu\text{A}$                                                                      | $V_R$      | 10          | V                |
| DC forward current                  | $T_{amb} \leq 85^\circ\text{C}$                                                              | $I_F$      | 70          | mA               |
| Surge forward current               | $t_p \leq 10 \mu\text{s}$                                                                    | $I_{FSM}$  | 1           | A                |
| Power dissipation                   |                                                                                              | $P_V$      | 187         | mW               |
| Junction temperature                |                                                                                              | $T_j$      | 125         | $^\circ\text{C}$ |
| Operating temperature range         |                                                                                              | $T_{amb}$  | -40 to +110 | $^\circ\text{C}$ |
| Storage temperature range           |                                                                                              | $T_{stg}$  | -55 to +110 | $^\circ\text{C}$ |
| Soldering temperature               | $t \leq 5 \text{ s}$ , 1.5 mm from body preheat temperature $100^\circ\text{C}/30 \text{ s}$ | $T_{sd}$   | 260         | $^\circ\text{C}$ |
| Thermal resistance junction/ambient | With cathode heatsink of $70 \text{ mm}^2$                                                   | $R_{thJA}$ | 200         | K/W              |
| Thermal resistance junction/pin     |                                                                                              | $R_{thJP}$ | 90          | K/W              |

#### Note

<sup>(1)</sup> Driving the LED in reverse direction is suitable for a short term application

\*\* Please see document "Vishay Material Category Policy": [www.vishay.com/doc?99902](http://www.vishay.com/doc?99902)

## OPTICAL AND ELECTRICAL CHARACTERISTICS ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) TLWR8900, TLWR8901, TLWR8902, TLWR8903, RED

| PARAMETER                     | TEST CONDITION                                     | PART     | SYMBOL           | MIN. | TYP.     | MAX. | UNIT    |
|-------------------------------|----------------------------------------------------|----------|------------------|------|----------|------|---------|
| Total flux                    | $I_F = 70\text{ mA}$ , $R_{thJA} = 200\text{ K/W}$ | TLWR8900 | $\phi_V$         | 2000 | 3000     | -    | mlm     |
|                               |                                                    | TLWR8901 | $\phi_V$         | 2000 | 3000     | 4800 | mlm     |
|                               |                                                    | TLWR8902 | $\phi_V$         | 3000 | -        | 4800 | mlm     |
|                               |                                                    | TLWR8903 | $\phi_V$         | 2500 | -        | 4200 | mlm     |
| Luminous intensity/total flux | $I_F = 70\text{ mA}$ , $R_{thJA} = 200\text{ K/W}$ |          | $I_V/\phi_V$     | -    | 0.7      | -    | mcd/mlm |
| Dominant wavelength           |                                                    |          | $\lambda_d$      | 611  | 615      | 634  | nm      |
| Peak wavelength               |                                                    |          | $\lambda_p$      | -    | 624      | -    | nm      |
| Angle of half intensity       |                                                    |          | $\varphi$        | -    | $\pm 45$ | -    | deg     |
| Total included angle          | 90 % of total flux captured                        |          | $\varphi_{0.9V}$ | -    | 100      | -    | deg     |
| Forward voltage               | $I_F = 70\text{ mA}$ , $R_{thJA} = 200\text{ K/W}$ | TLWR8900 | $V_F$            | 1.83 | 2.2      | 2.67 | V       |
|                               |                                                    | TLWR8901 | $V_F$            | 1.83 | 2.2      | 2.67 | V       |
|                               |                                                    | TLWR8902 | $V_F$            | 1.95 | 2.2      | 2.67 | V       |
|                               |                                                    | TLWR8903 | $V_F$            | 1.83 | 2.2      | 2.67 | V       |
| Reverse voltage               | $I_R = 10\text{ }\mu\text{A}$                      |          | $V_R$            | 10   | 20       | -    | V       |
| Junction capacitance          | $V_R = 0$ , $f = 1\text{ MHz}$                     |          | $C_j$            | -    | 17       | -    | pF      |

## OPTICAL AND ELECTRICAL CHARACTERISTICS ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) TLWY8900, YELLOW

| PARAMETER                     | TEST CONDITION                                     | PART | SYMBOL           | MIN. | TYP.     | MAX. | UNIT    |
|-------------------------------|----------------------------------------------------|------|------------------|------|----------|------|---------|
| Total flux                    | $I_F = 70\text{ mA}$ , $R_{thJA} = 200\text{ K/W}$ |      | $\phi_V$         | 2000 | 3000     | -    | mlm     |
| Luminous intensity/total flux |                                                    |      | $I_V/\phi_V$     | -    | 0.7      | -    | mcd/mlm |
| Dominant wavelength           |                                                    |      | $\lambda_d$      | 585  | 590      | 597  | nm      |
| Peak wavelength               |                                                    |      | $\lambda_p$      | -    | 594      | -    | nm      |
| Angle of half intensity       | $I_F = 70\text{ mA}$ , $R_{thJA} = 200\text{ K/W}$ |      | $\varphi$        | -    | $\pm 45$ | -    | deg     |
| Total included angle          |                                                    |      | $\varphi_{0.9V}$ | -    | 100      | -    | deg     |
| Forward voltage               |                                                    |      | $V_F$            | 1.83 | 2.1      | 2.67 | V       |
| Reverse voltage               |                                                    |      | $V_R$            | 10   | 15       | -    | V       |
| Junction capacitance          | $V_R = 0$ , $f = 1\text{ MHz}$                     |      | $C_j$            | -    | 17       | -    | pF      |

## LUMINOUS FLUX CLASSIFICATION

| GROUP | LUMINOUS FLUX (mlm) |        |
|-------|---------------------|--------|
|       | MIN.                | MAX.   |
| D     | 2000                | 3000   |
| E     | 2500                | 3600   |
| F     | 3000                | 4200   |
| G     | 3500                | 4800   |
| H     | 4000                | 6100   |
| I     | 5000                | 7300   |
| K     | 6000                | 9700   |
| L     | 7000                | 12 200 |
| M     | 8000                | 15 000 |

### Note

- Luminous flux is tested at a current pulse duration of 25 ms and an accuracy of  $\pm 11\%$ .  
These type numbers represent the order groups which include only a few brightness groups. Only one group will be shipped on each tube (there will be no mixing of two groups on each tube).

In order to ensure availability, single brightness groups will not be orderable.

In a similar manner for colors where wavelength groups are measured and binned, single wavelength groups will be shipped in any one tube.

In order to ensure availability, single wavelength groups will not be orderable.

| COLOR CLASSIFICATION |                      |      |      |      |
|----------------------|----------------------|------|------|------|
| GROUP                | DOM. WAVELENGTH (nm) |      |      |      |
|                      | YELLOW               |      | RED  |      |
|                      | MIN.                 | MAX. | MIN. | MAX. |
| 0                    | 585                  | 588  |      |      |
| 1                    | 587                  | 591  | 611  | 618  |
| 2                    | 589                  | 594  | 614  | 622  |
| 3                    | 592                  | 597  | 616  | 634  |

**Note**

- Wavelengths are tested at a current pulse duration of 25 ms and an accuracy of  $\pm 1$  nm.

| FORWARD VOLTAGE CLASSIFICATION |                     |      |
|--------------------------------|---------------------|------|
| GROUP                          | FORWARD VOLTAGE (V) |      |
|                                | MIN.                | MAX. |
| Y                              | 1.83                | 2.07 |
| Z                              | 1.95                | 2.19 |
| 0                              | 2.07                | 2.31 |
| 1                              | 2.19                | 2.43 |
| 2                              | 2.31                | 2.55 |
| 3                              | 2.43                | 2.67 |

**TYPICAL CHARACTERISTICS** ( $T_{amb} = 25^\circ\text{C}$ , unless otherwise specified)

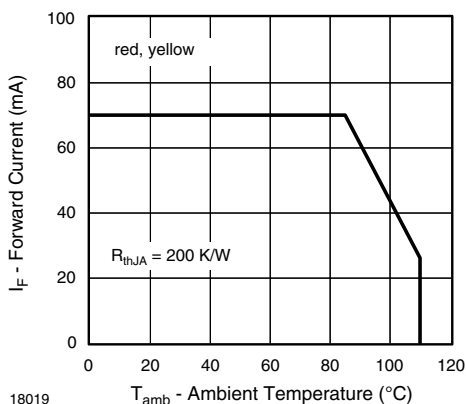


Fig. 1 - Forward Current vs. Ambient Temperature

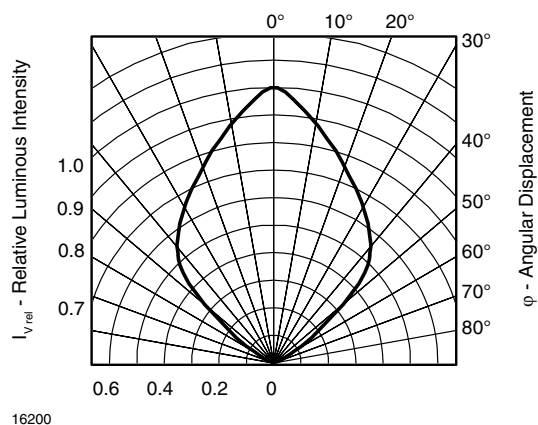


Fig. 3 - Rel. Luminous Intensity vs. Angular Displacement

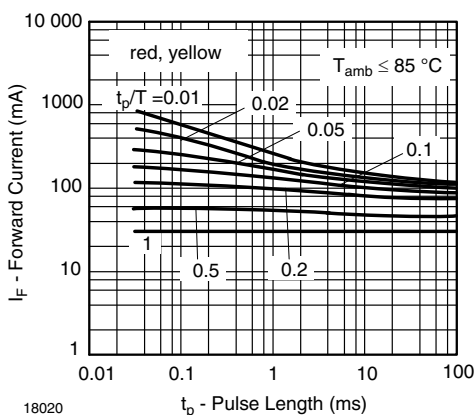


Fig. 2 - Forward Current vs. Pulse Length

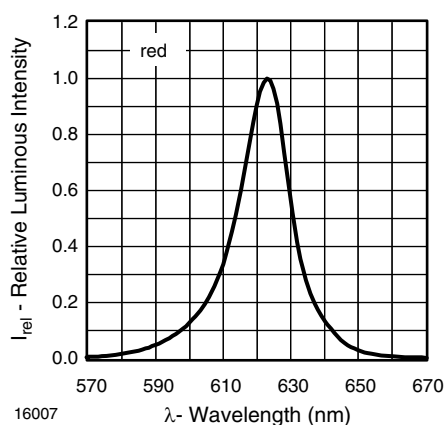


Fig. 4 - Relative Intensity vs. Wavelength

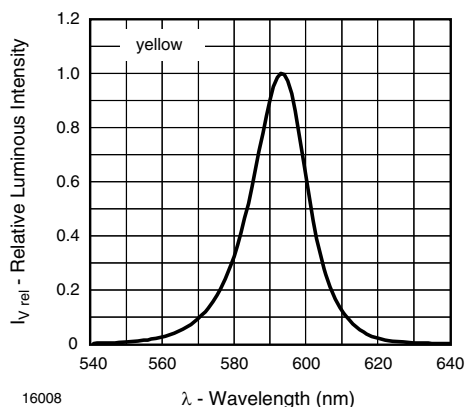


Fig. 5 - Relative Intensity vs. Wavelength

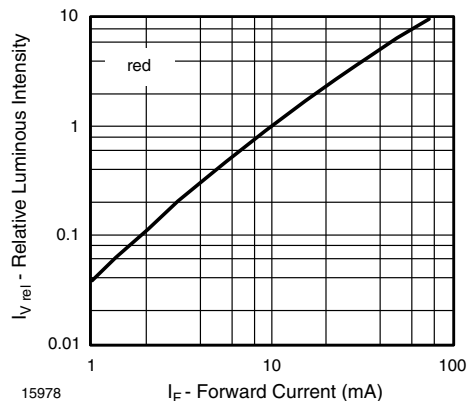


Fig. 8 - Relative Luminous Flux vs. Forward Current

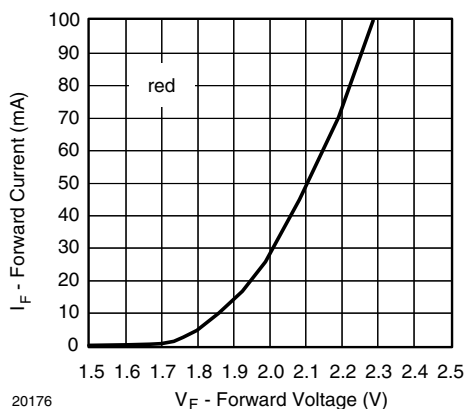


Fig. 6 - Forward Current vs. Forward Voltage

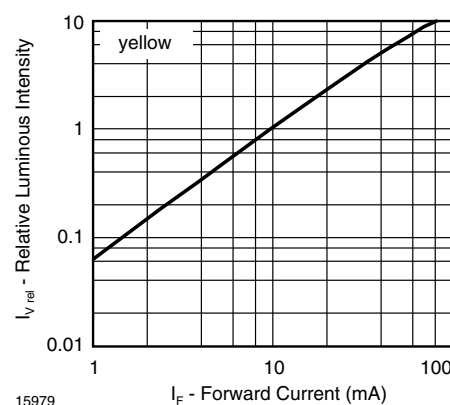


Fig. 9 - Relative Luminous Flux vs. Forward Current

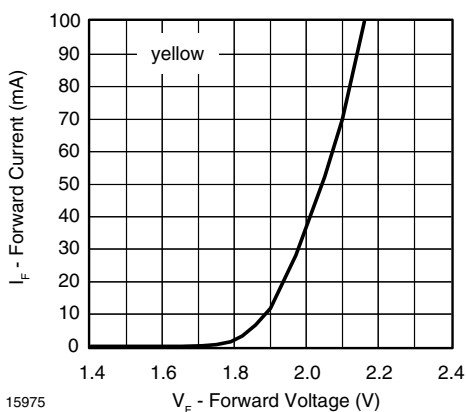


Fig. 7 - Forward Current vs. Forward Voltage

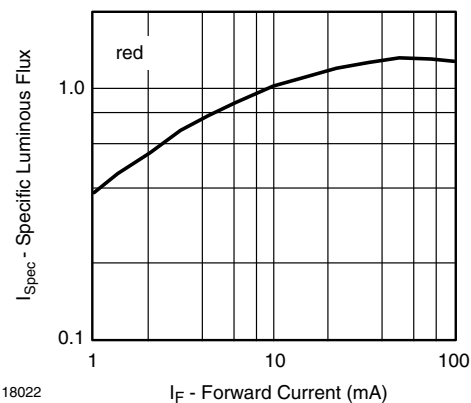


Fig. 10 - Specific Luminous Flux vs. Forward Current

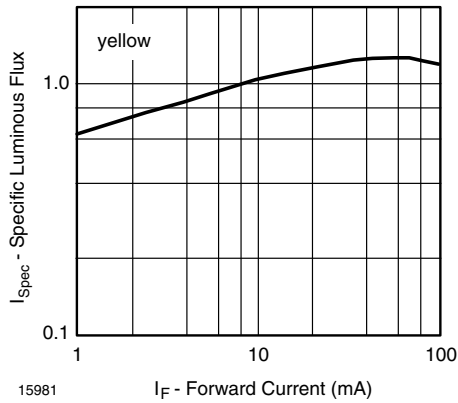


Fig. 11 - Specific Luminous Flux vs. Forward Current

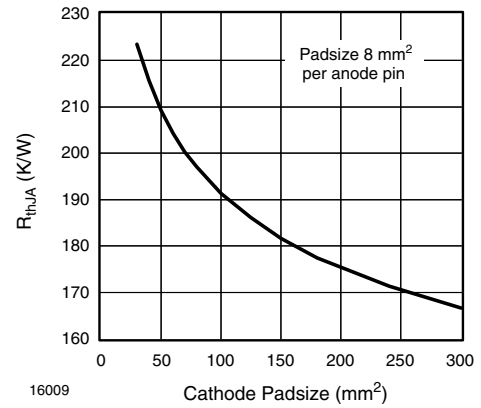


Fig. 14 - Thermal Resistance Junction Ambient vs. Cathode Padsize

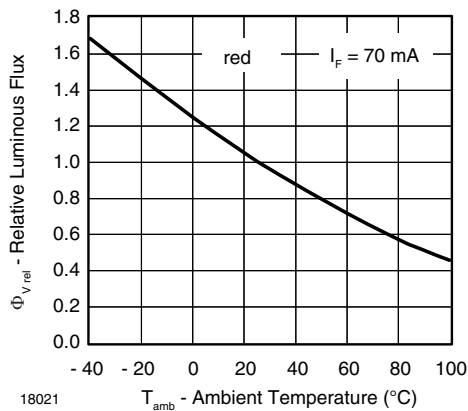


Fig. 12 - Rel. Luminous Flux vs. Ambient Temperature

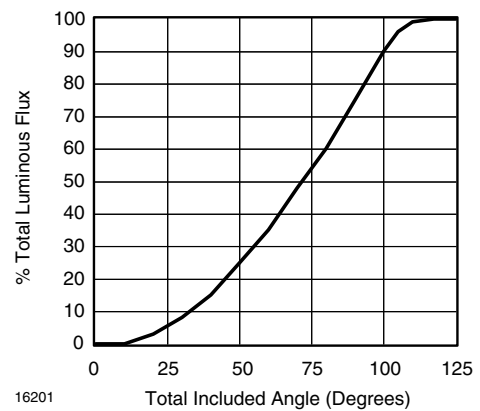


Fig. 15 - Percentage Total Luminous Flux vs. Total Included Angle for 90° Emission Angle



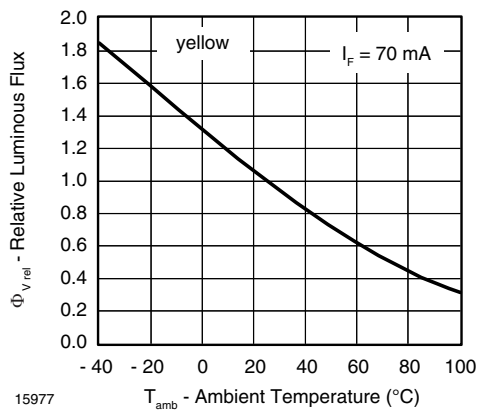


Fig. 13 - Rel. Luminous Flux vs. Ambient Temperature


## PACKAGE DIMENSIONS in millimeters

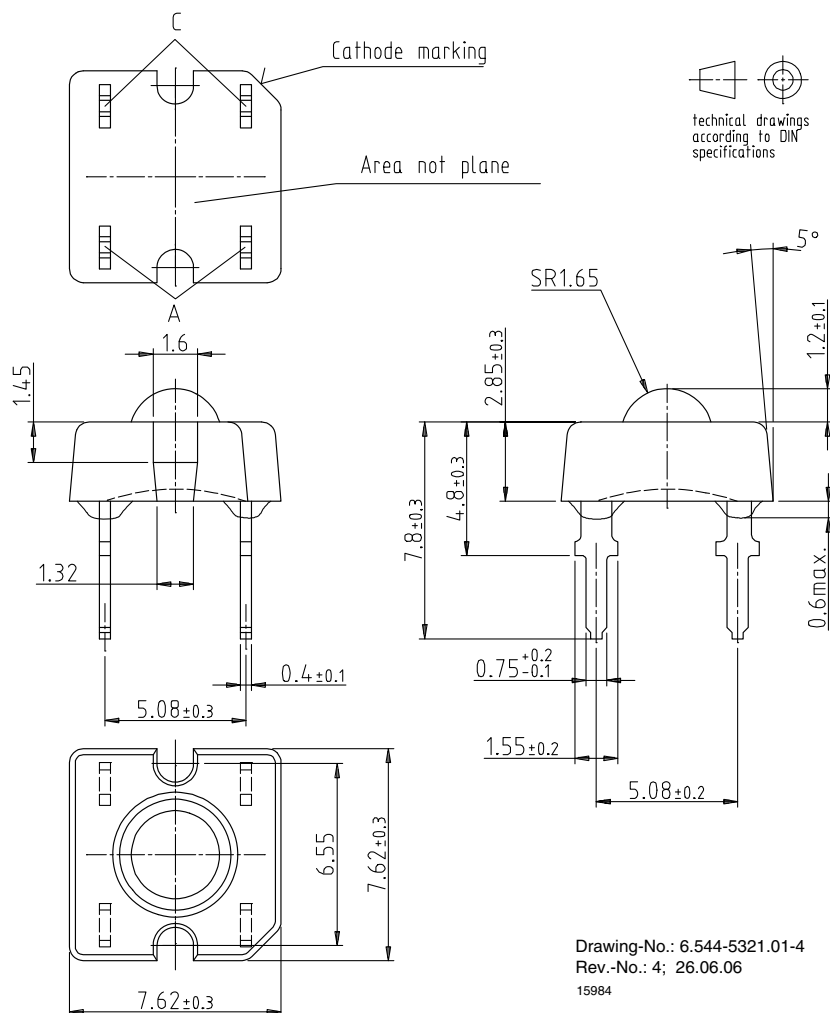

## FAN FOLD BOX DIMENSIONS in millimeters

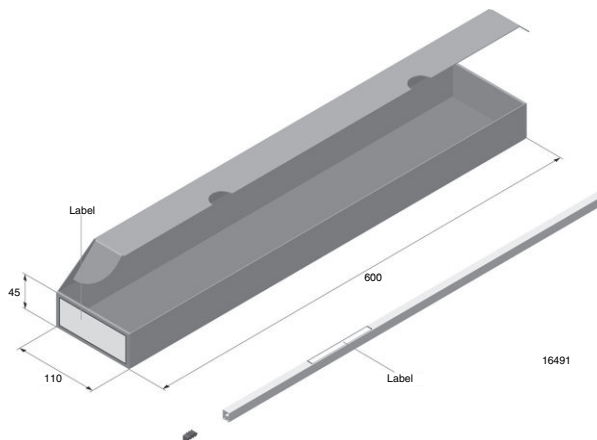


**LABEL OF FAN FOLD BOX (EXAMPLE)**

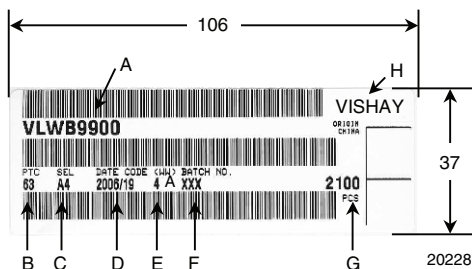

- A. Type of component
- B. Manufacturing plant
- C. SEL - selection code (bin):  
e.g.: A = code for luminous intensity group  
4 = code for color group
- D. Date code year/week
- E. Day code (e.g. 4: Thursday, A: early shift)
- F. Batch no.
- G. Total quantity
- H. Company code

**EXAMPLE FOR TELUX TUBE LABEL DIMENSIONS** in millimeters

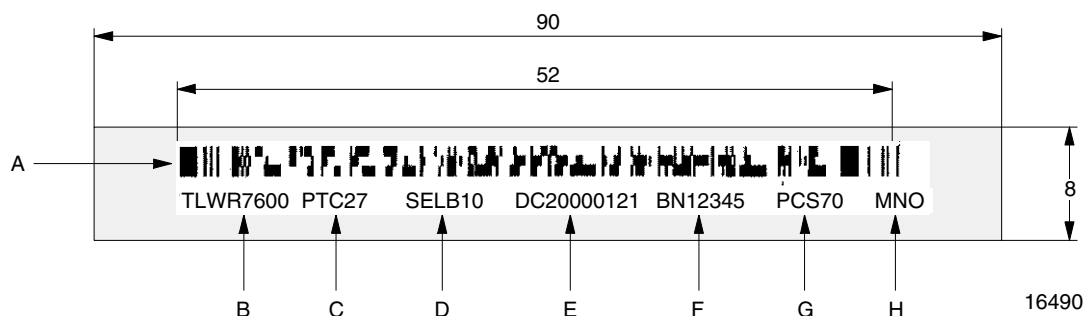

- A. Bar code
- B. Type of component
- C. Manufacturing plant
- D. SEL - selection code (bin):  
digit 1 - code for luminous flux group  
digit 2 - code for dominant wavelength group  
digit 3 - code for forward voltage group
- E. Date code
- F. Batch no.
- G. Total quantity
- H. Company code

## TUBE WITH BAR CODE LABEL DIMENSIONS in millimeters

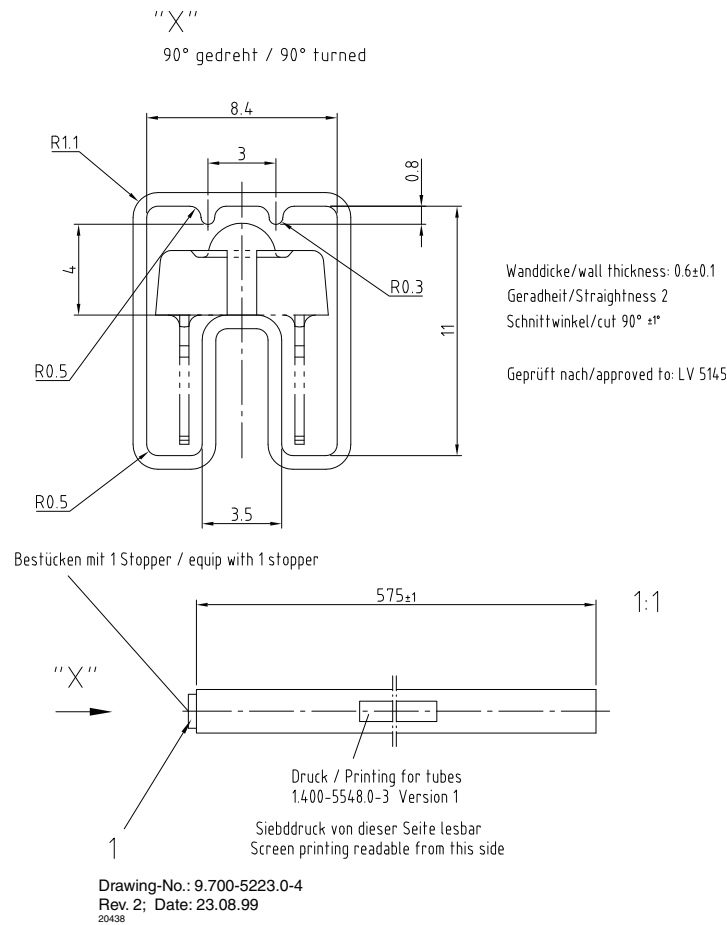


Fig. 16 - Drawing Proportions not Scaled



## **Disclaimer**

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.