

ZMM1B...ZMM75B


[查询"ZMM1B"供应商](#)

Silicon Epitaxial Planar Zener Diodes

In MiniMELF case especially for automatic insertion.

These diodes are also available in DO-35 case with the type designation BZX55B...

LL-34

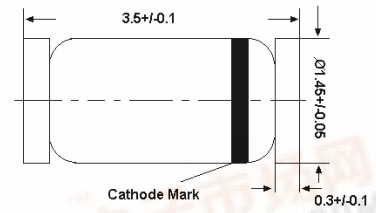

Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 175	$^\circ\text{C}$

¹⁾ Valid provided that electrodes are kept at ambient temperature

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	$R_{\theta\text{JA}}$	0.3 ¹⁾	K/mW
Forward Voltage at $I_F = 100\text{ mA}$	V_F	1	V


¹⁾ Valid provided that electrodes are kept at ambient temperature

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 30/06/2010 Rev: 02



ZMM1B...ZMM75B


[查询"ZMM1B"供应商](#)

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Type	Zener Voltage Range ¹⁾			Dynamic Resistance			Reverse Leakage Current			Temp coefficient of Zener Voltage TKvz (%/K)
	V_{Znom}	V_{ZT}	at I_{ZT}	Z_{ZT}	Z_{ZK}	at I_{ZK}	$T_a = 25\text{ }^\circ\text{C}$	$T_a = 125\text{ }^\circ\text{C}$	at V_R	
	(V)	(V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	Max. (μA)	(V)	
ZMM1B ²⁾	0.75	0.73...0.77	5	8	50	1	-	-	-	-0.26...-0.23
ZMM2B0	2	1.96...2.04	5	85	600	1	100	200	1	-0.09...-0.06
ZMM2B2	2.2	2.16...2.24	5	85	600	1	75	160	1	-0.09...-0.06
ZMM2B4	2.4	2.35...2.45	5	85	600	1	50	100	1	-0.09...-0.06
ZMM2B7	2.7	2.65...2.75	5	85	600	1	10	50	1	-0.09...-0.06
ZMM3B0	3	2.94...3.06	5	85	600	1	4	40	1	-0.08...-0.05
ZMM3B3	3.3	3.23...3.37	5	85	600	1	2	40	1	-0.08...-0.05
ZMM3B6	3.6	3.53...3.67	5	85	600	1	2	40	1	-0.08...-0.05
ZMM3B9	3.9	3.82...3.98	5	85	600	1	2	40	1	-0.08...-0.05
ZMM4B3	4.3	4.21...4.39	5	75	600	1	1	20	1	-0.06...-0.03
ZMM4B7	4.7	4.61...4.79	5	60	600	1	0.5	10	1	-0.05...+0.02
ZMM5B1	5.1	5...5.2	5	35	550	1	0.1	2	1	-0.02...+0.02
ZMM5B6	5.6	5.49...5.71	5	25	450	1	0.1	2	1	-0.05...+0.05
ZMM6B2	6.2	6.08...6.32	5	10	200	1	0.1	2	2	0.03...0.06
ZMM6B8	6.8	6.66...6.94	5	8	150	1	0.1	2	3	0.03...0.07
ZMM7B5	7.5	7.35...7.65	5	7	50	1	0.1	2	5	0.03...0.07
ZMM8B2	8.2	8.04...8.36	5	7	50	1	0.1	2	6.2	0.03...0.08
ZMM9B1	9.1	8.92...9.28	5	10	50	1	0.1	2	6.8	0.03...0.09
ZMM10B	10	9.8...10.2	5	15	70	1	0.1	2	7.5	0.03...0.1
ZMM11B	11	10.78...11.22	5	20	70	1	0.1	2	8.2	0.03...0.11
ZMM12B	12	11.76...12.24	5	20	90	1	0.1	2	9.1	0.03...0.11
ZMM13B	13	12.74...13.26	5	26	110	1	0.1	2	10	0.03...0.11
ZMM15B	15	14.7...15.3	5	30	110	1	0.1	2	11	0.03...0.11
ZMM16B	16	15.68...16.32	5	40	170	1	0.1	2	12	0.03...0.11
ZMM18B	18	17.64...18.36	5	50	170	1	0.1	2	13	0.03...0.11
ZMM20B	20	19.6...20.4	5	55	220	1	0.1	2	15	0.03...0.11
ZMM22B	22	21.56...22.44	5	55	220	1	0.1	2	16	0.04...0.12
ZMM24B	24	23.52...24.48	5	80	220	1	0.1	2	18	0.04...0.12
ZMM27B	27	26.46...27.54	5	80	220	1	0.1	2	20	0.04...0.12
ZMM30B	30	29.4...30.6	5	80	220	1	0.1	2	22	0.04...0.12
ZMM33B	33	32.34...33.66	5	80	220	1	0.1	2	24	0.04...0.12
ZMM36B	36	35.28...36.72	5	80	220	1	0.1	2	27	0.04...0.12
ZMM39B	39	38.22...39.78	2.5	90	500	0.5	0.1	5	30	0.04...0.12
ZMM43B	43	42.14...43.86	2.5	90	500	0.5	0.1	5	33	0.04...0.12
ZMM47B	47	46.06...47.94	2.5	110	600	0.5	0.1	5	36	0.04...0.12
ZMM51B	51	49.98...52.02	2.5	125	700	0.5	0.1	10	39	0.04...0.12
ZMM56B	56	54.88...57.12	2.5	135	700	0.5	0.1	10	43	0.04...0.12
ZMM62B	62	60.76...63.24	2.5	150	1000	0.5	0.1	10	47	0.04...0.12
ZMM68B	68	66.64...69.36	2.5	200	1000	0.5	0.1	10	51	0.04...0.12
ZMM75B	75	73.5...76.5	2.5	250	1000	0.5	0.1	10	56	0.04...0.12


¹⁾ Tested with pulses $t_p = 20\text{ ms}$.

²⁾ The ZMM1B is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode electrode to the negative pole.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 18949 : 2002
Certificate No. 05103

ISO 14001 : 2004
Certificate No. 7116




ISO 9001 : 2008
Certificate No. 0508098

BS-OHSAS 18001 : 2007
Certificate No. 7116

IECQ QC 080000
Certificate No. 0508098

ZMM1B...ZMM75B

[查询"ZMM1B"供应商](#)

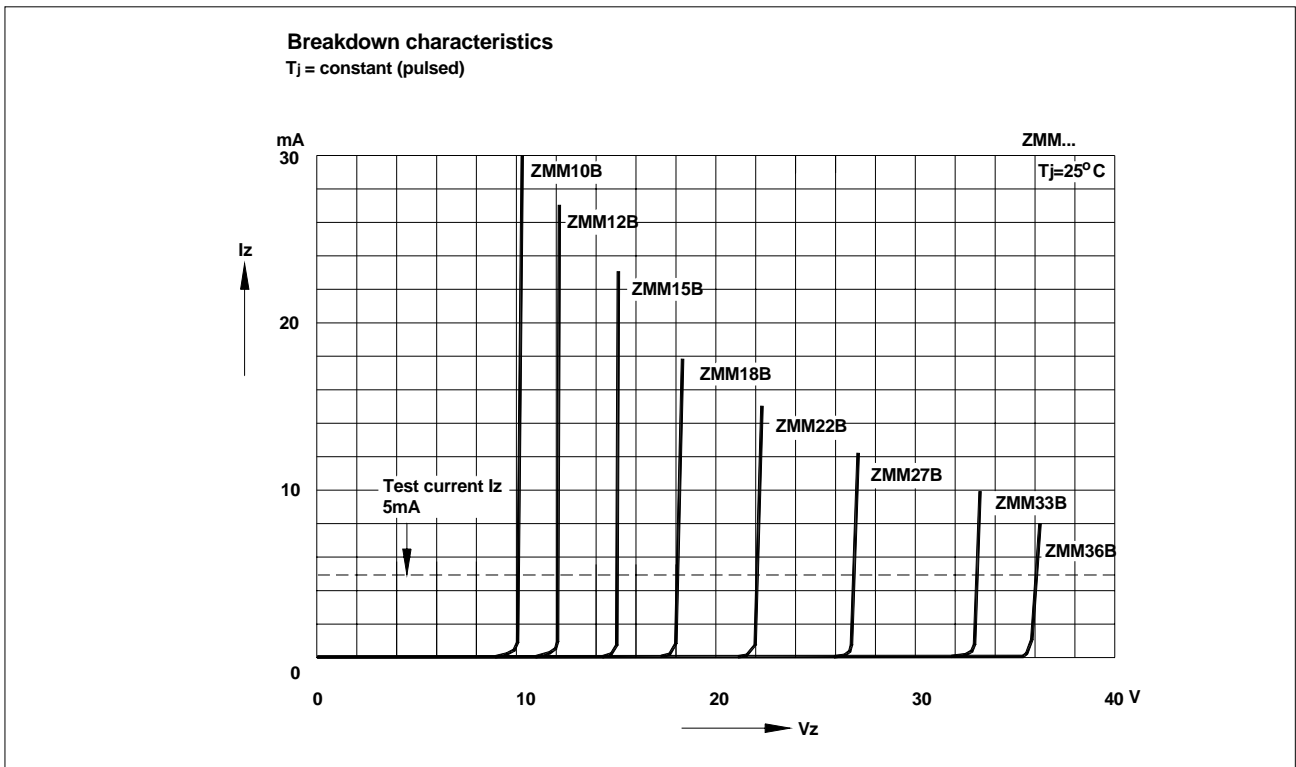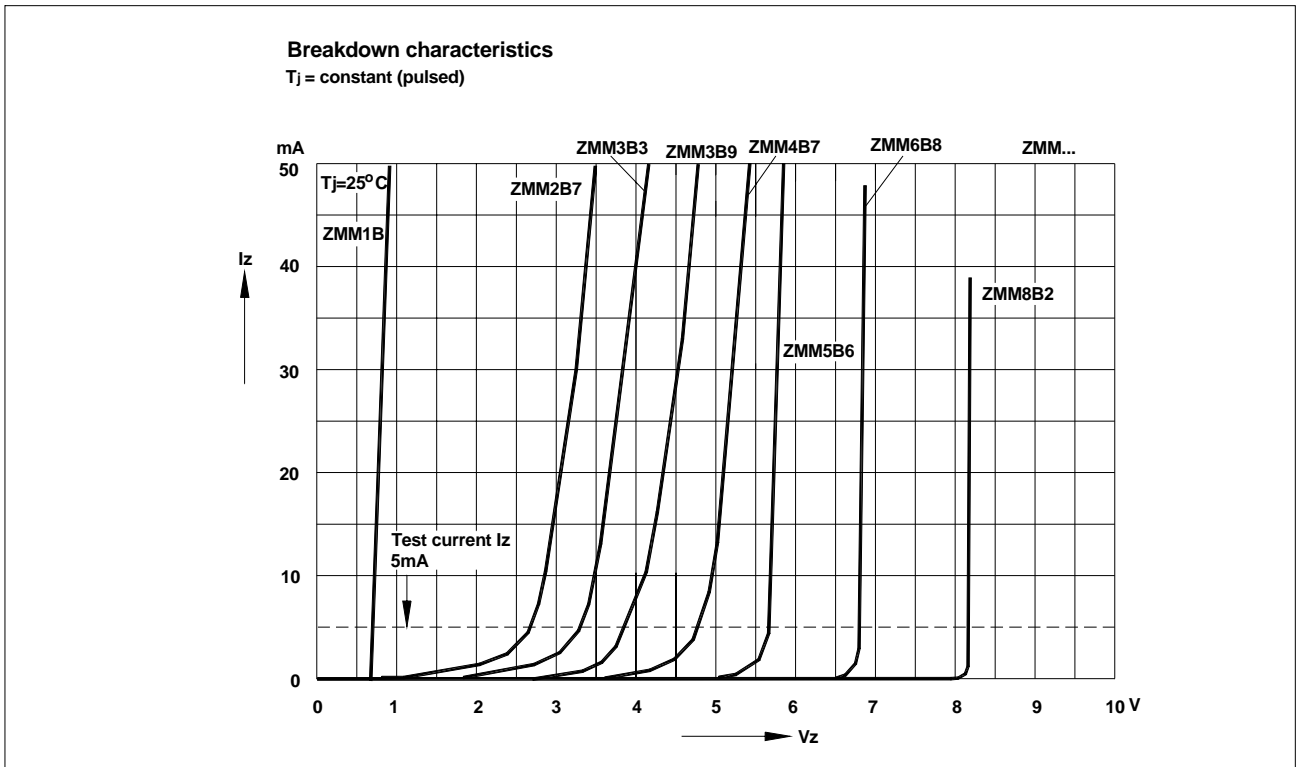

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 18849 : 2002
Certificate No. 05103



ISO14001 : 2004
Certificate No. 7116



ISO 9001 : 2008
Certificate No. 0508098







BS-OHSAS 18001 : 2007
Certificate No. 7116



IECQ QC 080000
Certificate No. 05103

ZMM1B...ZMM75B

[查询"ZMM1B"供应商](#)



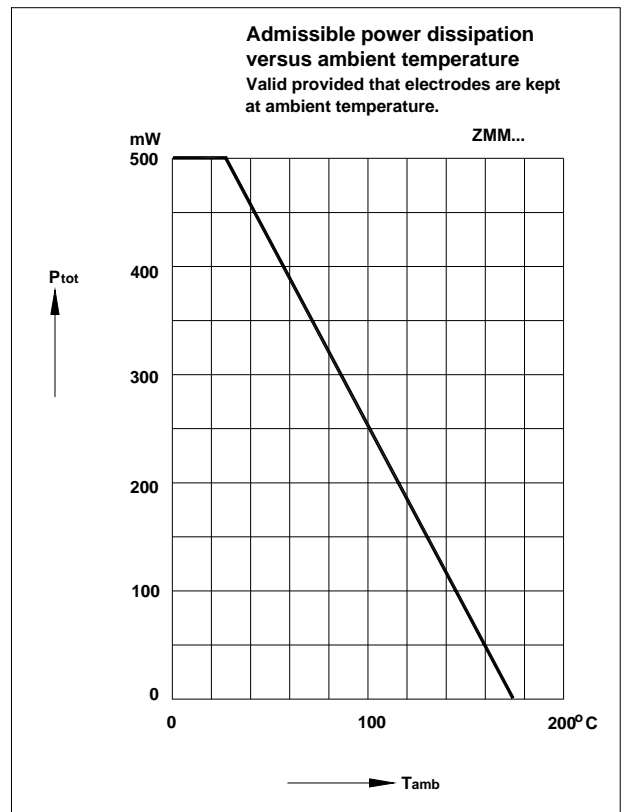
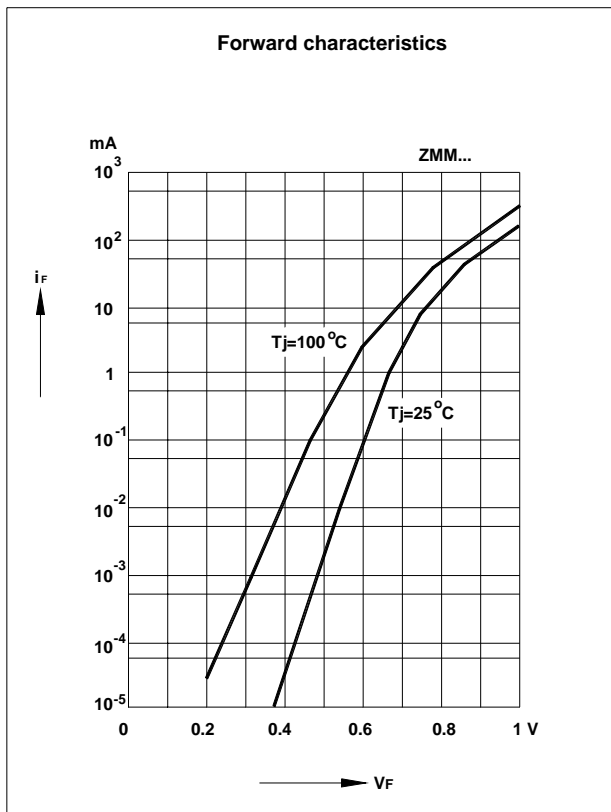
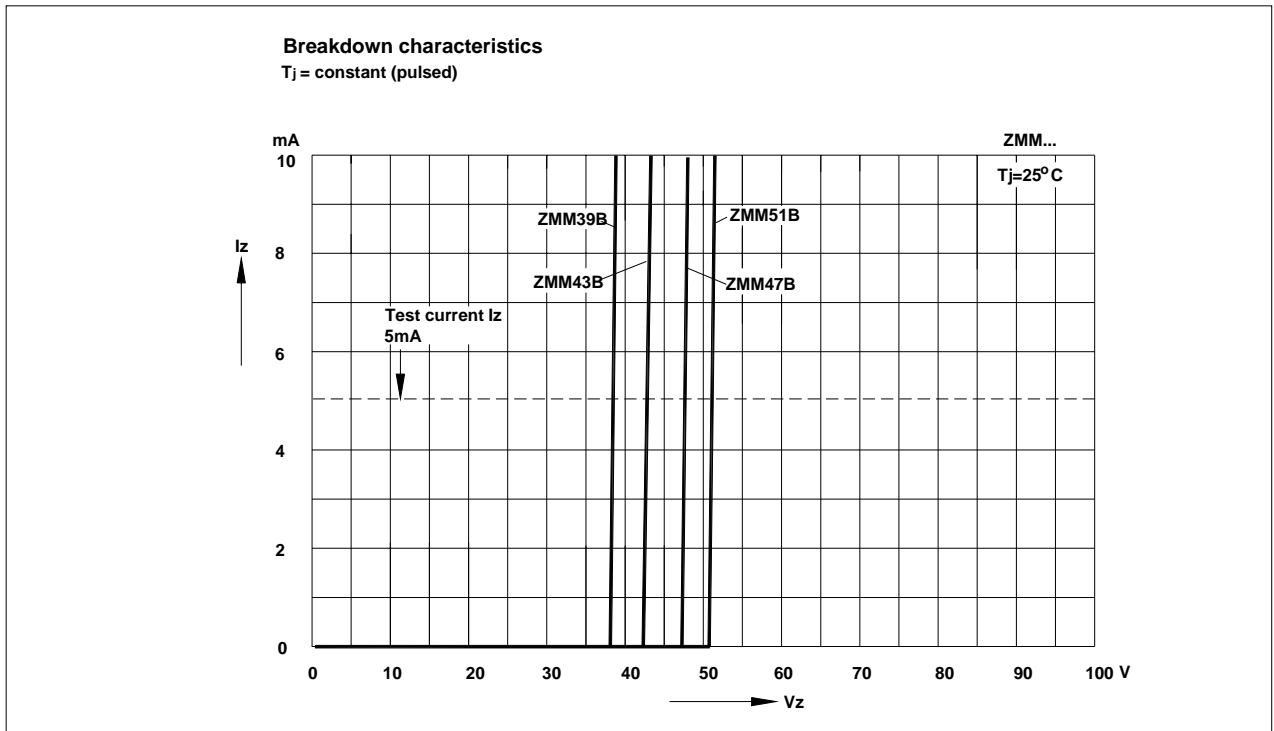


SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ZMM1B...ZMM75B

[查询"ZMM1B"供应商](#)

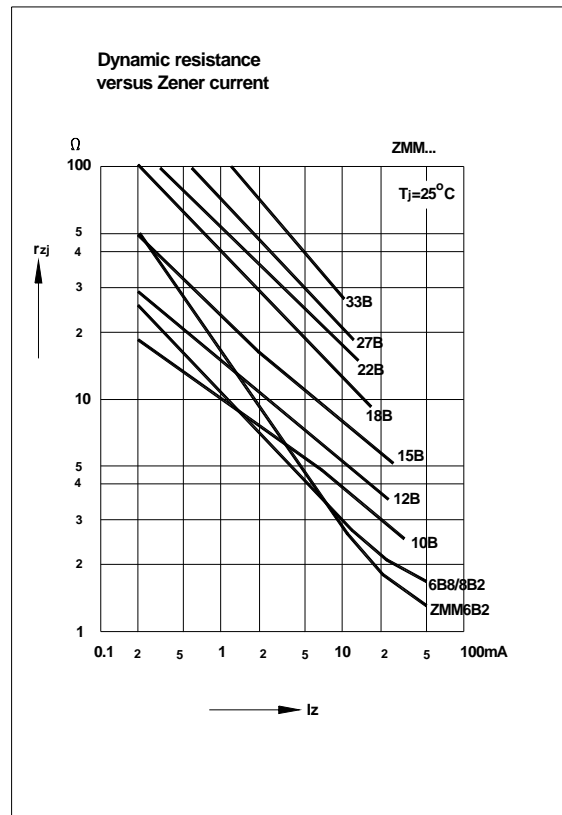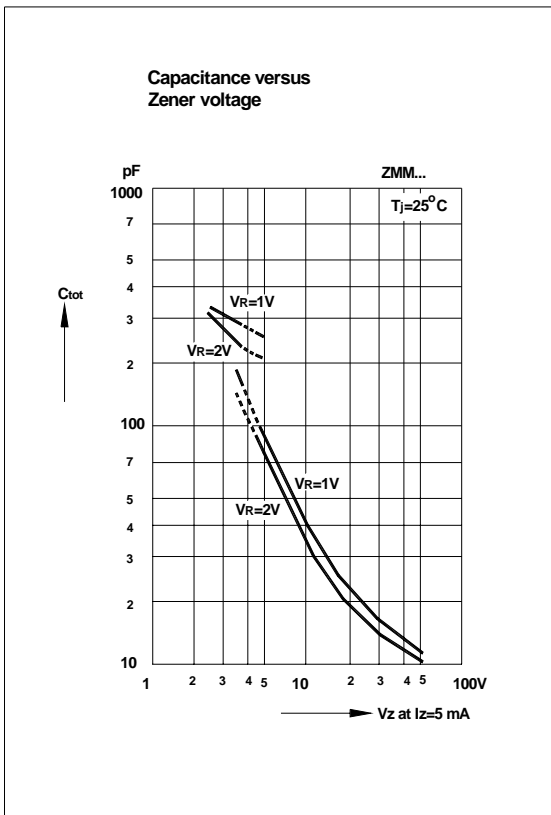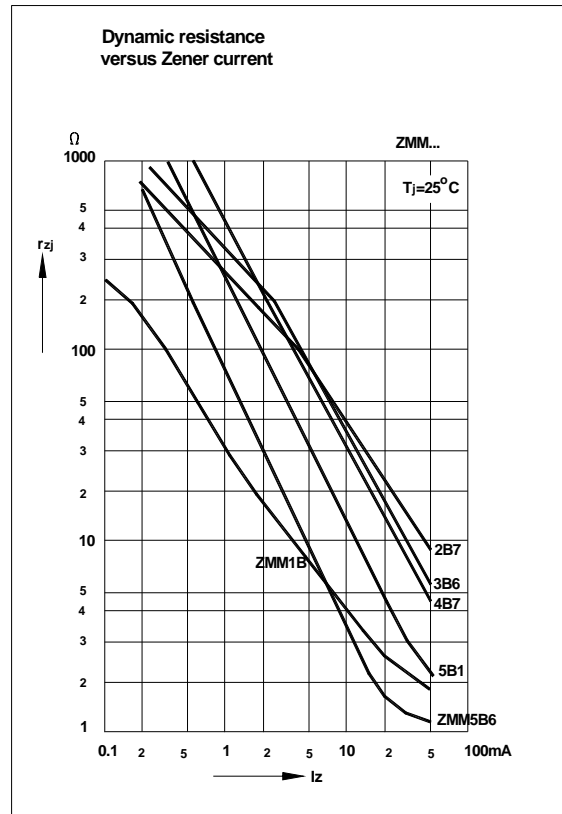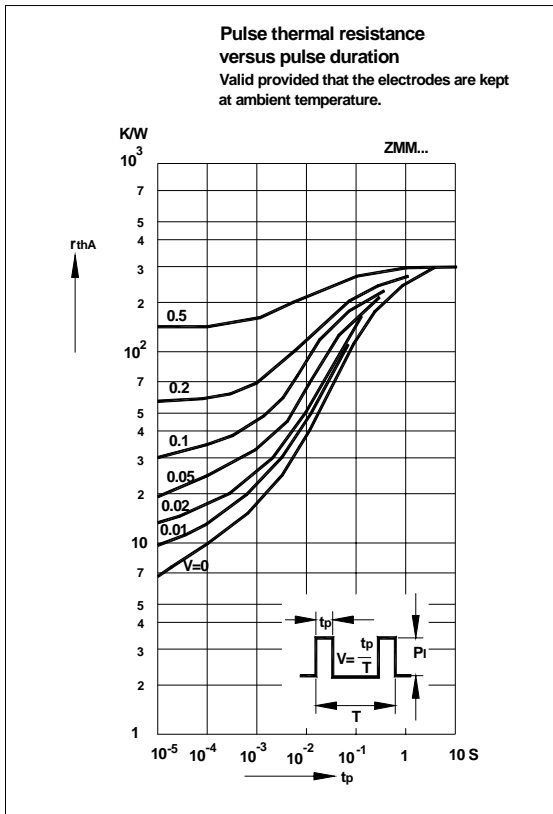






SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ZMM1B...ZMM75B

[查询"ZMM1B"供应商](#)


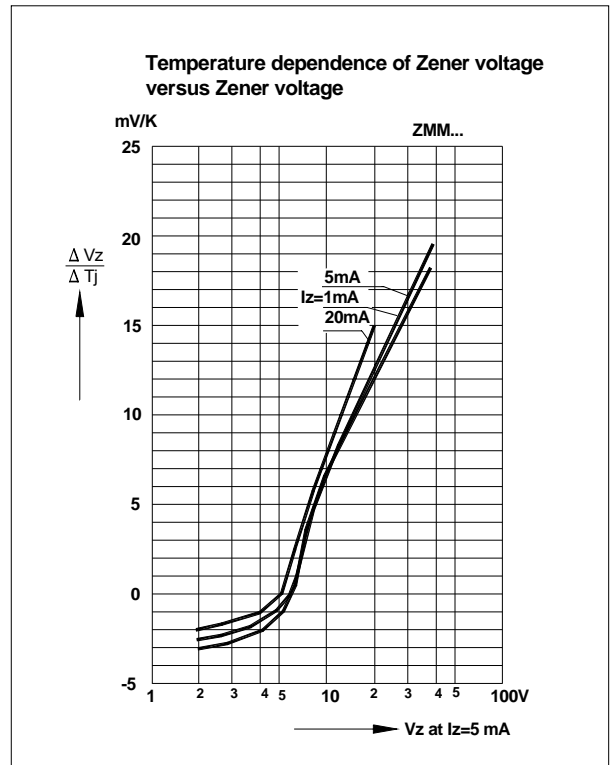
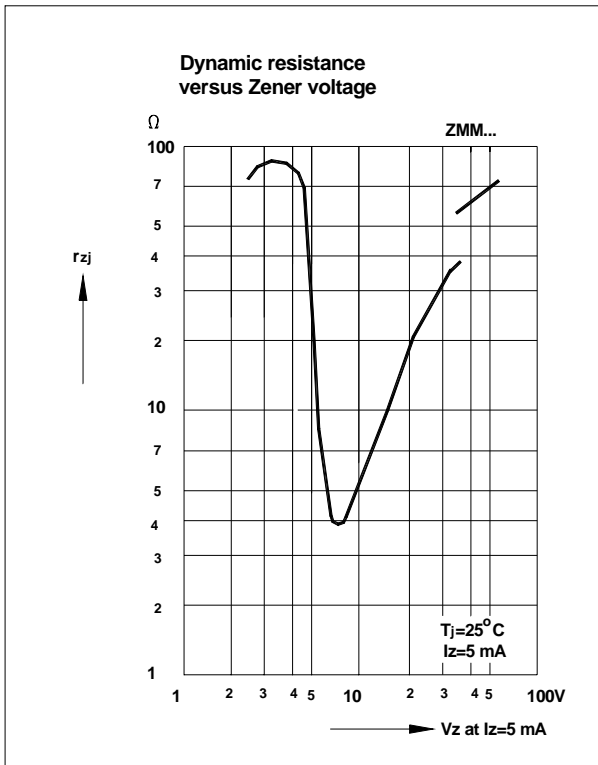
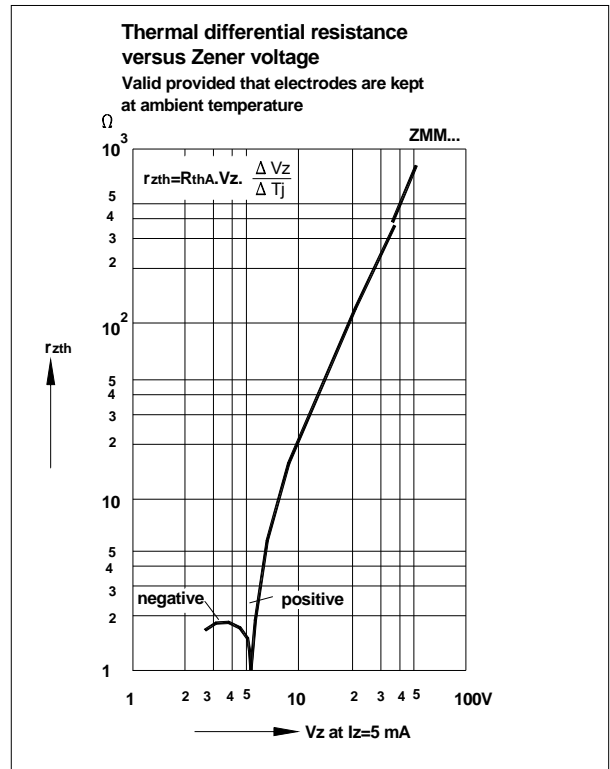
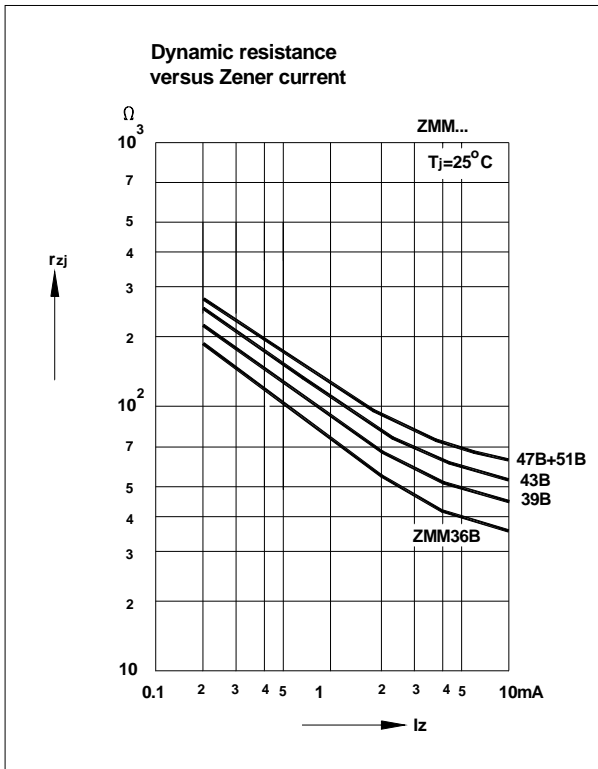


SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ZMM1B...ZMM75B

[查询"ZMM1B"供应商](#)

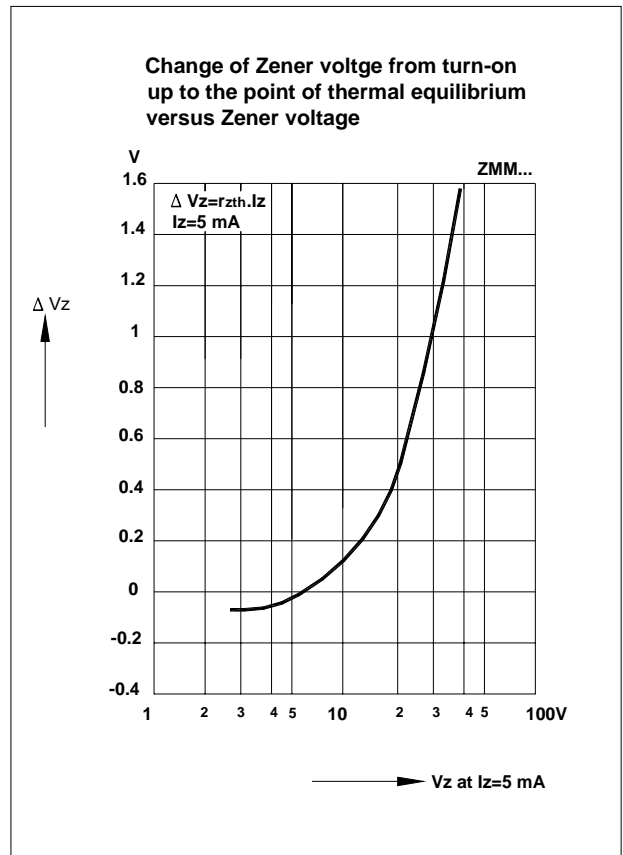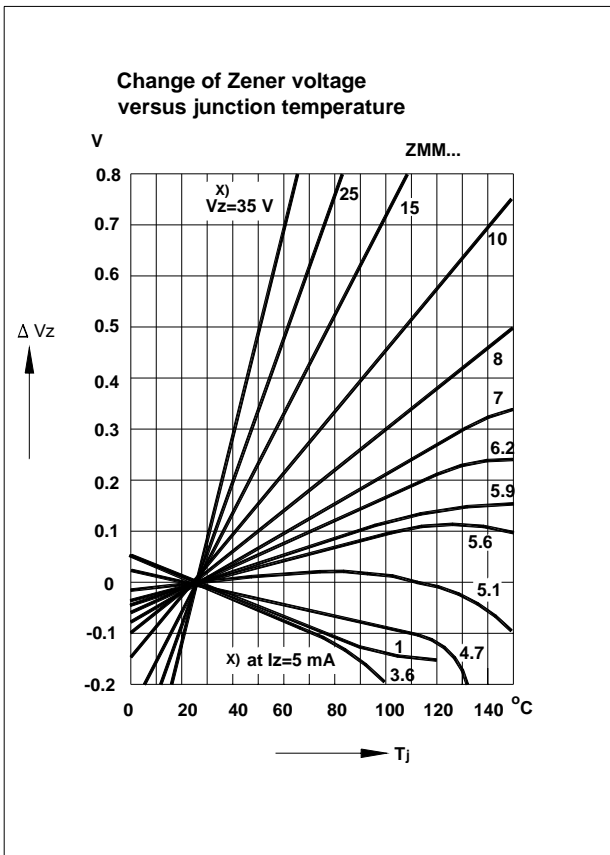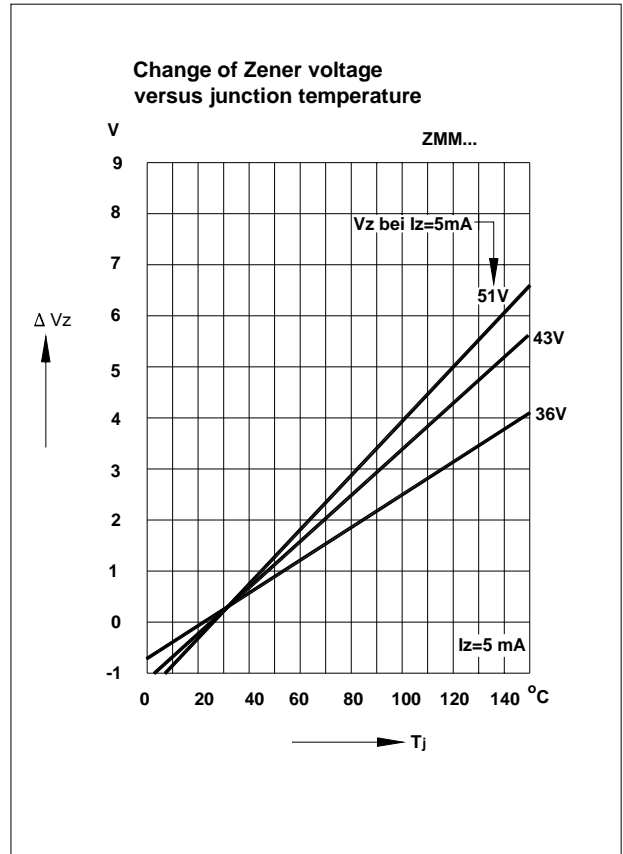
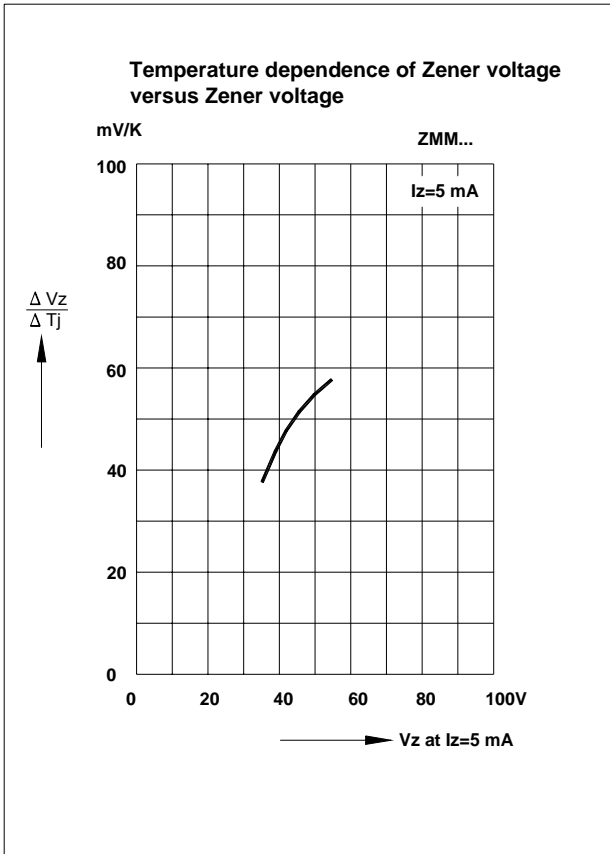


SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ZMM1B...ZMM75B

[查询"ZMM1B"供应商](#)

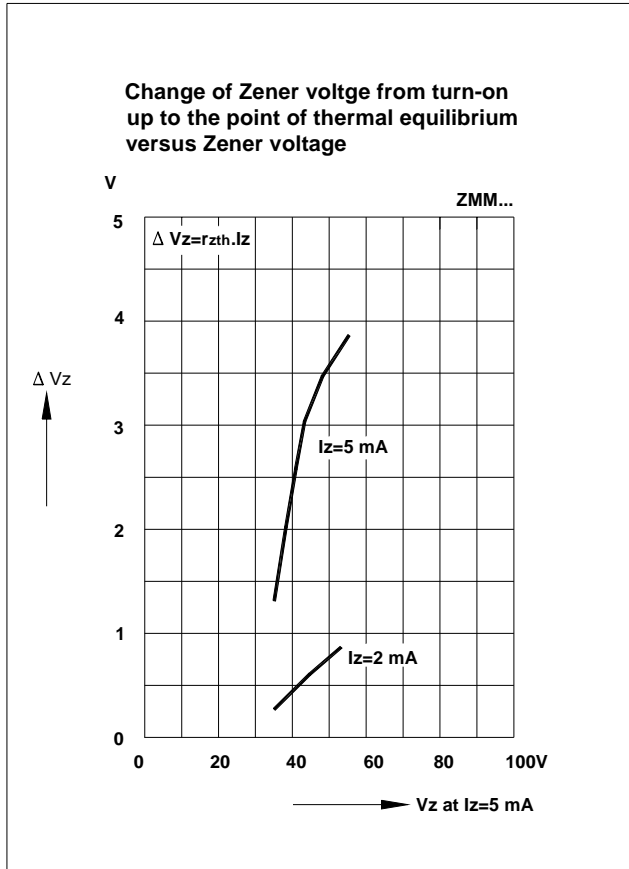

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

