

T-58-11-23

ORDERING INFORMATION MC1723CD 供应商

| Device | Alternate | Temperature Range | Package |
|----------|-----------------------|-------------------|-------------|
| MC1723CD | | 0°C to +70°C | SO-14 |
| MC1723CG | LM723CH, μ A723HC | 0°C to +70°C | Metal Can |
| MC1723CL | LM723CJ, μ A723DC | 0°C to +70°C | Ceramic DIP |
| MC1723CP | LM723CN, μ A723PC | 0°C to +70°C | Plastic DIP |
| MC1723G | | -55°C to +125°C | Metal Can |
| MC1723L | | -55°C to +125°C | Ceramic DIP |

MC1723
MC1723C


VOLTAGE REGULATOR

The MC1723 is a positive or negative voltage regulator designed to deliver load current to 150 mAdc. Output current capability can be increased to several amperes through use of one or more external pass transistors. MC1723 is specified for operation over the military temperature range (-55°C to +125°C) and the MC1723C over the commercial temperature range (0 to +70°C)

- Output Voltage Adjustable from 2 Vdc to 37 Vdc
- Output Current to 150 mAdc Without External Pass Transistors
- 0.01% Line and 0.03% Load Regulation
- Adjustable Short-Circuit Protection

VOLTAGE REGULATOR

SILICON MONOLITHIC INTEGRATED CIRCUIT





P SUFFIX
PLASTIC PACKAGE
CASE 646-06

(Bottom View)



G SUFFIX
METAL PACKAGE
CASE 603-04




L SUFFIX
CERAMIC PACKAGE
CASE 632-08

D SUFFIX
PLASTIC PACKAGE
CASE 751A-02
SO-14




FIGURE 1 - CIRCUIT SCHEMATIC

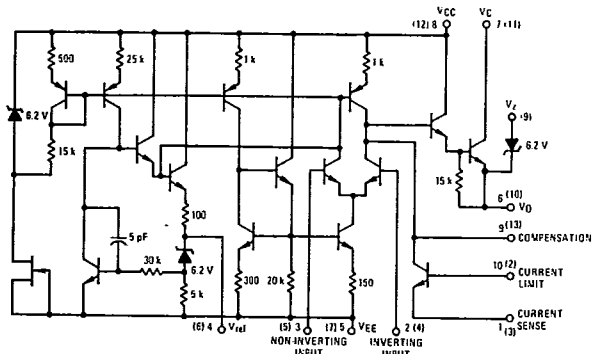

PN NUMBERS ADJACENT TO TERMINALS ARE FOR THE METAL PACKAGE.
PIN NUMBERS IN PARENTHESIS ARE FOR DUAL IN LINE PACKAGES


FIGURE 2 - TYPICAL CIRCUIT CONNECTION

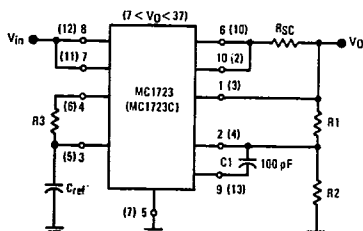

$$V_O \approx 7 \left(\frac{R_1 + R_2}{R_2} \right) \quad I_{SC} = \frac{V_{sense}}{R_{SC}} = \frac{0.66}{R_{SC}} \text{ at } T_J = +25^\circ\text{C}$$

For best results $10\text{ k} < R_2 < 100\text{ k}$
For minimum drift $R_3 = R_1 \parallel R_2$

FIGURE 3 - TYPICAL NPN CURRENT BOOST CONNECTION

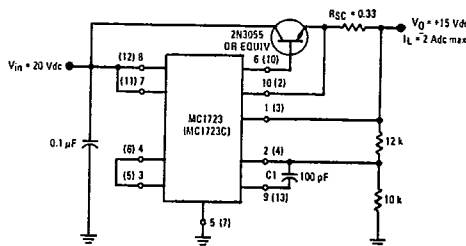

查询"MC1723CD"供应商 MC1723, MC1723C

T-58-11-23

MAXIMUM RATINGS (T_A = +25°C unless otherwise noted.)

| Rating | Symbol | Value | Unit |
|---|-----------------------------------|-------------|-------------------|
| Pulse Voltage from V _{CC} to V _{EE} (50 ms) | V _{in(p)} | 50 | V _{peak} |
| Continuous Voltage from V _{CC} to V _{EE} | V _{in} | 40 | V _{dc} |
| Input-Output Voltage Differential | V _{in} - V _O | 40 | V _{dc} |
| Maximum Output Current | I _L | 150 | mAdc |
| Current from V _{ref} | I _{ref} | 15 | mAdc |
| Current from V _z | I _z | 25 | mA |
| Voltage Between Non-Inverting Input and V _{EE} | V _{ie} | 8.0 | V _{dc} |
| Differential Input Voltage | V _{id} | ± 5.0 | V _{dc} |
| Power Dissipation and Thermal Characteristics | | | |
| Plastic Package | | | |
| T _A = +25°C | P _D | 1.25 | W |
| Derate above T _A = +25°C | 1/θ _{JA} | 10 | mW/°C |
| Thermal Resistance, Junction to Air | θ _{JA} | 100 | °C/W |
| Metal Package | | | |
| T _A = +25°C | P _D | 1.0 | Watt |
| Derate above T _A = +25°C | 1/θ _{JA} | 6.6 | mW/°C |
| Thermal Resistance, Junction to Air | θ _{JA} | 150 | °C/W |
| T_C = +25°C | | | |
| Derate above T _A = +25°C | P _D | 2.1 | Watts |
| Derate above T _A = +25°C | 1/θ _{JA} | 14 | mW/°C |
| Thermal Resistance, Junction to Case | θ _{JC} | 35 | °C/W |
| Dual In-Line Ceramic Package | | | |
| Derate above T _A = +25°C | P _D | 1.5 | Watt |
| Derate above T _A = +25°C | 1/θ _{JA} | 10 | mW/°C |
| Thermal Resistance, Junction to Air | θ _{JA} | 100 | °C/W |
| Operating and Storage Junction Temperature Range | | | |
| Metal Package | T _J , T _{stg} | -65 to +150 | °C |
| Dual In-Line Ceramic | | -65 to +175 | |
| Operating Ambient Temperature Range | | | |
| MC1723C | T _A | 0 to +70 | °C |
| MC1723 | | -55 to +125 | |

ELECTRICAL CHARACTERISTICS (Unless otherwise noted: T_A = +25°C, V_{in} 12 Vdc, V_O = 5.0 Vdc, I_L = 1.0 mAdc, R_{SC} = 0, C₁ = 100 pF, C_{ref} = 0 and divider impedance as seen by the error amplifier ≤ 10 kΩ connected as shown in Figure 2)

| Characteristic | Symbol | MC1723 | | | MC1723C | | | Unit |
|---|----------------------------------|--------|-------|-------|---------|-------|-------|-----------------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Input Voltage Range | V _{in} | 9.5 | - | 40 | 9.5 | - | 40 | V _{dc} |
| Output Voltage Range | V _O | 2.0 | - | 37 | 2.0 | - | 37 | V _{dc} |
| Input-Output Voltage Differential | V _{in} - V _O | 3.0 | - | 38 | 3.0 | - | 38 | V _{dc} |
| Reference Voltage | V _{ref} | 6.95 | 7.15 | 7.35 | 6.80 | 7.15 | 7.50 | V _{dc} |
| Standby Current Drain (I _L = 0, V _{in} = 30 V) | I _{IB} | - | 2.3 | 3.5 | - | 2.3 | 4.0 | mAdc |
| Output Noise Voltage (f = 100 Hz to 10 kHz) | V _n | - | 20 | - | - | 20 | - | μV(RMS) |
| C _{ref} = 0 | | - | 2.5 | - | - | 2.5 | - | |
| C _{ref} = 5.0 μF | | - | - | - | - | - | - | |
| Average Temperature Coefficient of Output Voltage (T _{low} ① < T _A < T _{high} ②) | TCV _O | - | 0.002 | 0.015 | - | 0.003 | 0.015 | %/°C |
| Line Regulation | Reg _{line} | - | 0.01 | 0.1 | - | 0.01 | 0.1 | %V _O |
| (T _A = +25°C) { 12 V < V _{in} < 15 V | | - | 0.02 | 0.2 | - | 0.1 | 0.5 | |
| (T _{low} ① < T _A < T _{high} ②) | | - | - | 0.3 | - | - | 0.3 | |
| 12 V < V _{in} < 15 V | | - | - | - | - | - | - | |
| Load Regulation (1.0 mA < I _L < 50 mA) | Reg _{load} | - | 0.03 | 0.15 | - | 0.03 | 0.2 | %V _O |
| T _A = +25°C | | - | - | 0.6 | - | - | 0.6 | |
| T _{low} ① < T _A < T _{high} ② | | - | - | - | - | - | - | |
| Ripple Rejection (f = 50 Hz to 10 kHz) | RR | - | 74 | - | - | 74 | - | dB |
| C _{ref} = 0 | | - | 86 | - | - | 86 | - | |
| C _{ref} = 5.0 μF | | - | - | - | - | - | - | |
| Short Circuit Current Limit (R _{SC} = 10 Ω, V _O = 0) | I _{sc} | - | 65 | - | - | 65 | - | mAdc |
| Long Term Stability | ΔV _O /Δt | - | 0.1 | - | - | 0.1 | - | %/1000 Hr |

① T_{low} = 0°C for MC1723C
= -55°C for MC1723

② T_{high} = +70°C for MC1723C
= +125°C for MC1723

查询"MC1723CD"供应商

MC1723, MC1723C

T-58-11-23

TYPICAL CHARACTERISTICS

($V_{in} = 12 \text{ Vdc}$, $V_O = 5.0 \text{ Vdc}$, $I_L = 1.0 \text{ mA}$, $R_{SC} = 0$, $T_A = +25^\circ\text{C}$ unless otherwise noted.)

FIGURE 4 - MAXIMUM LOAD CURRENT AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

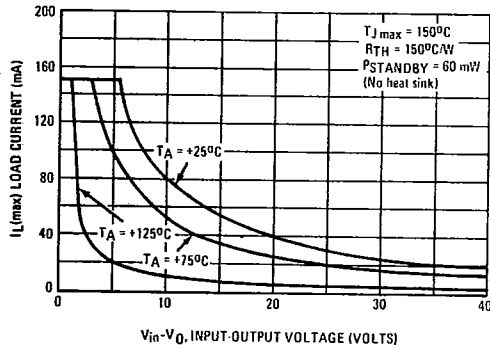


FIGURE 5 - LOAD REGULATION CHARACTERISTICS WITHOUT CURRENT LIMITING

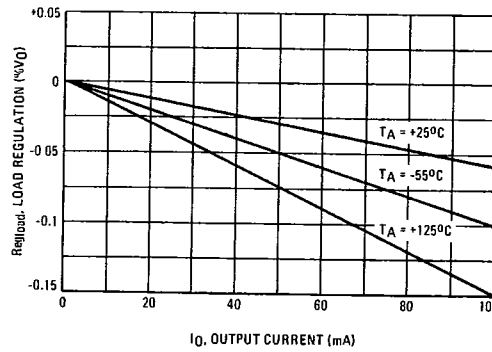


FIGURE 6 - LOAD REGULATION CHARACTERISTICS WITH CURRENT LIMITING

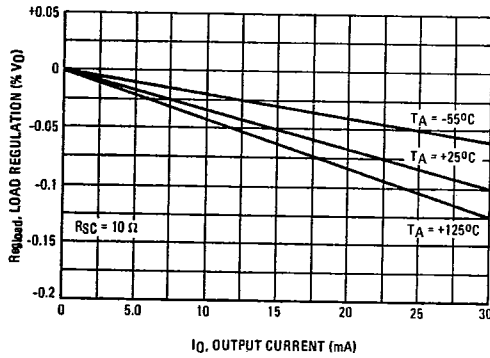


FIGURE 7 - LOAD REGULATION CHARACTERISTICS WITH CURRENT LIMITING

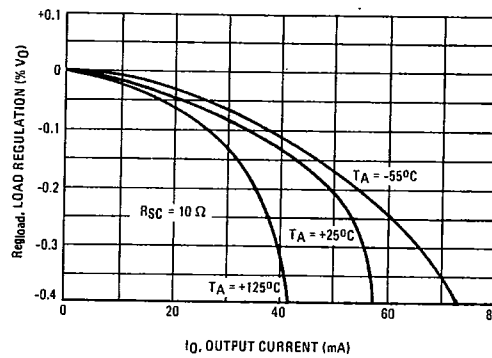


FIGURE 8 - CURRENT LIMITING CHARACTERISTICS


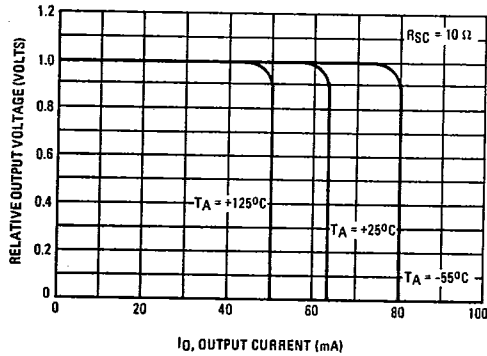


FIGURE 9 - CURRENT LIMITING CHARACTERISTICS AS A FUNCTION OF JUNCTION TEMPERATURE

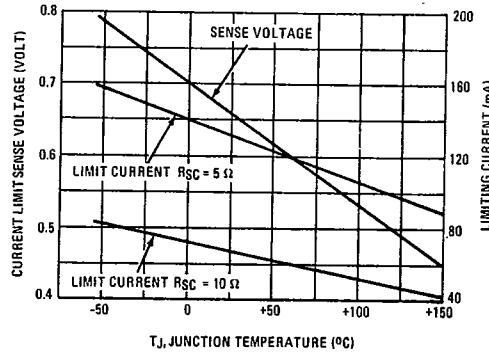

查询"MC1723CD"供应商 MC1723, MC1723C

T-58-11-23

TYPICAL CHARACTERISTICS (continued)

FIGURE 10 - LINE REGULATION AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

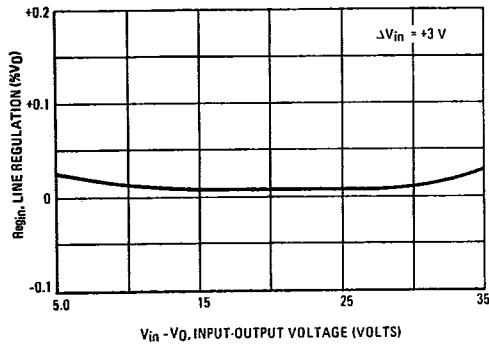


FIGURE 11 - LOAD REGULATION AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

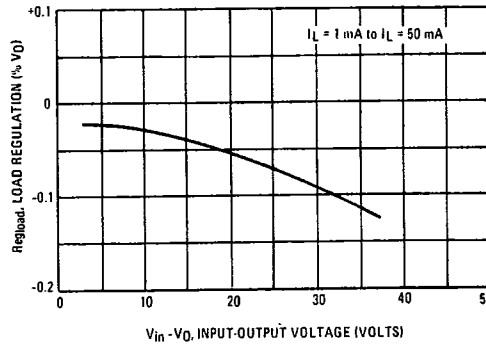


FIGURE 12 - STANDBY CURRENT DRAIN AS A FUNCTION OF INPUT VOLTAGE

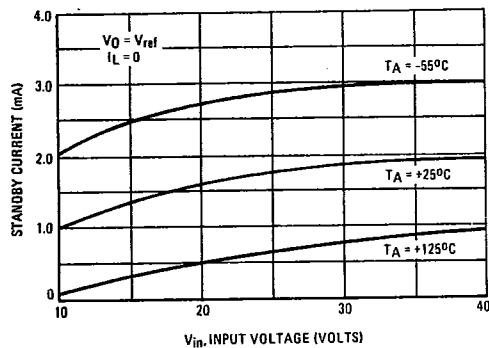


FIGURE 13 - LINE TRANSIENT RESPONSE

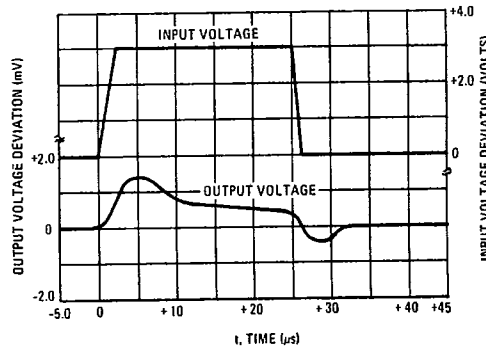


FIGURE 14 - LOAD TRANSIENT RESPONSE


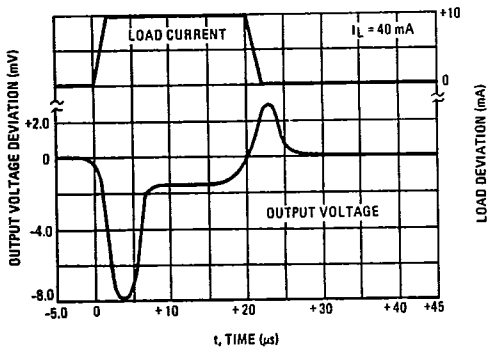


FIGURE 15 - OUTPUT IMPEDANCE AS FUNCTION OF FREQUENCY

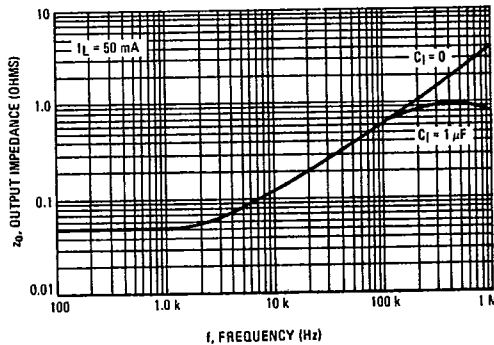

查询"MC1723CD"供应商 MC1723, MC1723C

T-58-11-23

TYPICAL APPLICATIONS

Pin numbers adjacent to terminals are for the metal package;
pin numbers in parenthesis are for the dual in-line packages.

FIGURE 16 - TYPICAL CONNECTION FOR $2 < V_O < 7$

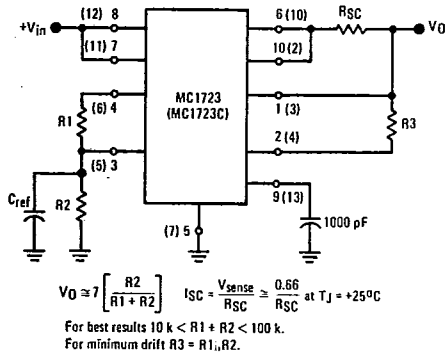


FIGURE 17 - MC1723,C FOLDBACK CONNECTION

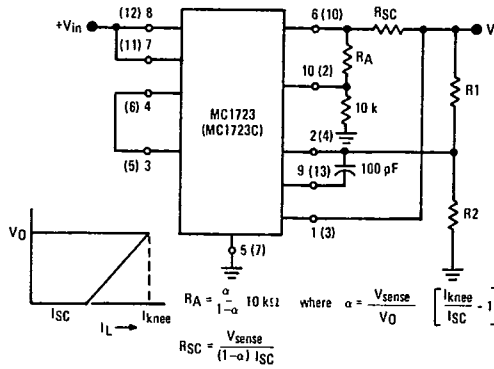


FIGURE 18 - +5 V, 1-AMPERE SWITCHING REGULATOR

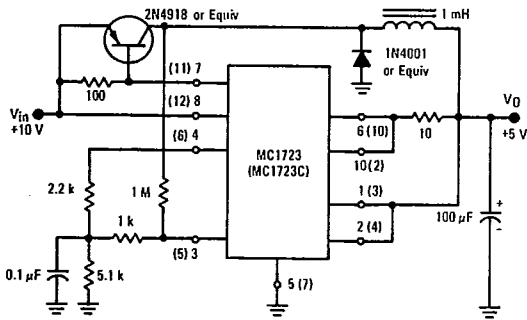


FIGURE 19 - +5 V, 1-AMPERE HIGH EFFICIENCY REGULATOR

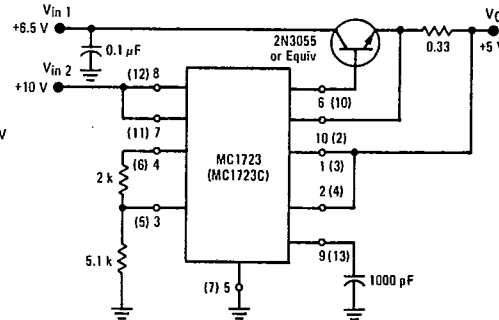


FIGURE 20 - +15 V, 1-AMPERE REGULATOR WITH REMOTE SENSE


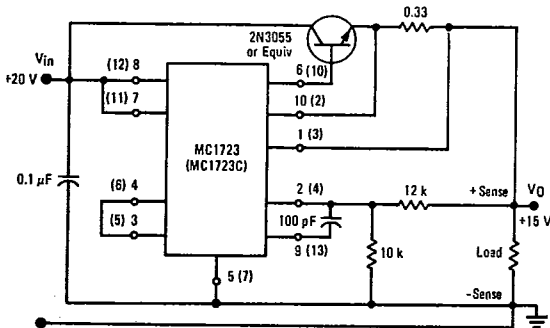



FIGURE 21 - -15 V NEGATIVE REGULATOR

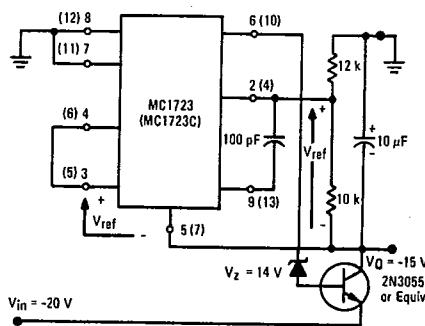

[查询"MC1723CD"供应商](#) MC1723, MC1723C

7-58-11-23

TYPICAL APPLICATIONS (continued)
FIGURE 22 - +12 V, 1-AMPERE REGULATOR
USING PNP CURRENT BOOST

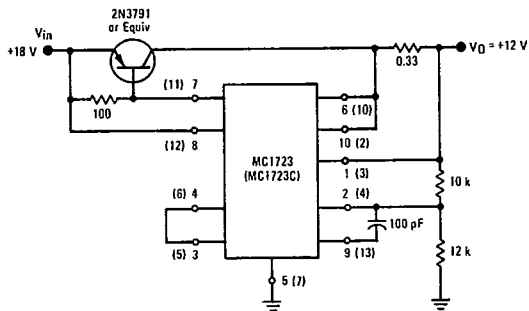


查询"MC1723CD"供应商
PACKAGE OUTLINE DIMENSIONS (continued)

**T SUFFIX
 PLASTIC PACKAGE
 CASE 314D-02**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|--------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 14.529 | 15.570 | 0.572 | 0.613 |
| B | 9.908 | 10.541 | 0.390 | 0.415 |
| C | 4.318 | 4.572 | 0.170 | 0.180 |
| D | 0.635 | 0.965 | 0.025 | 0.038 |
| E | 1.169 | 1.397 | 0.046 | 0.055 |
| G | 1.702 BSC | | 0.067 BSC | |
| H | 2.109 | 2.717 | 0.083 | 0.107 |
| J | 0.381 | 0.635 | 0.015 | 0.025 |
| K | 25.907 | 26.670 | 1.016 | 1.050 |
| L | 8.052 | 9.398 | 0.317 | 0.370 |
| Q | 3.556 | 3.937 | 0.140 | 0.155 |
| U | 11.883 | 12.827 | 0.468 | 0.505 |


NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

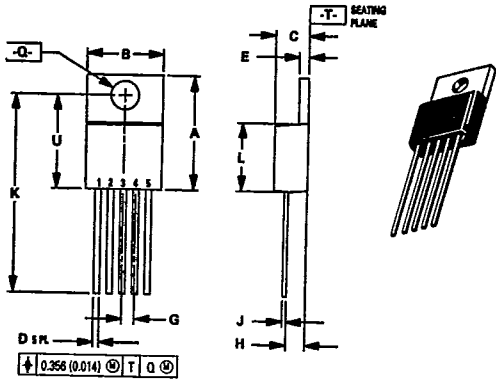

**DT-1 SUFFIX
 PLASTIC PACKAGE
 CASE 369-03**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 5.97 | 6.72 | 0.235 | 0.245 |
| B | 6.35 | 6.73 | 0.250 | 0.265 |
| C | 2.19 | 2.38 | 0.086 | 0.094 |
| D | 0.69 | 0.88 | 0.027 | 0.035 |
| E | 0.84 | 0.94 | 0.033 | 0.037 |
| F | 0.77 | 1.14 | 0.030 | 0.045 |
| G | 2.29 BSC | | 0.090 BSC | |
| H | 0.97 | 1.06 | 0.038 | 0.042 |
| J | 0.46 | 0.58 | 0.018 | 0.023 |
| K | 8.89 | 9.65 | 0.350 | 0.380 |
| R | 5.21 | 5.46 | 0.205 | 0.215 |
| S | 1.91 | 2.28 | 0.075 | 0.090 |
| V | 0.89 | 1.27 | 0.035 | 0.050 |


NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

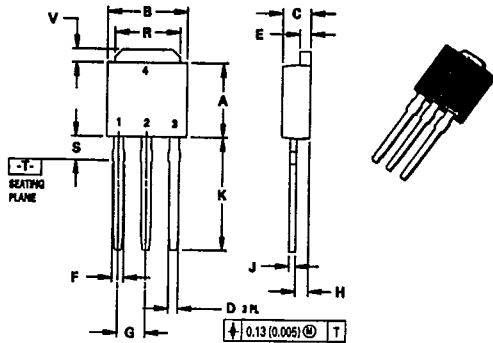

**DT SUFFIX
 PLASTIC PACKAGE
 CASE 369A-03
 DPAK**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 5.97 | 6.22 | 0.235 | 0.245 |
| B | 6.35 | 6.73 | 0.250 | 0.265 |
| C | 2.19 | 2.38 | 0.086 | 0.094 |
| D | 0.69 | 0.88 | 0.027 | 0.035 |
| E | 0.84 | 0.94 | 0.033 | 0.037 |
| F | 0.77 | 1.14 | 0.030 | 0.045 |
| G | 4.58 BSC | | 0.180 BSC | |
| H | 0.97 | 1.06 | 0.038 | 0.042 |
| J | 0.46 | 0.58 | 0.018 | 0.023 |
| K | 2.60 | 2.89 | 0.102 | 0.114 |
| L | 2.29 BSC | | 0.090 BSC | |
| R | 5.21 | 5.46 | 0.205 | 0.215 |
| S | 0.64 | 0.88 | 0.025 | 0.035 |
| U | 0.51 | — | 0.020 | — |
| V | 0.89 | 1.27 | 0.035 | 0.050 |
| Y | 4.32 | — | 0.170 | — |

NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

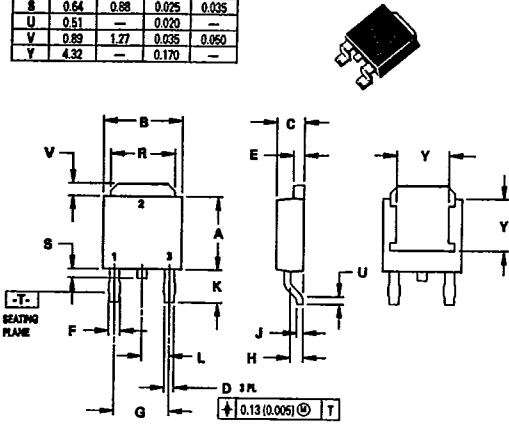


**H, G SUFFIX
 METAL PACKAGE
 CASE 603-04
 $R_{\theta JA} = 160^{\circ}\text{C/W}$
 (TO-100)**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 8.51 | 9.29 | 0.335 | 0.370 |
| B | 7.75 | 8.51 | 0.305 | 0.335 |
| C | 4.19 | 4.70 | 0.165 | 0.185 |
| D | 0.407 | 0.533 | 0.016 | 0.021 |
| E | — | 1.02 | — | 0.040 |
| F | 0.406 | 0.483 | 0.016 | 0.019 |
| G | 5.84 BSC | | 0.230 BSC | |
| H | 0.712 | 0.864 | 0.028 | 0.034 |
| J | 0.737 | 1.14 | 0.029 | 0.045 |
| K | 12.70 | — | 0.500 | — |
| L | 6.35 | 12.70 | 0.250 | 0.500 |
| M | 36° BSC | | 36° BSC | |
| P | — | 1.27 | — | 0.050 |
| Q | 3.56 | 4.06 | 0.140 | 0.160 |
| R | 0.254 | 1.02 | 0.010 | 0.040 |

NOTE:
 LEADS WITHIN 0.18 mm (0.007) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.

All JEDEC Dimensions and Notes Apply.

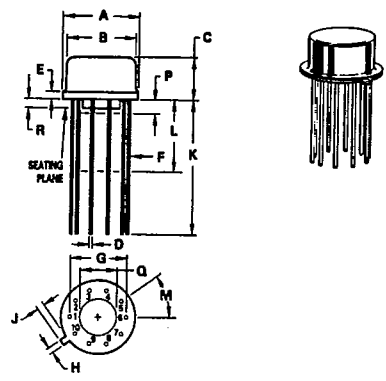


查询"MC1723CD"供应商

PACKAGE OUTLINE DIMENSIONS (continued)

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 8.51 | 9.39 | 0.335 | 0.370 |
| B | 7.75 | 8.51 | 0.305 | 0.335 |
| C | 4.19 | 6.73 | 0.165 | 0.265 |
| D | 0.407 | 0.533 | 0.016 | 0.021 |
| E | — | 1.02 | — | 0.040 |
| F | 0.406 | 0.483 | 0.016 | 0.019 |
| G | 5.84 BSC | | 0.230 BSC | |
| H | 0.712 | 0.864 | 0.028 | 0.034 |
| J | 0.737 | 1.14 | 0.029 | 0.045 |
| K | 12.70 | — | 0.500 | — |
| L | 6.35 | 12.70 | 0.250 | 0.500 |
| M | 36° BSC | | 36° BSC | |
| P | — | 1.27 | — | 0.050 |
| Q | 3.56 | 4.06 | 0.140 | 0.160 |
| R | 0.254 | 1.02 | 0.010 | 0.040 |

**G SUFFIX
METAL PACKAGE
CASE 603C-01**
R_{θJA} = 150°C/W (TYP)
(TO-100)




- NOTES:
- LEADS WITHIN 0.18 mm (0.007) RADIUS OF TRUE POSITION TO DIM. "A" & "H" AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 - LEAD DIA UNCONTROLLED BEYOND DIM "K" MIN.

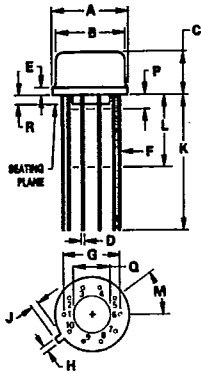

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 19.05 | 19.94 | 0.750 | 0.785 |
| B | 6.10 | 7.49 | 0.240 | 0.295 |
| C | — | 5.08 | — | 0.200 |
| D | 0.38 | 0.53 | 0.015 | 0.021 |
| F | 1.40 | 1.78 | 0.055 | 0.070 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 0.51 | 1.14 | 0.020 | 0.045 |
| J | 0.20 | 0.30 | 0.008 | 0.012 |
| K | 3.18 | 4.32 | 0.125 | 0.170 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | — | 15° | — | 15° |
| N | 0.51 | 1.02 | 0.020 | 0.040 |

**DP2, D, J, L, N SUFFIX
CERAMIC PACKAGE
CASE 620-10**
R_{θJA} = 100°C/W (TYP)


- NOTES:
- LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 - PACKAGE INDEX: NOTCH IN LEAD NOTCH IN CERAMIC OR INK DOT.
 - DIM "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 - DIM "A" AND "B" DO NOT INCLUDE GLASS RUN-OUT.
 - DIM "F" MAY NARROW TO 0.76 mm (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

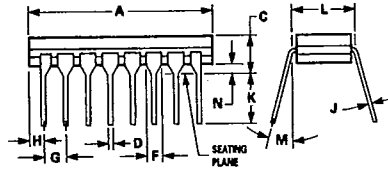

**N, P1 SUFFIX
PLASTIC PACKAGE
CASE 626-05**
R_{θJA} = 100°C/W (TYP)

- NOTES:
- LEAD POSITIONAL TOLERANCE:
⊕ ± 0.13 (0.005) ⊕ T A ⊕ B ⊕
 - DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
 - PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
 - DIMENSIONS A AND B ARE DATUMS.
 - DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.


| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 9.40 | 10.16 | 0.370 | 0.400 |
| B | 6.10 | 6.60 | 0.240 | 0.260 |
| C | 3.94 | 4.45 | 0.155 | 0.175 |
| D | 0.38 | 0.51 | 0.015 | 0.020 |
| F | 1.02 | 1.52 | 0.040 | 0.060 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 0.76 | 1.27 | 0.030 | 0.050 |
| J | 0.20 | 0.30 | 0.008 | 0.012 |
| K | 2.92 | 3.43 | 0.115 | 0.135 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | — | 10° | — | 10° |
| N | 0.76 | 1.01 | 0.030 | 0.040 |

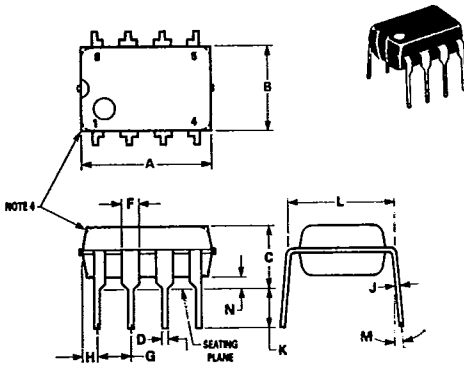

**L SUFFIX
CERAMIC PACKAGE
CASE 632-08**
R_{θJA} = 100°C/W (TYP)
(TO-116)

- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 - CONTROLLING DIMENSION: INCH.
 - DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
 - DIM F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 19.05 | 19.94 | 0.750 | 0.785 |
| B | 6.23 | 7.11 | 0.245 | 0.280 |
| C | 3.94 | 5.08 | 0.155 | 0.200 |
| D | 0.39 | 0.50 | 0.015 | 0.020 |
| F | 1.40 | 1.65 | 0.055 | 0.065 |
| G | 2.54 BSC | | 0.100 BSC | |
| J | 0.21 | 0.38 | 0.008 | 0.015 |
| K | 3.18 | 4.31 | 0.125 | 0.170 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | 0° | 15° | 0° | 15° |
| N | 0.51 | 1.01 | 0.020 | 0.040 |




查询"MC1723CD"供应商
PACKAGE OUTLINE DIMENSIONS (continued)

**N, P, N-14, P2 SUFFIX
 PLASTIC PACKAGE
 CASE 646-06
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 18.16 | 19.56 | 0.715 | 0.770 |
| B | 6.10 | 6.62 | 0.240 | 0.260 |
| C | 3.69 | 4.69 | 0.145 | 0.185 |
| D | 0.39 | 0.53 | 0.015 | 0.021 |
| F | 1.02 | 1.79 | 0.040 | 0.070 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 1.22 | 2.41 | 0.052 | 0.095 |
| J | 0.20 | 0.38 | 0.008 | 0.015 |
| K | 2.92 | 3.43 | 0.115 | 0.135 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | 0° | 10° | 0° | 10° |
| N | 0.39 | 1.01 | 0.015 | 0.039 |


- NOTES:
 1. LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 2. DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 3. DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.
 4. ROUNDED CORNERS OPTIONAL.

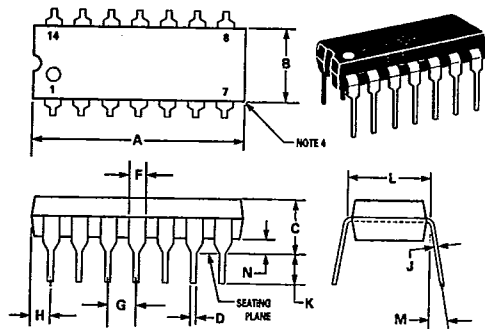

**N, P SUFFIX
 PLASTIC PACKAGE
 CASE 648-08
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 18.80 | 19.55 | 0.740 | 0.770 |
| B | 6.35 | 6.85 | 0.250 | 0.270 |
| C | 3.69 | 4.44 | 0.145 | 0.175 |
| D | 0.39 | 0.53 | 0.015 | 0.021 |
| F | 1.02 | 1.77 | 0.040 | 0.070 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 1.27 BSC | | 0.050 BSC | |
| J | 0.21 | 0.38 | 0.008 | 0.015 |
| K | 2.90 | 3.30 | 0.110 | 0.130 |
| L | 7.50 | 7.74 | 0.295 | 0.305 |
| M | 0° | 10° | 0° | 10° |
| S | 0.51 | 1.01 | 0.020 | 0.040 |


- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 4. DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.
 5. ROUNDED CORNERS OPTIONAL.

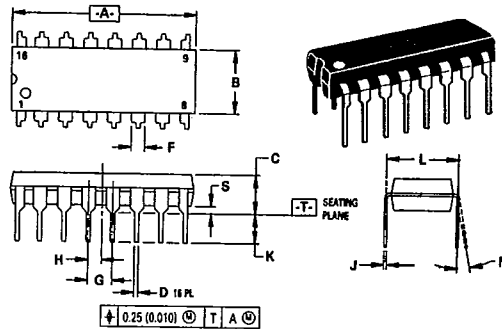

**P SUFFIX
 PLASTIC PACKAGE
 CASE 648C-02**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 18.80 | 21.34 | 0.740 | 0.840 |
| B | 6.10 | 6.50 | 0.240 | 0.260 |
| C | 3.69 | 4.69 | 0.145 | 0.185 |
| D | 0.39 | 0.53 | 0.015 | 0.021 |
| F | 1.02 | 1.79 | 0.040 | 0.070 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 0.39 | 2.41 | 0.015 | 0.095 |
| J | 0.20 | 0.38 | 0.008 | 0.015 |
| K | 2.92 | 3.43 | 0.115 | 0.135 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | 0° | 10° | 0° | 10° |
| N | 0.39 | 1.01 | 0.015 | 0.040 |


- NOTES:
 1. LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 2. DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 3. DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.
 4. ROUNDED CORNERS OPTIONAL.
 5. EXTERNAL LEAD CONNECTION, BETWEEN 4 AND 5, 12 AND 13 AS SHOWN.

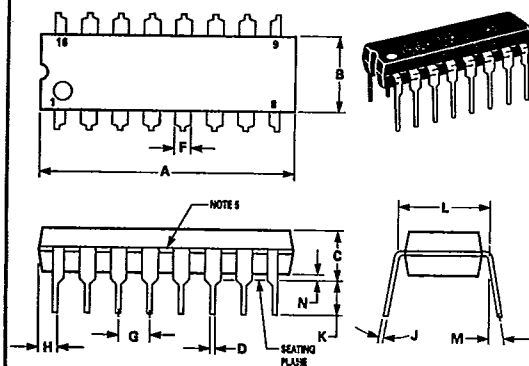

**J-8, J, JG, U, Z SUFFIX
 CERAMIC PACKAGE
 CASE 693-02
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$**

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 9.91 | 10.92 | 0.390 | 0.430 |
| B | 6.22 | 6.99 | 0.245 | 0.275 |
| C | 4.32 | 5.08 | 0.170 | 0.200 |
| D | 0.41 | 0.51 | 0.016 | 0.020 |
| F | 1.40 | 1.65 | 0.055 | 0.065 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 1.14 | 1.65 | 0.045 | 0.065 |
| J | 0.20 | 0.30 | 0.008 | 0.012 |
| K | 3.18 | 4.06 | 0.125 | 0.160 |
| L | 7.37 | 7.87 | 0.290 | 0.310 |
| M | — | 15° | — | 15° |
| N | 0.51 | 1.02 | 0.020 | 0.040 |

- NOTES:
 1. LEADS WITHIN 0.13 mm (0.005) RAD OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 2. DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.

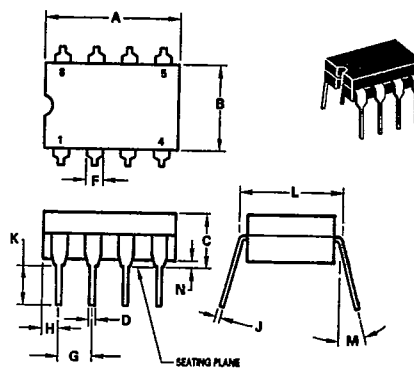


查询"MC1723CD"供应商


PACKAGE OUTLINE DIMENSIONS (continued)

**A, B, N, P SUFFIX
PLASTIC PACKAGE
CASE 707-02**
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 22.22 | 23.24 | 0.875 | 0.915 |
| B | 6.10 | 6.60 | 0.240 | 0.260 |
| C | 3.56 | 4.57 | 0.140 | 0.180 |
| D | 0.36 | 0.56 | 0.014 | 0.022 |
| F | 1.27 | 1.78 | 0.050 | 0.070 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 1.02 | 1.52 | 0.040 | 0.060 |
| J | 0.20 | 0.30 | 0.008 | 0.012 |
| K | 2.92 | 3.43 | 0.115 | 0.135 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | 0° | 15° | 0° | 15° |
| N | 0.51 | 1.02 | 0.020 | 0.040 |



- NOTES:
1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25mm(0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
 2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
 3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

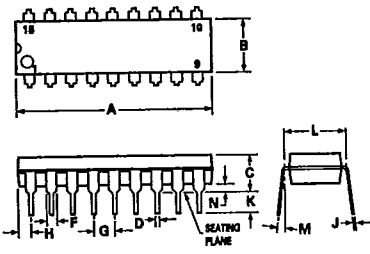


**J, L SUFFIX
CERAMIC PACKAGE
CASE 726-04**
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 22.25 | 23.11 | 0.880 | 0.910 |
| B | 6.10 | 7.49 | 0.240 | 0.295 |
| C | — | 5.08 | — | 0.200 |
| D | 0.38 | 0.53 | 0.015 | 0.021 |
| F | 1.40 | 1.78 | 0.055 | 0.070 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 0.51 | 1.14 | 0.020 | 0.045 |
| J | 0.20 | 0.30 | 0.008 | 0.012 |
| K | 3.18 | 4.32 | 0.125 | 0.170 |
| L | 7.62 BSC | | 0.300 BSC | |
| M | 0° | 15° | 0° | 15° |
| N | 0.51 | 1.02 | 0.020 | 0.040 |



- NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25 mm (0.010) DIA. AT SEATING PLANE, AT MAXIMUM MATERIAL CONDITION.
 2. DIM "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 3. DIM "A" & "B" INCLUDES MENISCUS.
 4. "F" DIMENSION IS FOR FULL LEADS. "HALF" LEADS ARE OPTIONAL AT LEAD POSITIONS 1, 9, 10, AND 18.

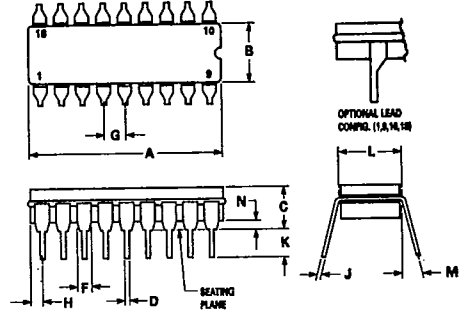


**D SUFFIX
CASE 751-03
PLASTIC PACKAGE
SO-8, SOP-8**
 $R_{\theta JA} = 190^{\circ}\text{C/W (SO-8)}$
 $R_{\theta JA} = 160^{\circ}\text{C/W (SOP-8)}$

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 4.80 | 5.00 | 0.189 | 0.198 |
| B | 3.80 | 4.00 | 0.150 | 0.157 |
| C | 1.35 | 1.75 | 0.054 | 0.068 |
| D | 0.35 | 0.49 | 0.014 | 0.019 |
| F | 0.40 | 1.25 | 0.016 | 0.049 |
| G | 1.27 BSC | | 0.050 BSC | |
| J | 0.19 | 0.25 | 0.008 | 0.009 |
| K | 0.10 | 0.25 | 0.004 | 0.009 |
| M | 0° | 7° | 0° | 7° |
| P | 5.80 | 6.20 | 0.229 | 0.244 |
| R | 0.25 | 0.50 | 0.010 | 0.019 |




- NOTES:
1. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.
 2. POSITIONAL TOLERANCE FOR D DIMENSION (8 PLACES):
 $\pm 0.25 (0.010) \text{ (T) B (A)}$
 3. POSITIONAL TOLERANCE FOR P DIMENSION (4 PLACES):
 $\pm 0.25 (0.010) \text{ (B)}$
 4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 5. CONTROLLING DIMENSION: MILLIMETER.
 6. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 7. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

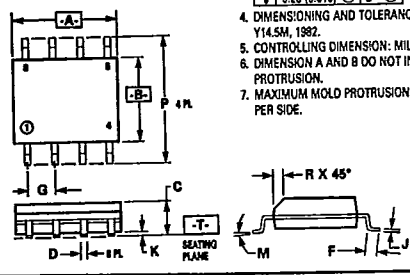


**D SUFFIX
PLASTIC PACKAGE
CASE 751A-02
SO-14**
 $R_{\theta JA} = 145^{\circ}\text{C/W (TYP)}$

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 8.55 | 8.75 | 0.337 | 0.344 |
| B | 3.80 | 4.00 | 0.150 | 0.157 |
| C | 1.35 | 1.75 | 0.054 | 0.068 |
| D | 0.35 | 0.49 | 0.014 | 0.019 |
| F | 0.40 | 1.25 | 0.016 | 0.049 |
| G | 1.27 BSC | | 0.050 BSC | |
| J | 0.18 | 0.25 | 0.008 | 0.009 |
| K | 0.10 | 0.25 | 0.004 | 0.009 |
| M | 0° | 7° | 0° | 7° |
| P | 5.80 | 6.20 | 0.229 | 0.244 |
| R | 0.25 | 0.50 | 0.010 | 0.019 |



- NOTES:
1. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.
 2. POSITIONAL TOLERANCE FOR D DIMENSION (14 PLACES):
 $\pm 0.25 (0.010) \text{ (T) B (A)}$
 3. POSITIONAL TOLERANCE FOR P DIMENSION (7 PLACES):
 $\pm 0.25 (0.010) \text{ (B)}$
 4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 5. CONTROLLING DIMENSION: MILLIMETER.
 6. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 7. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

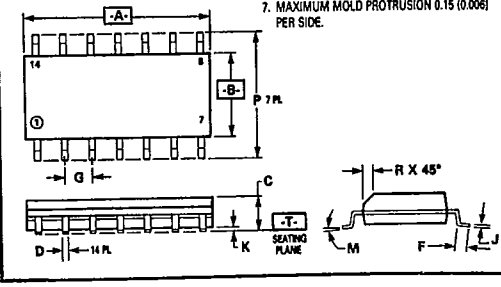

查询"MC1723CD"供应商

DW SUFFIX PLASTIC PACKAGE CASE 751G-01 SO-16L

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 10.15 | 10.45 | 0.400 | 0.411 |
| B | 7.40 | 7.60 | 0.292 | 0.299 |
| C | 2.35 | 2.65 | 0.093 | 0.104 |
| D | 0.35 | 0.49 | 0.014 | 0.019 |
| F | 0.50 | 0.90 | 0.020 | 0.035 |
| G | 1.27 BSC | | 0.050 BSC | |
| J | 0.25 | 0.32 | 0.010 | 0.012 |
| K | 0.10 | 0.25 | 0.004 | 0.009 |
| M | 0° | 7° | 0° | 7° |
| P | 10.05 | 10.55 | 0.395 | 0.415 |
| | 0.25 | 0.75 | 0.010 | 0.029 |

NOTES:

- DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: MILLIMETER.
- DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
- MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

CASE 762-01 PLASTIC MEDIUM POWER PACKAGE SIP-9

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 22.40 | 23.00 | 0.873 | 0.907 |
| B | 6.40 | 6.80 | 0.252 | 0.269 |
| C | 3.45 | 3.65 | 0.135 | 0.143 |
| D | 0.40 | 0.55 | 0.015 | 0.021 |
| E | 3.35 | 3.60 | 0.269 | 0.377 |
| F | 1.40 | 1.60 | 0.055 | 0.062 |
| G | 2.54 BSC | | 0.100 BSC | |
| H | 1.81 | 1.71 | 0.069 | 0.067 |
| J | 0.380 | 0.400 | 0.014 | 0.015 |
| K | 3.30 | 4.20 | 0.130 | 0.165 |
| M | 3° BSC | | 3° BSC | |
| N | 2.50 | 2.70 | 0.099 | 0.106 |
| Q | 3.15 | 3.45 | 0.124 | 0.135 |
| R | 13.80 | 13.90 | 0.539 | 0.547 |
| S | 1.65 | 1.95 | 0.064 | 0.076 |
| T | 22.00 | 22.20 | 0.866 | 0.874 |
| V | 0.55 | 0.75 | 0.021 | 0.029 |
| W | 2.89 BSC | | 0.113 BSC | |
| X | 0.85 | 0.75 | 0.033 | 0.029 |
| Y | 2.70 | 2.90 | 0.106 | 0.110 |

NOTES:

- DIMENSIONS A, AND C ARE DATUMS. AND -T- IS A DATUM PLANE.
- POSITIONAL TOLERANCE FOR LEAD DIMENSION D:
 $\pm 0.25 (0.010) \text{ (T) | A (M)}$
- POSITIONAL TOLERANCE FOR LEAD DIMENSION J:
 $\pm 0.25 (0.010) \text{ (T) | C (M)}$
- POSITIONAL TOLERANCE FOR LEAD DIMENSION Q:
 $\pm 0.25 (0.010) \text{ (T) | A (M)}$
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.
- CONTROLLING DIMENSION: MILLIMETER.