

# LMV851/LMV852/LMV854 8 MHz Low Power CMOS, EMI Hardened Operational Amplifiers

## General Description

National's LMV851/LMV852/LMV854 are CMOS input, low power op amp ICs, providing a low input bias current, a wide temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  and exceptional performance, making them robust general purpose parts. Additionally, the LMV851/LMV852/LMV854 are EMI hardened to minimize any interference so they are ideal for EMI sensitive applications. The unity gain stable LMV851/LMV852/LMV854 feature 8 MHz of bandwidth while consuming only 0.4 mA of current per channel. These parts also maintain stability for capacitive loads as large as 200 pF. The LMV851/LMV852/LMV854 provide superior performance and economy in terms of power and space usage. This family of parts has a maximum input offset voltage of 1 mV, a rail-to-rail output stage and an input common-mode voltage range that includes ground. Over an operating supply range from 2.7V to 5.5V the LMV851/LMV852/LMV854 provide a CMRR of 92 dB, and a PSRR of 93 dB. The LMV851/LMV852/LMV854 are offered in the space saving 5-Pin SC70 package, the 8-Pin MSOP and the 14-Pin TSSOP package.

## Features


Unless otherwise noted, typical values at  $T_A = 25^{\circ}\text{C}$ ,  $V_{\text{SUPPLY}} = 3.3\text{V}$

■ Supply voltage	2.7V to 5.5V
■ Supply current (per channel)	0.4 mA
■ Input offset voltage	1 mV max
■ Input bias current	0.1 pA
■ GBW	8 MHz
■ EMIRR at 1.8 GHz	87 dB
■ Input noise voltage at 1 kHz	11 nV/ $\sqrt{\text{Hz}}$
■ Slew rate	4.5 V/ $\mu\text{s}$
■ Output voltage swing	Rail-to-Rail
■ Output current drive	30 mA
■ Operating ambient temperature range	$-40^{\circ}\text{C}$ to $125^{\circ}\text{C}$

## Applications

- Photodiode preamp
- Piezoelectric sensors
- Portable/battery-powered electronic equipment
- Filters/buffers
- PDAs/phone accessories
- Medical diagnosis equipment

## Typical Application

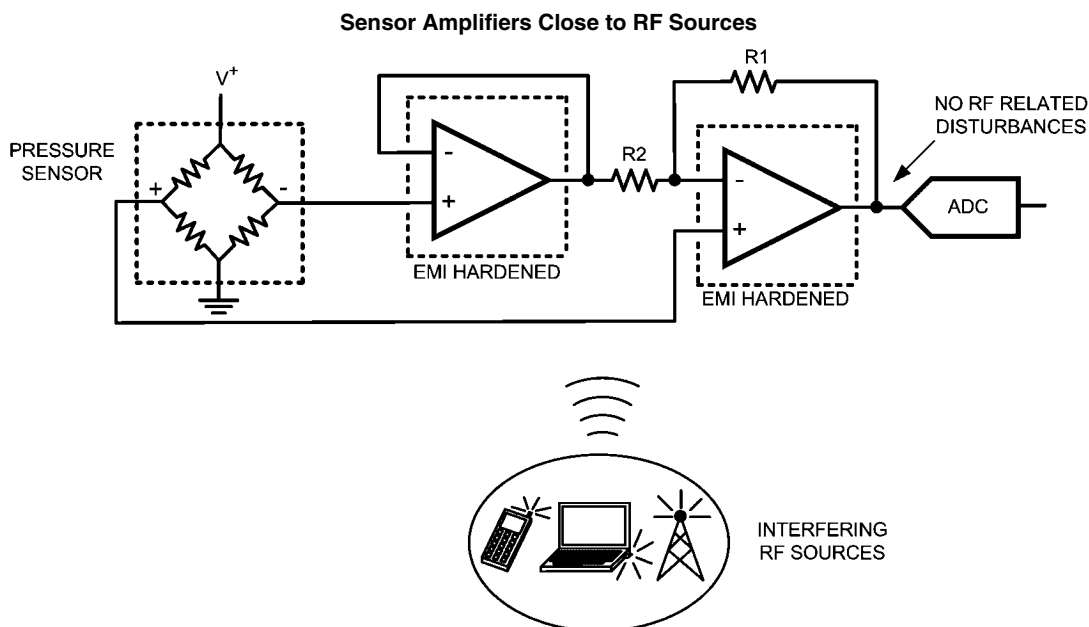

20202101

**Absolute Maximum Ratings** (Note 1)

查询"LMV851MG"供应商

If Military/Aerospace specified devices are required,  
please contact the National Semiconductor Sales Office/  
Distributors for availability and specifications.

ESD Tolerance (Note 2)

Human Body Model 2 kV

Charge-Device Model 1 kV

Machine Model 200V

 $V_{IN}$  Differential  $\pm$  Supply VoltageSupply Voltage ( $V^+ - V^-$ ) 6VVoltage at Input/Output Pins  $V^+ + 0.4V$   
 $V^- - 0.4V$ Storage Temperature Range  $-65^\circ\text{C}$  to  $+150^\circ\text{C}$ Junction Temperature (Note 3)  $+150^\circ\text{C}$ Soldering Information  
Infrared or Convection (20 sec)  $+260^\circ\text{C}$ **Operating Ratings** (Note 1)Temperature Range (Note 3)  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ Supply Voltage ( $V^+ - V^-$ ) 2.7V to 5.5VPackage Thermal Resistance ( $\theta_{JA}$  (Note 3))5-Pin SC70 313  $^\circ\text{C}/\text{W}$ 8-Pin MSOP 217  $^\circ\text{C}/\text{W}$ 14-Pin TSSOP 135  $^\circ\text{C}/\text{W}$ **3.3V Electrical Characteristics** (Note 4)Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 3.3V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ , and  $R_L = 10\text{ k}\Omega$  to  $V^+/2$ .**Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
$V_{OS}$	Input Offset Voltage			$\pm 0.26$ (Note 9)	$\pm 1$ <b><math>\pm 1.2</math></b>	mV
$TCV_{OS}$	Input Offset Voltage Drift (Note 10)			$\pm 0.4$ (Note 9)	$\pm 2$	$\mu\text{V}/^\circ\text{C}$
$I_B$	Input Bias Current (Note 10)			0.1	10 <b>500</b>	pA
$I_{OS}$	Input Offset Current			1		pA
CMRR	Common Mode Rejection Ratio	$-0.2V < V_{CM} < V^+ - 1.2V$	76 <b>75</b>	92 (Note 9)		dB
PSRR	Power Supply Rejection Ratio	$2.7V \leq V^+ \leq 5.5V$ , $V_{OUT} = 1V$	75 <b>74</b>	93 (Note 9)		dB
EMIRR	EMI Rejection Ratio, IN+ and IN- (Note 8)	$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 400\text{ MHz}$		64		dB
		$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 900\text{ MHz}$		78		
		$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 1800\text{ MHz}$		87		
		$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 2400\text{ MHz}$		90		
CMVR	Input Common-Mode Voltage Range	$CMRR \geq 76\text{ dB}$	-0.2		2.1	V
$A_{VOL}$	Large Signal Voltage Gain (Note 11)	$R_L = 2\text{ k}\Omega$ , $V_{OUT} = 0.15V$ to $1.65V$ , $V_{OUT} = 3.15V$ to $1.65V$	100 <b>97</b>	114		dB
		$R_L = 10\text{ k}\Omega$ , $V_{OUT} = 0.1V$ to $1.65V$ , $V_{OUT} = 3.2V$ to $1.65V$	100 <b>97</b>	115		
$V_O$	Output Swing High, (measured from $V^+$ )	$R_L = 2\text{ k}\Omega$ to $V^+/2$		31	35 <b>43</b>	mV
		$R_L = 10\text{ k}\Omega$ to $V^+/2$		7	10 <b>12</b>	
	Output Swing Low, (measured from $V^-$ )	$R_L = 2\text{ k}\Omega$ to $V^+/2$		26	32 <b>43</b>	mV
		$R_L = 10\text{ k}\Omega$ to $V^+/2$		6	11 <b>14</b>	

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
$I_O$	Output Short Circuit Current	Sourcing, $V_{OUT} = V_{CM}$ , $V_{IN} = 100\text{ mV}$	25 <b>20</b>	28		mA
		Sinking, $V_{OUT} = V_{CM}$ , $V_{IN} = -100\text{ mV}$	28 <b>20</b>	31		
$I_S$	Supply Current	LMV851		0.42	0.50 <b>0.58</b>	mA
		LMV852		0.79	0.90 <b>1.06</b>	
		LMV854		1.54	1.67 <b>1.99</b>	
SR	Slew Rate (Note 7)	$A_V = +1$ , $V_{OUT} = 1\text{ V}_{PP}$ , 10% to 90%		4.5		V/ $\mu$ s
GBW	Gain Bandwidth Product			8		MHz
$\Phi_m$	Phase Margin			62		deg
$e_n$	Input-Referred Voltage Noise	$f = 1\text{ kHz}$		11		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 10\text{ kHz}$		10		
$i_n$	Input-Referred Current Noise	$f = 1\text{ kHz}$		0.005		$\text{pA}/\sqrt{\text{Hz}}$
$R_{OUT}$	Closed Loop Output Impedance	$f = 6\text{ MHz}$		400		$\Omega$
$C_{IN}$	Common-Mode Input Capacitance			11		pF
	Differential-Mode Input Capacitance			6		
THD+N	Total Harmonic Distortion + Noise	$f = 1\text{ kHz}$ , $A_V = 1$ , $BW = >500\text{ kHz}$		0.006		%

## 5V Electrical Characteristics (Note 4)

Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ , and  $R_L = 10\text{ k}\Omega$  to  $V^+/2$ .

**Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
$V_{OS}$	Input Offset Voltage			$\pm 0.26$ (Note 9)	$\pm 1$ <b><math>\pm 1.2</math></b>	mV
$TCV_{OS}$	Input Offset Voltage Drift (Note 10)			$\pm 0.4$ (Note 9)	$\pm 2$	$\mu\text{V}/^\circ\text{C}$
$I_B$	Input Bias Current (Note 10)			0.1	10 <b>500</b>	pA
$I_{OS}$	Input Offset Current			1		pA
CMRR	Common Mode Rejection Ratio	$-0.2\text{V} \leq V_{CM} \leq V^+ - 1.2\text{V}$	77 <b>76</b>	94 (Note 9)		dB
PSRR	Power Supply Rejection Ratio	$2.7\text{V} \leq V^+ \leq 5.5\text{V}$ , $V_{OUT} = 1\text{V}$	75 <b>74</b>	93 (Note 9)		dB
EMIRR	EMI Rejection Ratio, IN+ and IN- (Note 8)	$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 400\text{ MHz}$		64		dB
		$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 900\text{ MHz}$		76		
		$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 1800\text{ MHz}$		84		
		$V_{RFpeak} = 100\text{ mV}_P$ ( $-20\text{ dBV}_P$ ), $f = 2400\text{ MHz}$		89		
CMVR	Input Common-Mode Voltage Range	CMRR $\geq 77\text{ dB}$	-0.2		3.8	V

Symbol	Parameter	Conditions	Min (Note 6)	Typ (Note 5)	Max (Note 6)	Units
<a href="#">查询"LMV851MG"供应商</a>						
$A_{VOL}$	Large Signal Voltage Gain (Note 11)	$R_L = 2\text{ k}\Omega$ , $V_{OUT} = 0.15\text{V to } 2.5\text{V}$ , $V_{OUT} = 4.85\text{V to } 2.5\text{V}$	105 <b>102</b>	118		dB
		$R_L = 10\text{ k}\Omega$ , $V_{OUT} = 0.1\text{V to } 2.5\text{V}$ , $V_{OUT} = 4.9\text{V to } 2.5\text{V}$	105 <b>102</b>	120		
$V_O$	Output Swing High, (measured from $V^+$ )	$R_L = 2\text{ k}\Omega$ to $V^+/2$		34	39 <b>47</b>	mV
		$R_L = 10\text{ k}\Omega$ to $V^+/2$		7	11 <b>13</b>	
	Output Swing Low, (measured from $V^-$ )	$R_L = 2\text{ k}\Omega$ to $V^+/2$		31	38 <b>50</b>	mV
		$R_L = 10\text{ k}\Omega$ to $V^+/2$		7	12 <b>15</b>	
$I_O$	Output Short Circuit Current	Sourcing, $V_{OUT} = V_{CM}$ , $V_{IN} = 100\text{ mV}$	60 <b>48</b>	65		mA
		Sinking, $V_{OUT} = V_{CM}$ , $V_{IN} = -100\text{ mV}$	58 <b>44</b>	62		
$I_S$	Supply Current	LMV851		0.43	0.52 <b>0.60</b>	mA
		LMV852		0.82	0.93 <b>1.09</b>	
		LMV854		1.59	1.73 <b>2.05</b>	
SR	Slew Rate (Note 7)	$A_V = +1$ , $V_{OUT} = 2\text{ V}_{PP}$ , 10% to 90%		4.5		V/ $\mu$ s
GBW	Gain Bandwidth Product			8		MHz
$\Phi_m$	Phase Margin			64		deg
$e_n$	Input-Referred Voltage Noise	$f = 1\text{ kHz}$		11		nV/ $\sqrt{\text{Hz}}$
		$f = 10\text{ kHz}$		10		
$i_n$	Input-Referred Current Noise	$f = 1\text{ kHz}$		0.005		pA/ $\sqrt{\text{Hz}}$
$R_{OUT}$	Closed Loop Output Impedance	$f = 6\text{ MHz}$		400		$\Omega$
$C_{IN}$	Common-Mode Input Capacitance			11		pF
	Differential-Mode Input Capacitance			6		
THD+N	Total Harmonic Distortion + Noise	$f = 1\text{ kHz}$ , $A_V = 1$ , $BW = >500\text{ kHz}$		0.003		%

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics Tables.

**Note 2:** Human Body Model, applicable std. MIL-STD-883, Method 3015.7. Machine Model, applicable std. JESD22-A115-A (ESD MM std. of JEDEC) Field-Induced Charge-Device Model, applicable std. JESD22-C101-C (ESD FICDM std. of JEDEC).

**Note 3:** The maximum power dissipation is a function of  $T_{J(MAX)}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{J(MAX)} - T_A) / \theta_{JA}$ . All numbers apply for packages soldered directly onto a PC board.

**Note 4:** Electrical table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device.

**Note 5:** Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not guaranteed on shipped production material.

**Note 6:** Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlations using statistical quality control (SQC) method.

**Note 7:** Number specified is the slower of positive and negative slew rates.

**Note 8:** The EMI Rejection Ratio is defined as  $EMIRR = 20\log(V_{RFpeak}/\Delta V_{OS})$ .




**Note 9:** The typical value is calculated by applying absolute value transform to the distribution, then taking the statistical average of the resulting distribution

**Note 10:** This parameter is guaranteed by design and/or characterization and is not tested in production.

**Note 11:** The specified limits represent the lower of the measured values for each output range condition.

Connection Diagrams

[查询"LMV851MG"供应商](#)

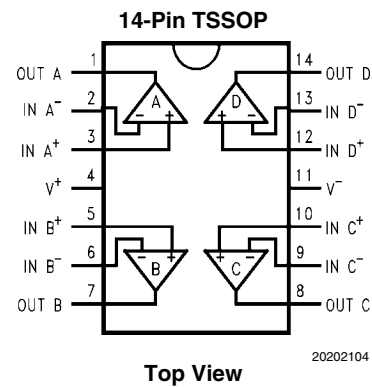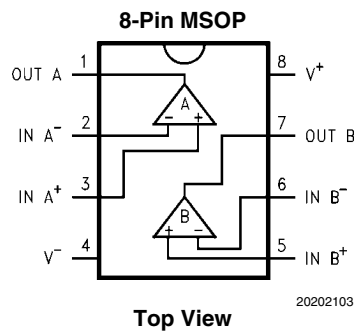


Ordering Information

Package	Part Number	Package Marking	Transport Media	NSC Drawing
5-Pin SC70	LMV851MG	A98	1k Units Tape and Reel	MAA05A
	LMV851MGX		3k Units Tape and Reel	
8-Pin MSOP	LMV852MM	AB5A	1k Units Tape and Reel	MUA08A
	LMV852MMX		3.5k Units Tape and Reel	
14-Pin TSSOP	LMV854MT	LMV854MT	94 Units/Rail	MTC14
	LMV854MTX		2.5k Units Tape and Reel	


# Typical Performance Characteristics

查询"LMV851MG"供应商


At  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$ ,  $V_S = 3.3\text{V}$ , unless otherwise specified.

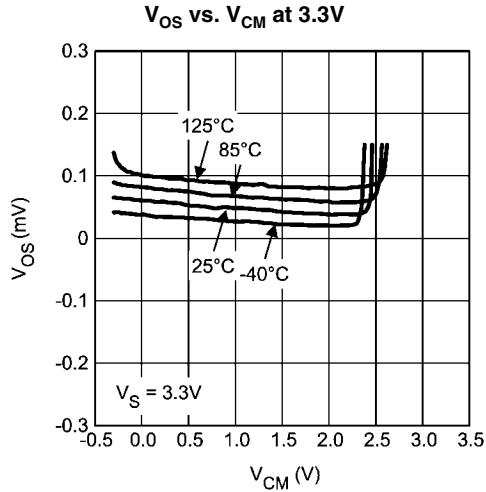


20202110

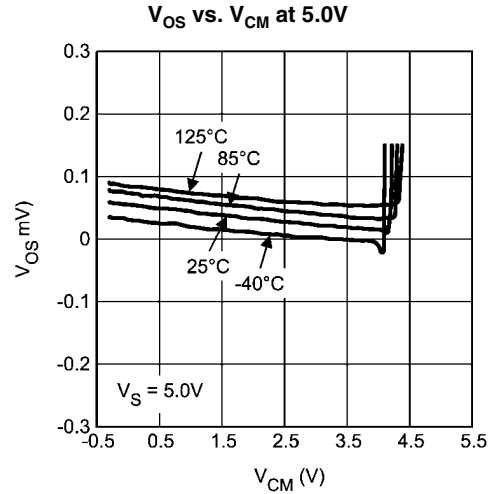


20202111

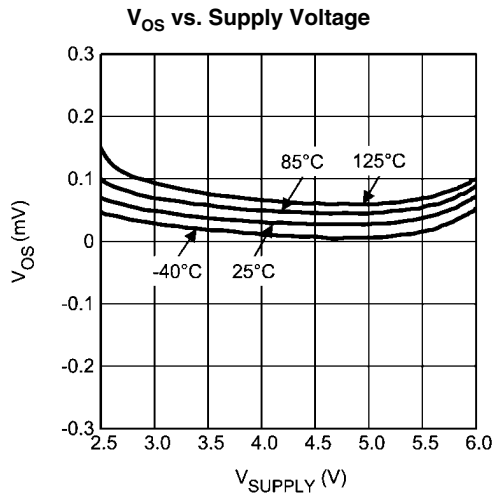


20202112

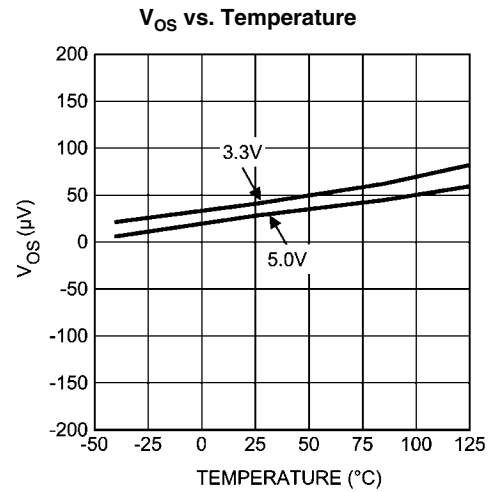

20202113

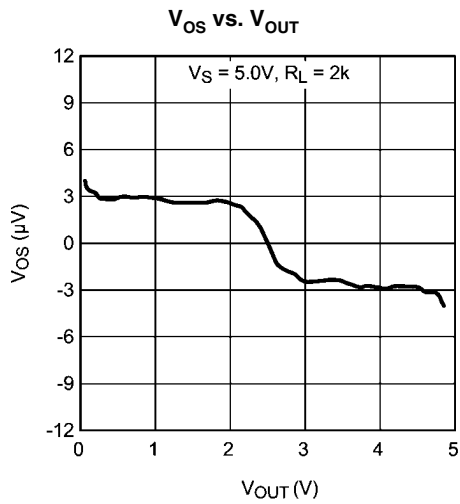


20202114

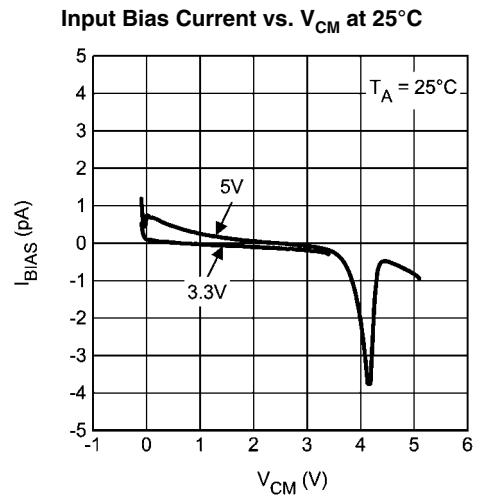


20202115

Input Bias Current vs.  $V_{CM}$  at 85°C  
[查询"LMV851MG"供应商](#)

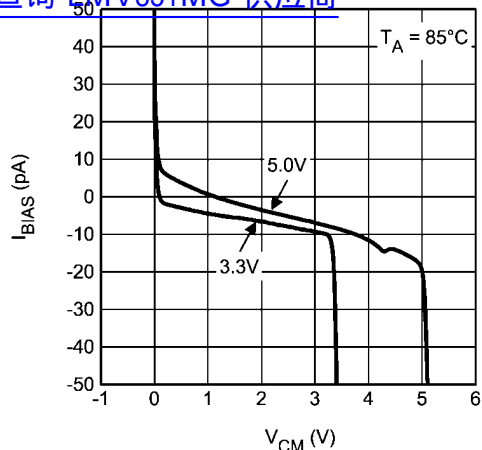


20202116

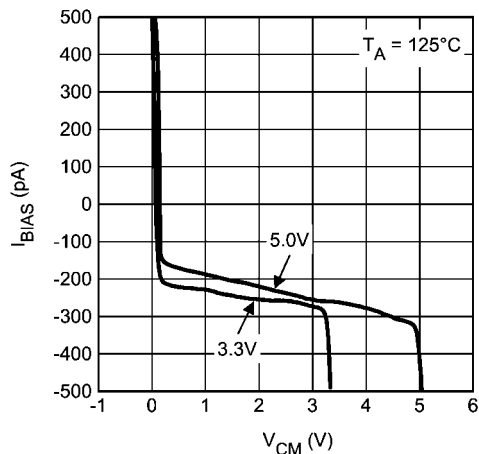Input Bias Current vs.  $V_{CM}$  at 125°C


20202117

Supply Current vs. Supply Voltage Single LMV851

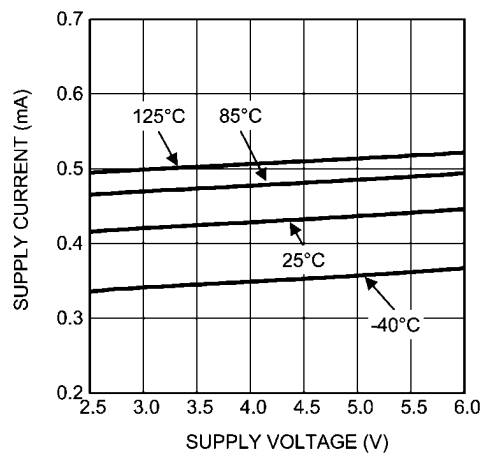


20202118

Supply Current vs. Supply Voltage Dual LMV852

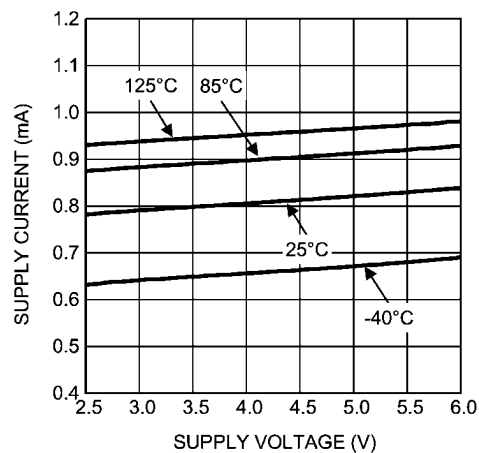


20202119

Supply Current vs. Supply Voltage Quad LMV854

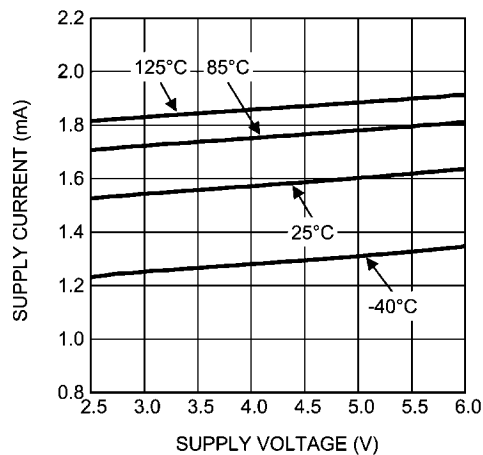


20202120

Supply Current vs. Temperature Single LMV851

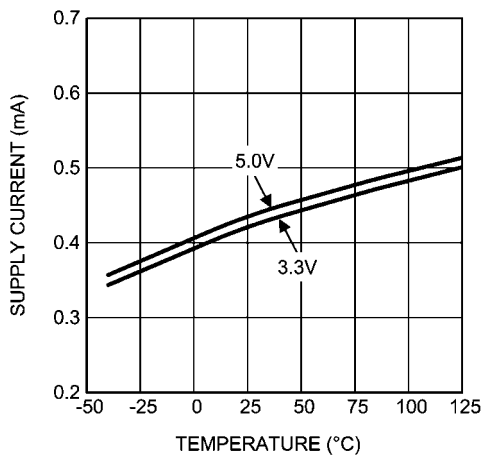


20202121


Supply Current vs. Temperature Dual LMV852  
[查询"LMV851MG"供应商](#)

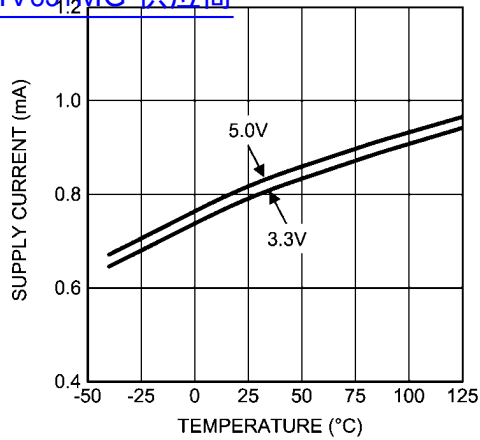


Supply Current vs. Temperature Quad LMV854

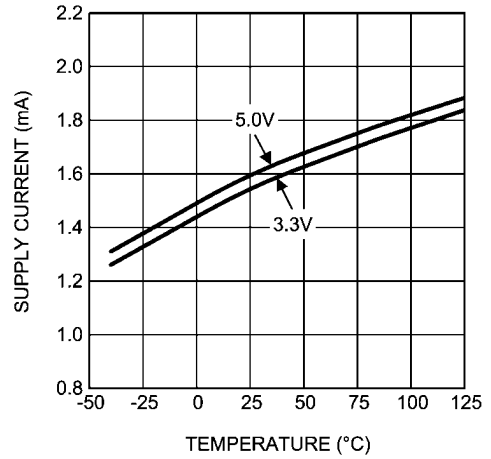


Sinking Current vs. Supply Voltage

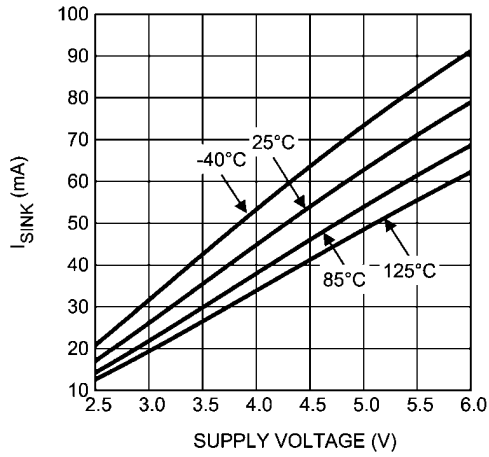


Sourcing Current vs. Supply Voltage

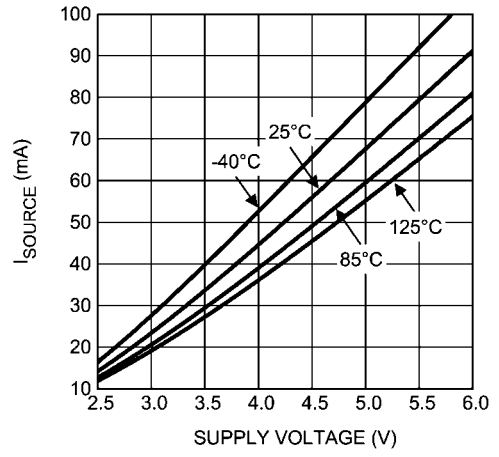

Output Swing High vs. Supply Voltage  $R_L = 2\text{ k}\Omega$

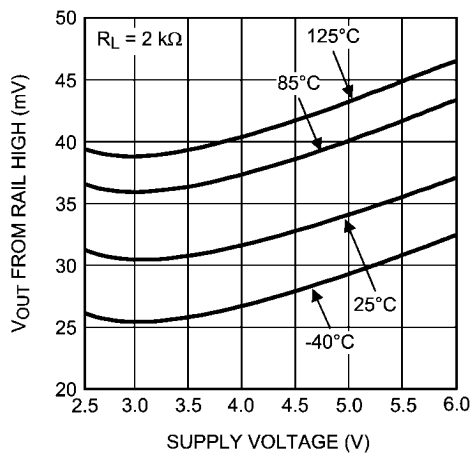


Output Swing High vs. Supply Voltage  $R_L = 10\text{ k}\Omega$

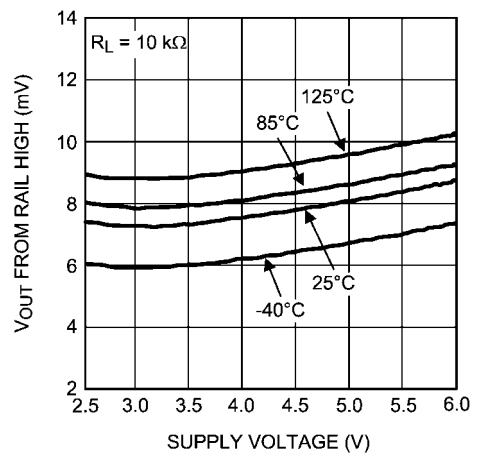




Output Swing Low vs. Supply Voltage  $R_L = 2\text{ k}\Omega$

查询"LMV851MG"供应商

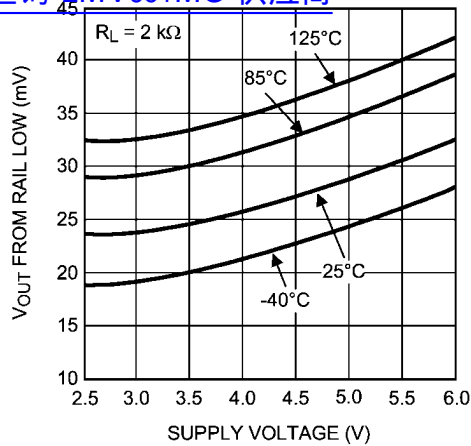


20202128

Output Swing Low vs. Supply Voltage  $R_L = 10\text{ k}\Omega$

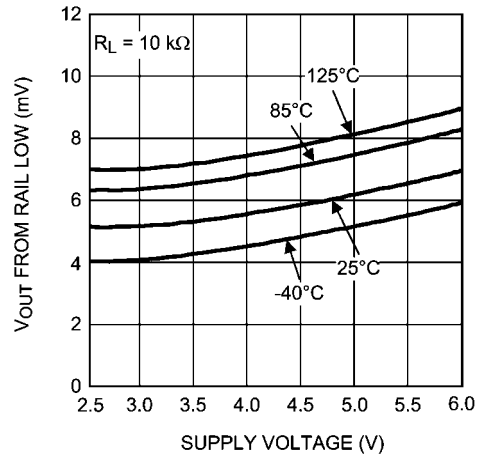


20202129

Output Voltage Swing vs. Load Current at 3.3V

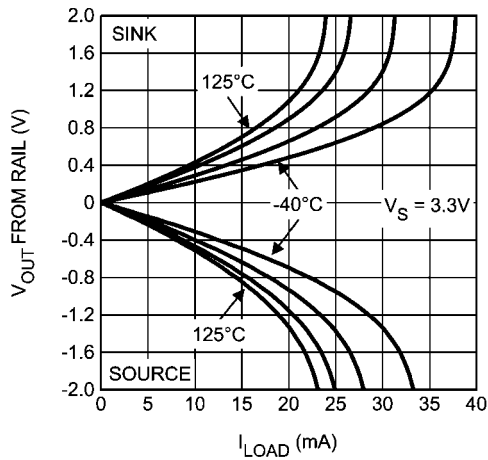


20202155

Output Voltage Swing vs. Load Current at 5.0V

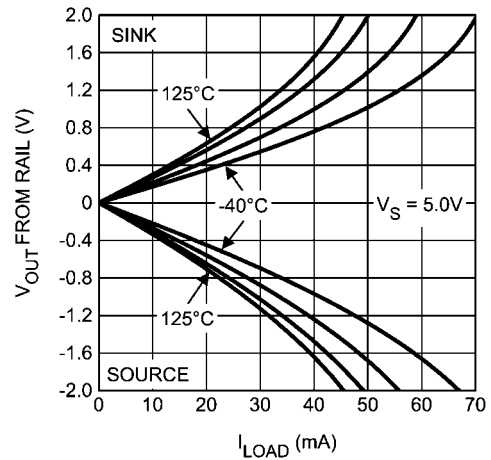


20202156

Open Loop Frequency Response vs. Temperature

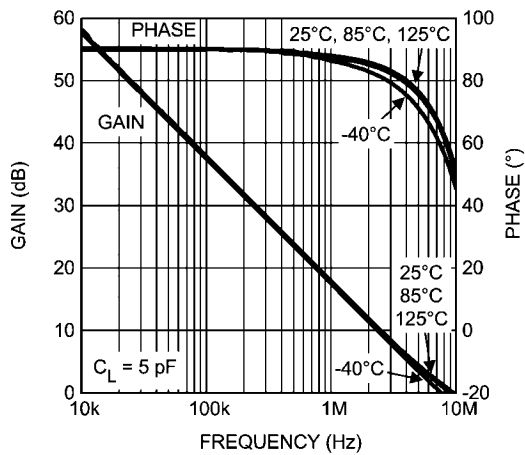


20202131

Open Loop Frequency Response vs. Load Conditions

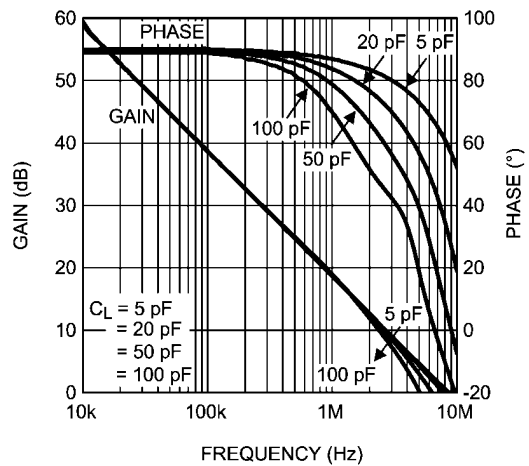


20202132


查询"LMV851MG"供应商

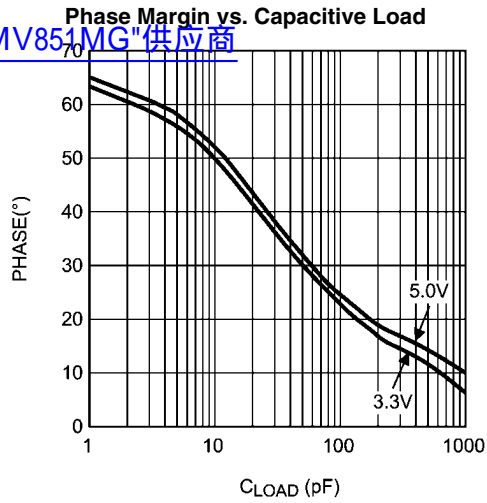


20202133

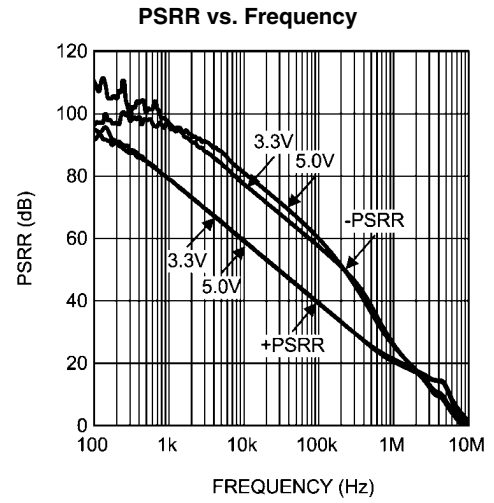

20202135

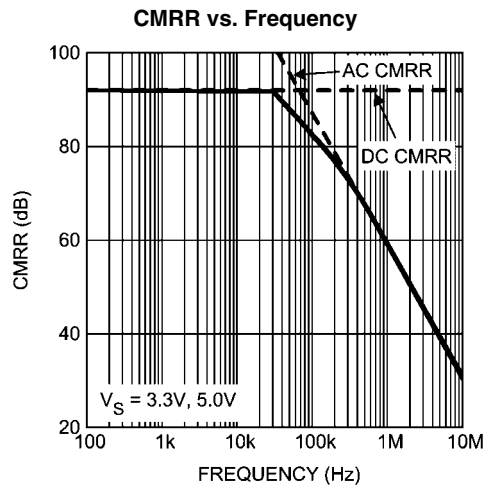


20202136

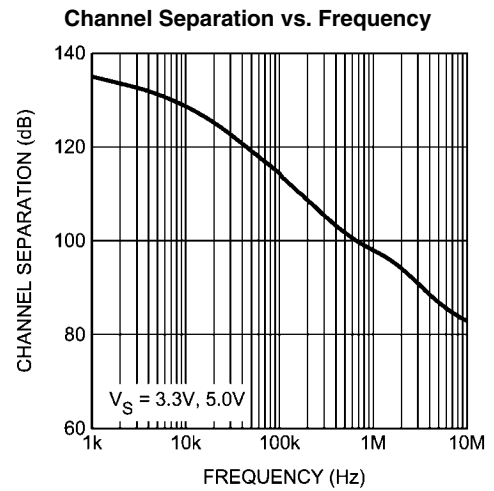


20202137

Large Signal Step Response with Gain = 1

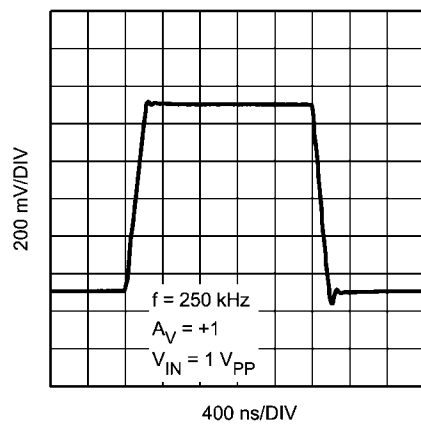


20202138

Large Signal Step Response with Gain = 10

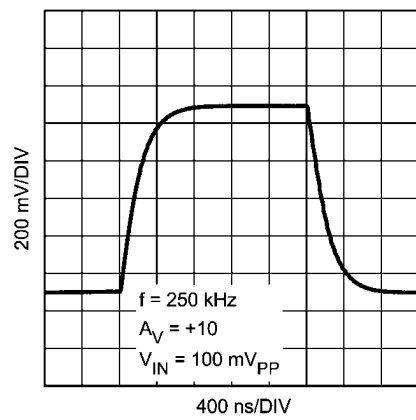


20202139

Small Signal Step Response with Gain = 1  
[查询"LMV851MG"供应商](#)

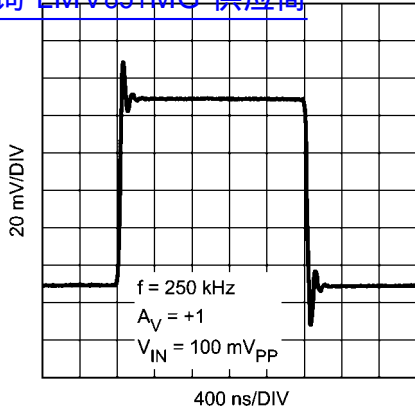


20202140

Small Signal Step Response with Gain = 10

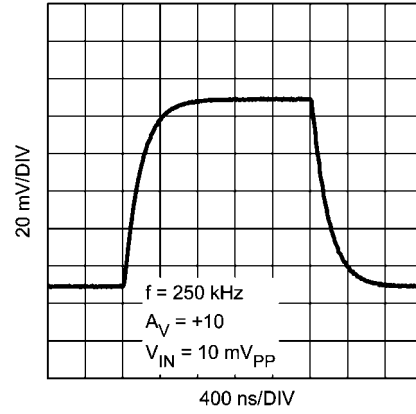


20202141

Slew Rate vs. Supply Voltage

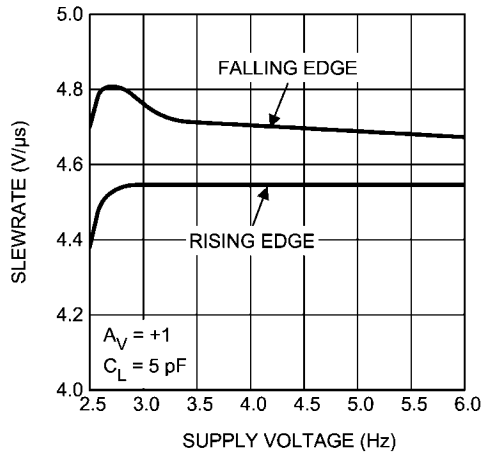


20202142

Overshoot vs. Capacitive Load

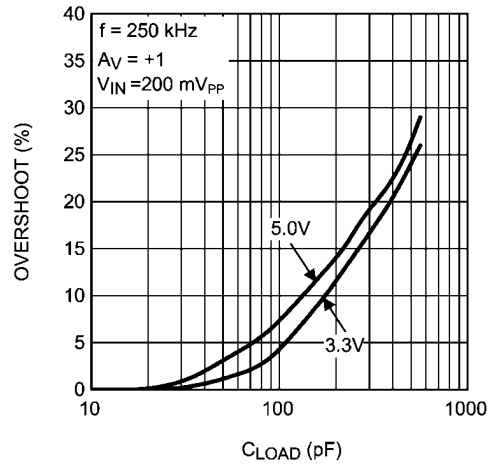


20202143

Input Voltage Noise vs. Frequency

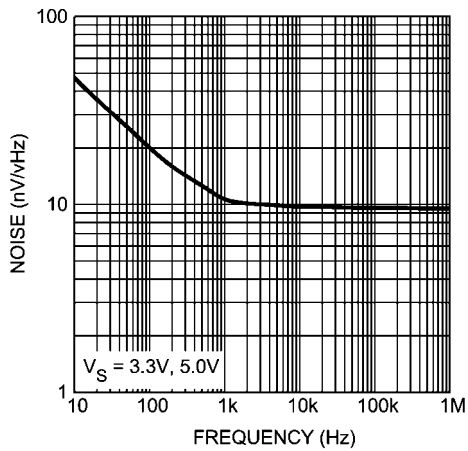


20202144

THD+N vs. Frequency

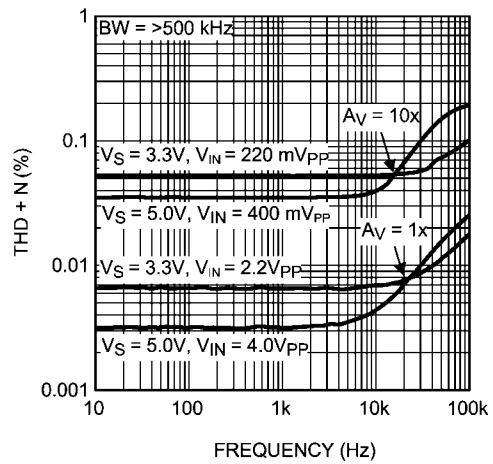


20202145


查询"LMV851MG"供应商

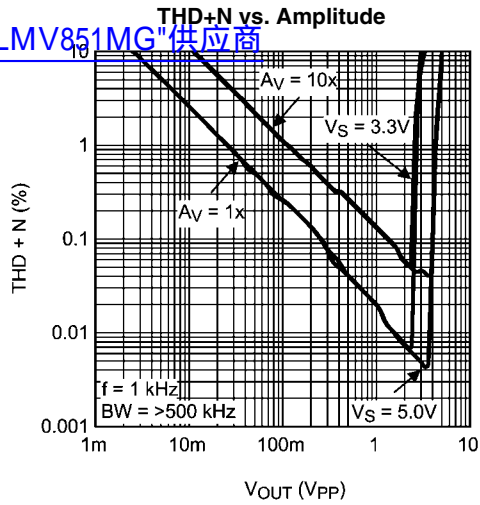


20202146

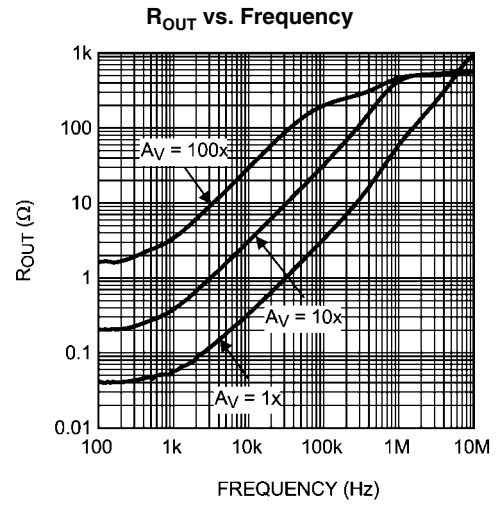


20202148

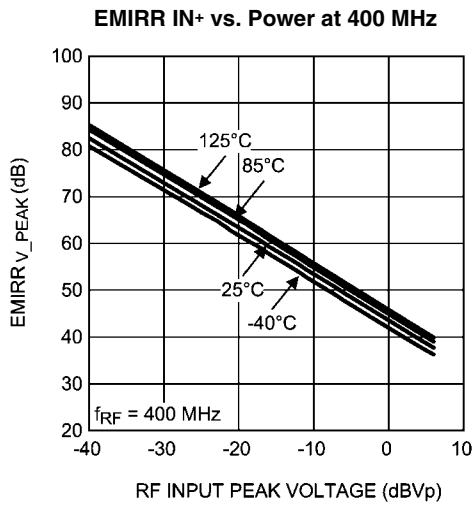


20202149

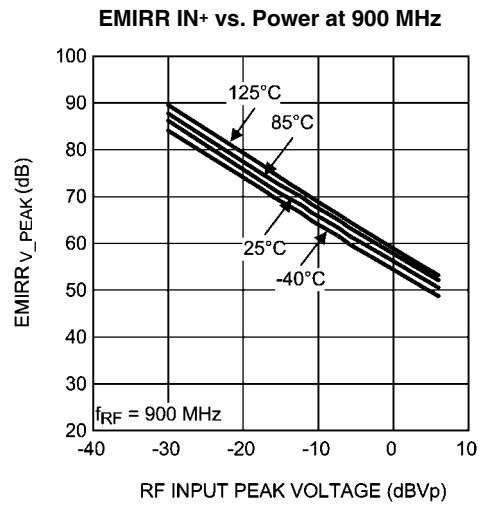


20202150

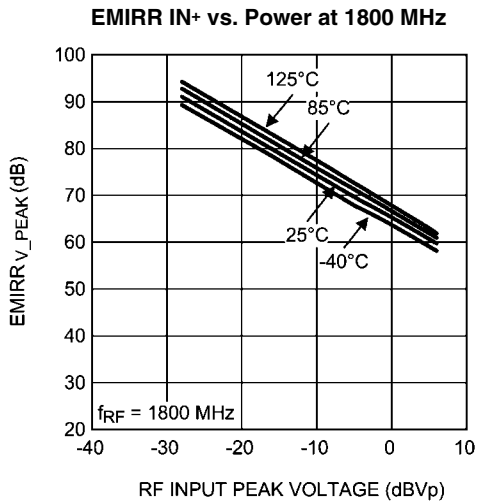


20202151

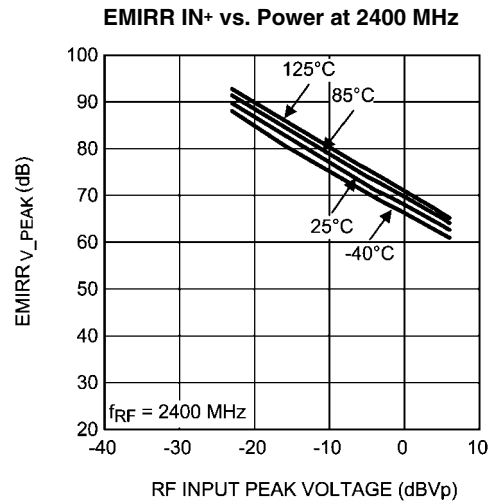

20202152

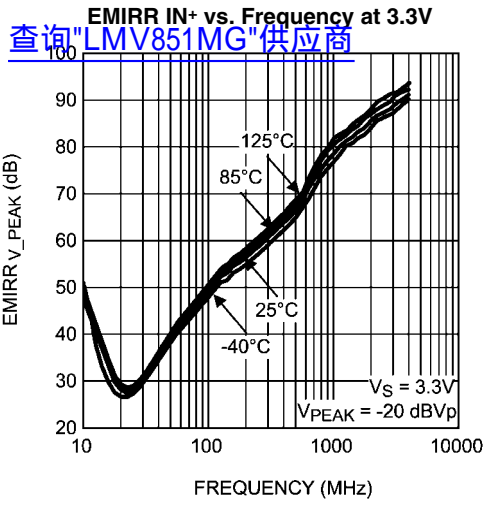

20202153

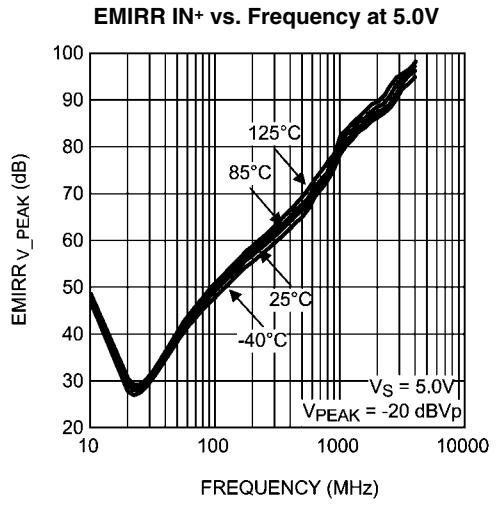

20202154

## Application Information

查询"LMV851MG"供应商

### INTRODUCTION

The LMV851/LMV852/LMV854 are operational amplifiers with very good specifications, such as low offset, low noise and a rail-to-rail output. These specifications make the LMV851/LMV852/LMV854 great choices to use in areas such as medical and instrumentation. The low supply current is perfect for battery powered equipment. The small packages, SC-70 package for the LMV851, the MSOP package for the dual LMV852 and the TSSOP package for the quad LMV854, make any of these parts a perfect choice for portable electronics. Additionally, the EMI hardening makes the LMV851/LMV852 or LMV854 a must for almost all op amp applications. Most applications are exposed to Radio Frequency (RF) signals such as the signals transmitted by mobile phones or wireless computer peripherals. The LMV851/LMV852/LMV854 will effectively reduce disturbances caused by RF signals to a level that will be hardly noticeable. This again reduces the need for additional filtering and shielding. Using this EMI resistant series of op amps will thus reduce the number of components and space needed for applications that are affected by EMI, and will help applications, not yet identified as possible EMI sensitive, to be more robust for EMI.

### INPUT CHARACTERISTICS

The input common mode voltage range of the LMV851/LMV852/LMV854 includes ground, and can even sense well below ground. The CMRR level does not degrade for input levels up to 1.2V below the supply voltage. For a supply voltage of 5V, the maximum voltage that should be applied to the input for best CMRR performance is thus 3.8V.

When not configured as unity gain, this input limitation will usually not degrade the effective signal range. The output is rail-to-rail and therefore will introduce no limitations to the signal range.


The typical offset is only 0.26 mV, and the  $TCV_{OS}$  is 0.4  $\mu V/^{\circ}C$ , specifications close to precision op amps.

### CMRR MEASUREMENT

The CMRR measurement results may need some clarification. This is because different setups are used to measure the AC CMRR and the DC CMRR.

The DC CMRR is derived from  $\Delta V_{OS}$  versus  $\Delta V_{CM}$ . This value is stated in the tables, and is tested during production testing.

The AC CMRR is measured with the test circuit shown in Figure 1.

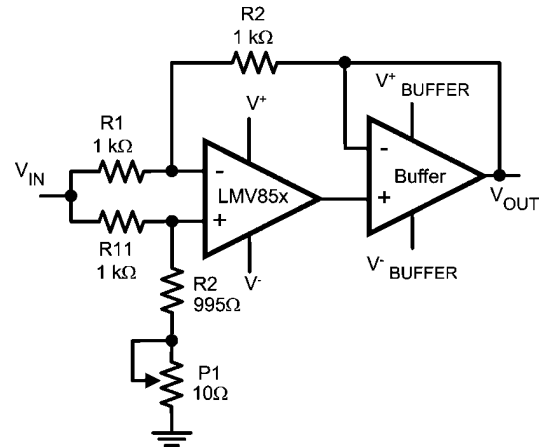


20202164

FIGURE 1. AC CMRR Measurement Setup

The configuration is largely the usually applied balanced configuration. With potentiometer P1, the balance can be tuned to compensate for the DC offset in the DUT. The main difference is the addition of the buffer. This buffer prevents the open-loop output impedance of the DUT from affecting the balance of the feedback network. Now the closed-loop output impedance of the buffer is a part of the balance. But as the closed-loop output impedance is much lower, and by careful selection of the buffer also has a larger bandwidth, the total effect is that the CMRR of the DUT can be measured much more accurately. The differences are apparent in the larger measured bandwidth of the AC CMRR.

One artifact from this test circuit is that the low frequency CMRR results appear higher than expected. This is because in the AC CMRR test circuit the potentiometer is used to compensate for the DC mismatches. So, mainly AC mismatch is all that remains. Therefore, the obtained DC CMRR from this AC CMRR test circuit tends to be higher than the actual DC CMRR based on DC measurements.

The CMRR curve in Figure 2 shows a combination of the AC CMRR and the DC CMRR.

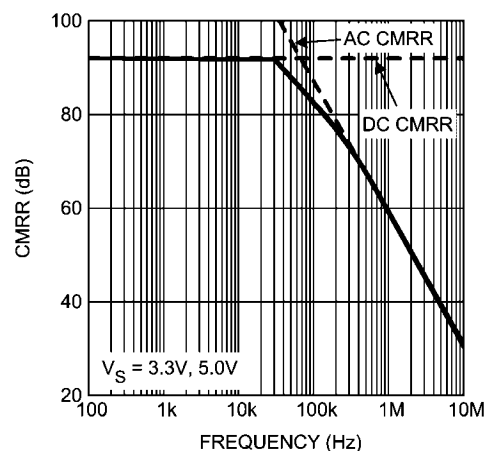

20202136

FIGURE 2. CMRR Curve

## OUTPUT CHARACTERISTICS

As already mentioned the output is rail-to-rail. When loading the output with a 10-k $\Omega$  resistor the maximum swing of the output is typically 7 mV from the positive and negative rail

The LMV851/LMV852/LMV854 can be connected as non-inverting unity gain amplifiers. This configuration is the most sensitive to capacitive loading. The combination of a capacitive load placed at the output of an amplifier along with the amplifier's output impedance creates a phase lag, which reduces the phase margin of the amplifier. If the phase margin is significantly reduced, the response will be under damped which causes peaking in the transfer and, when there is too much peaking, the op amp might start oscillating. The LMV851/LMV852/LMV854 can directly drive capacitive loads up to 200 pF without any stability issues. In order to drive heavier capacitive loads, an isolation resistor,  $R_{ISO}$ , should be used, as shown in Figure 3. By using this isolation resistor, the capacitive load is isolated from the amplifier's output, and hence, the pole caused by  $C_L$  is no longer in the feedback loop. The larger the value of  $R_{ISO}$ , the more stable the amplifier will be. If the value of  $R_{ISO}$  is sufficiently large, the feedback loop will be stable, independent of the value of  $C_L$ . However, larger values of  $R_{ISO}$  result in reduced output swing and reduced output current drive.

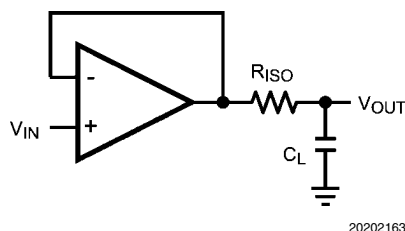


FIGURE 3. Isolating Capacitive Load

## EMIRR

With the increase of RF transmitting devices in the world, the electromagnetic interference (EMI) between those devices and other equipment becomes a bigger challenge. The LMV851/LMV852/LMV854 are EMI hardened op amps which are specifically designed to overcome electromagnetic interference. Along with EMI hardened op amps, the EMIRR parameter is introduced to unambiguously specify the EMI performance of an op amp. This section presents an overview of EMIRR. A detailed description on this specification for EMI hardened op amps can be found in Application Note AN-1698.

The dimensions of an op amp IC are relatively small compared to the wavelength of the disturbing RF signals. As a result the op amp itself will hardly receive any disturbances. The RF signals interfering with the op amp are dominantly received by the PCB and wiring connected to the op amp. As a result the RF signals on the pins of the op amp can be represented by voltages and currents. This representation significantly simplifies the unambiguous measurement and specification of the EMI performance of an op amp.

RF signals interfere with op amps via the non-linearity of the op amp circuitry. This non-linearity results in the detection of the so called out-of-band signals. The obtained effect is that the amplitude modulation of the out-of-band signal is down-converted into the base band. This base band can easily overlap with the band of the op amp circuit. As an example Figure 4 depicts a typical output signal of a unity-gain connected op amp in the presence of an interfering RF signal.

Clearly the output voltage varies in the rhythm of the on-off keying of the RF carrier.

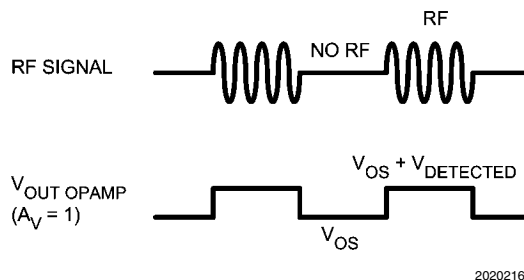


FIGURE 4. Offset Voltage Variation Due to an Interfering RF Signal

## EMIRR Definition

To identify EMI hardened op amps, a parameter is needed that quantitatively describes the EMI performance of op amps. A quantitative measure enables the comparison and the ranking of op amps on their EMI robustness. Therefore the EMI Rejection Ratio (EMIRR) is introduced. This parameter describes the resulting input-referred offset voltage shift of an op amp as a result of an applied RF carrier (interference) with a certain frequency and level. The definition of EMIRR is given by:


$$\text{EMIRR}_{V_{RF\_PEAK}} = 20 \log \left( \frac{V_{RF\_PEAK}}{\Delta V_{OS}} \right)$$

In which  $V_{RF\_PEAK}$  is the amplitude of the applied un-modulated RF signal (V) and  $\Delta V_{OS}$  is the resulting input-referred offset voltage shift (V). The offset voltage depends quadratically on the applied RF level, and therefore, the RF level at which the EMIRR is determined should be specified. The standard level for the RF signal is 100 mV<sub>p</sub>. Application Note AN-1698 addresses the conversion of an EMIRR measured for an other signal level than 100 mV<sub>p</sub>. The interpretation of the EMIRR parameter is straightforward. When two op amps have an EMIRR which differ by 20 dB, the resulting error signals when used in identical configurations, differs by 20 dB as well. So, the higher the EMIRR, the more robust the op amp.

## Coupling an RF Signal to the IN+ Pin

Each of the op amp pins can be tested separately on EMIRR. In this section the measurements on the IN+ pin (which, based on symmetry considerations, also apply to the IN- pin) are discussed. In Application Note AN-1698 the other pins of the op amp are treated as well. For testing the IN+ pin the op amp is connected in the unity gain configuration. Applying the RF signal is straightforward as it can be connected directly to the IN+ pin. As a result the RF signal path has a minimum of components that might affect the RF signal level at the pin. The circuit diagram is shown in Figure 5. The PCB trace from RF<sub>IN</sub> to the IN+ pin should be a 50 $\Omega$  stripline in order to match the RF impedance of the cabling and the RF generator. On the PCB a 50 $\Omega$  termination is used. This 50 $\Omega$  resistor is also used to set the bias level of the IN+ pin to ground level. For determining the EMIRR, two measurements are needed: one is measuring the DC output level when the RF signal is off; and the other is measuring the DC output level when the RF signal is switched on. The difference of the two DC levels is the output voltage shift as a result of the RF signal. As the op amp is in the unity gain configuration, the input referred offset

voltage shift corresponds one-to-one to the measured output voltage shift.  
[查询"LMV851MG"供应商](#)

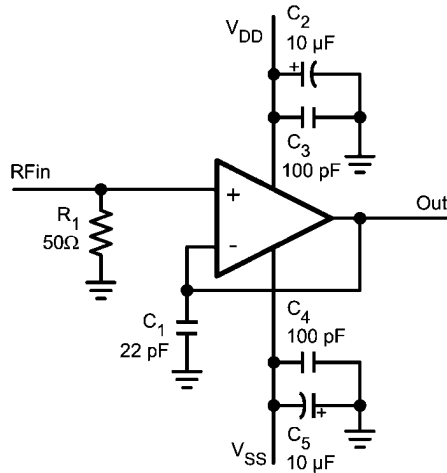


20202167

FIGURE 5. Circuit for Coupling the RF Signal to IN+

### Cell Phone Call

The effect of electromagnetic interference is demonstrated in a setup where a cell phone interferes with a pressure sensor application (Figure 7). This application needs two op amps and therefore a dual op amp is used. The experiment is performed on two different dual op amps: a typical standard op amp and the LMV852, EMI hardened dual op amp. The op amps are placed in a single supply configuration. The cell phone is placed on a fixed position a couple of centimeters from the op amps.

When the cell phone is called, the PCB and wiring connected to the op amps receive the RF signal. Subsequently, the op amps detect the RF voltages and currents that end up at their pins. The resulting effect on the output of the second op amp is shown in Figure 6.

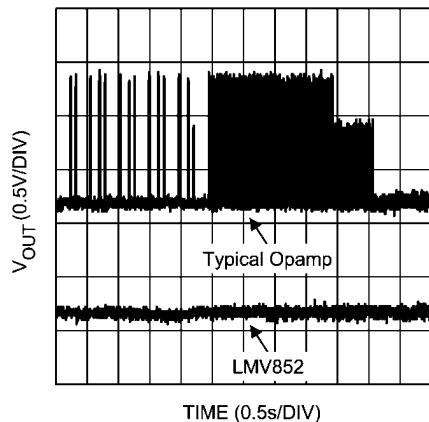

20202168

FIGURE 6. Comparing EMI Robustness

The difference between the two types of dual op amps is clearly visible. The typical standard dual op amp has an output shift (disturbed signal) larger than 1V as a result of the RF signal transmitted by the cell phone. The LMV852, EMI hardened op amp does not show any significant disturbances.

### DECOUPLING AND LAYOUT

Care must be given when creating a board layout for the op amp. For decoupling the supply lines it is suggested that 10 nF capacitors be placed as close as possible to the op amp. For single supply, place a capacitor between V+ and V-. For dual supplies, place one capacitor between V+ and the board ground, and a second capacitor between ground and V-. Even with the LMV851/LMV852/LMV854 inherent hardening against EMI, it is still recommended to keep the input traces short and as far as possible from RF sources. Then the RF signals entering the chip are as low as possible, and the remaining EMI can be, almost, completely eliminated in the chip by the EMI reducing features of the LMV851/LMV852/LMV854.

### PRESSURE SENSOR APPLICATION

The LMV851/LMV852/LMV854 can be used for pressure sensor applications. Because of their low power the LMV851/LMV852/LMV854 are ideal for portable applications, such as blood pressure measurement devices, or portable barometers. This example describes a universal pressure sensor that can be used as a starting point for different types of sensors and applications.

#### Pressure Sensor Characteristics

The pressure sensor used in this example functions as a Wheatstone bridge. The value of the resistors in the bridge change when pressure is applied to the sensor. This change of the resistor values will result in a differential output voltage, depending on the sensitivity of the sensor and the applied pressure. The difference between the output at full scale pressure and the output at zero pressure is defined as the span of the pressure sensor. A typical value for the span is 100 mV. A typical value for the resistors in the bridge is 5 kΩ. Loading of the resistor bridge could result in incorrect output voltages of the sensor. Therefore the selection of the circuit configuration, which connects to the sensor, should take into account a minimum loading of the sensor.

#### Pressure Sensor Example

The configuration shown in Figure 7 is simple, and is very useful for the read out of pressure sensors. With two op amps in this application, the dual LMV852 fits very well.

The op amp configured as a buffer and connected at the negative output of the pressure sensor prevents the loading of the bridge by resistor R2. The buffer also prevents the resistors of the sensor from affecting the gain of the following gain stage. Given the differential output voltage  $V_S$  of the pressure sensor, the output signal of this op amp configuration,  $V_{OUT}$ , equals:

$$V_{OUT} = \frac{V_{DD}}{2} - \frac{V_S}{2} \left( 1 + 2 \times \frac{R1}{R2} \right)$$

To align the pressure range with the full range of an ADC, the power supply voltage and the span of the pressure sensor are needed. For this example a power supply of 5V is used and the span of the sensor is 100 mV.

When a 100Ω resistor is used for R2, and a 2.4 kΩ resistor is used for R1, the maximum voltage at the output is 4.95V and the minimum voltage is 0.05V. This signal is covering almost the full input range of the ADC. Further processing can take place in the microprocessor following the ADC.



## [查询"LMV851MG"供应商](#)

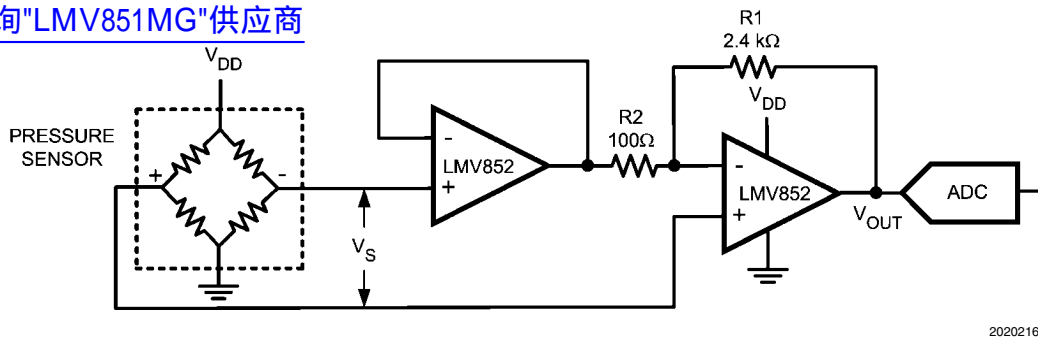


FIGURE 7. Pressure Sensor Application

### THERMOCOUPLE AMPLIFIER

The following circuit is a typical example for a thermocouple amplifier application using an LMV851/LMV852, or LMV854. A thermocouple converts a temperature into a voltage. This signal is then amplified by the LMV851/LMV852, or LMV854. An ADC can convert the amplified signal to a digital signal. For further processing the digital signal can be processed by a microprocessor and used to display or log the temperature. The temperature data can for instance be used in a fabrication process.

#### Characteristics of a Thermocouple

A thermocouple is a junction of two different metals. These metals produce a small voltage that increases with temperature.

The thermocouple used in this application is a K-type thermocouple. A K-type thermocouple is a junction between Nickel-Chromium and Nickel-Aluminum. This is one of the most commonly used thermocouples. There are several reasons for using the K-type thermocouple, these include: temperature range, the linearity, the sensitivity, and the cost.

A K-type thermocouple has a wide temperature range. The range of this thermocouple is from approximately  $-200^{\circ}\text{C}$  to approximately  $1200^{\circ}\text{C}$ , as can be seen in Figure 8. This covers the generally used temperature ranges.

Over the main part of the temperature range the output voltage depends linearly on the temperature. This is important for easily converting the measured signal levels to a temperature reading.

The K-type thermocouple has good sensitivity when compared to many other types; the sensitivity is about  $41\text{ }\mu\text{V}/^{\circ}\text{C}$ . Lower sensitivity requires more gain and makes the application more sensitive to noise.

In addition, a K-type thermocouple is not expensive, many other thermocouples consist of more expensive materials or are more difficult to produce.

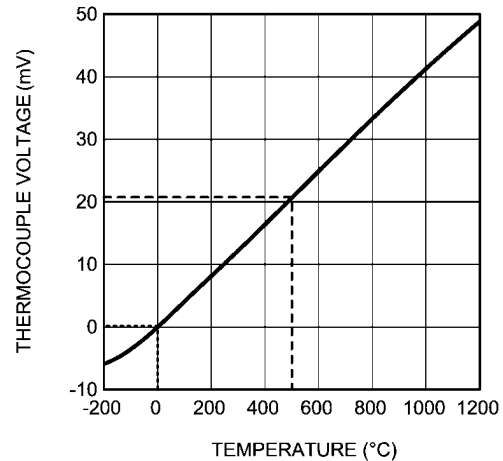


FIGURE 8. K-Type Thermocouple Response

#### Thermocouple Example

For this example, suppose the range of interest is  $0^{\circ}\text{C}$  to  $500^{\circ}\text{C}$ , and the resolution needed is  $0.5^{\circ}\text{C}$ . The power supply for both the LMV851/LMV852, or LMV854 and the ADC is 3.3V.

The temperature range of  $0^{\circ}\text{C}$  to  $500^{\circ}\text{C}$  results in a voltage range from 0 mV to 20.6 mV produced by the thermocouple. This is indicated in Figure 8 by the dotted lines.

To obtain the highest resolution, the full ADC range of 0 to 3.3V is used. The gain needed for the full range can be calculated as follows:

$$A_V = 3.3\text{V} / 0.0206\text{V} = 160$$

If  $R_G$  is  $2\text{ k}\Omega$ , then the value for  $R_F$  can be calculated for a gain of 160. Since  $A_V = R_F / R_G$ ,  $R_F$  can be calculated as follows:

$$R_F = A_V \times R_G = 160 \times 2\text{ k}\Omega = 320\text{ k}\Omega$$

To get a resolution of  $0.5^{\circ}\text{C}$ , the LSB of the ADC should be smaller than  $0.5^{\circ}\text{C} / 500^{\circ}\text{C} = 1/1000$ . A 10-bit ADC would be sufficient as this gives 1024 steps. A 10-bit ADC such as the two channel 10-bit ADC102S021 can be used.

### Unwanted Thermocouple Effect

查询"LMV851WG"供应商

At the points where the thermocouple wires are connected to the circuit, usually copper wires or traces, an unwanted thermocouple effect will occur.


At this connection, this could be the connector on a PCB, the thermocouple wiring forms a second thermocouple with the connector. This second thermocouple disturbs the measurements from the intended thermocouple.

Using an isothermal block as a reference enables correction for this unwanted thermocouple effect. An isothermal block is a good heat conductor. This means that the two thermocouple

connections both have the same temperature. The temperature of the isothermal block can be measured, and thereby the temperature of the thermocouple connections. This is usually called the cold junction reference temperature.

In the example, an LM35 is used to measure this temperature. This semiconductor temperature sensor can accurately measure temperatures from  $-55^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ .

The two channel ADC in this example also converts the signal from the LM35 to a digital signal. Now the microprocessor can compensate the amplified thermocouple signal, for the unwanted thermocouple effect.

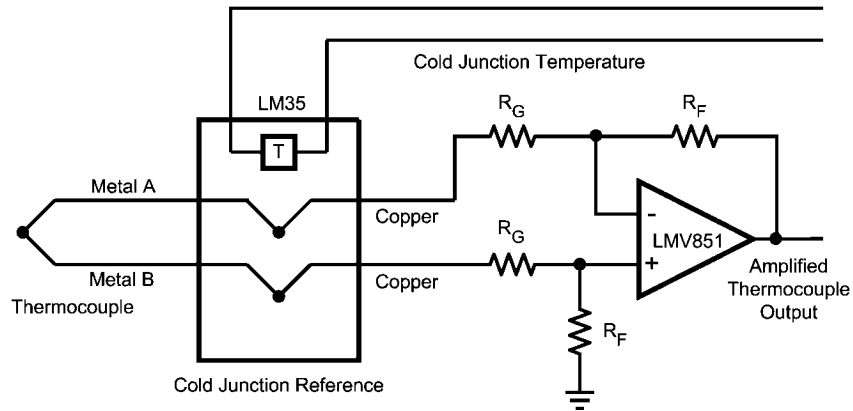



20202161

FIGURE 9. Thermocouple Read Out Circuit



# Physical Dimensions

inches (millimeters) unless otherwise noted

[查询"LMV851MG"供应商](#)

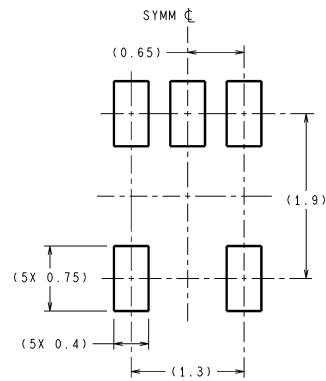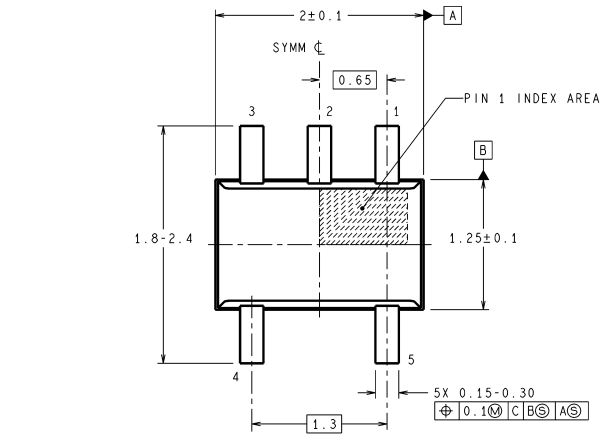



LAND PATTERN RECOMMENDATION

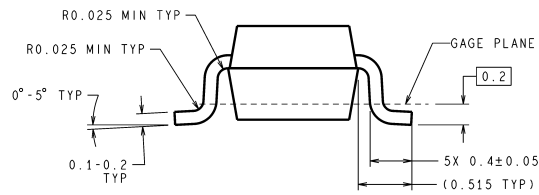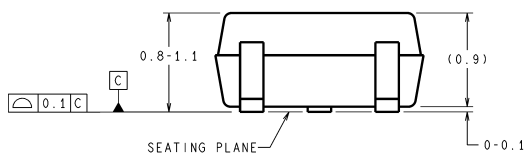



DIMENSIONS ARE IN MILLIMETERS  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

MAA05A (Rev D)

## 5-Pin SC70 NS Package Number MAA05A

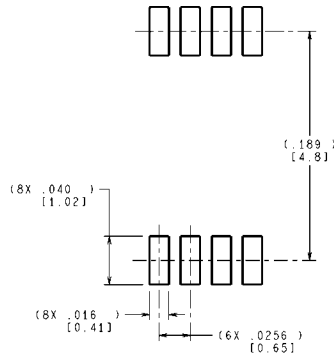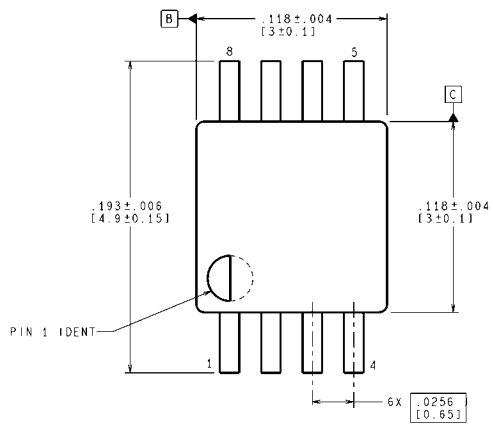

LAND PATTERN RECOMMENDATION

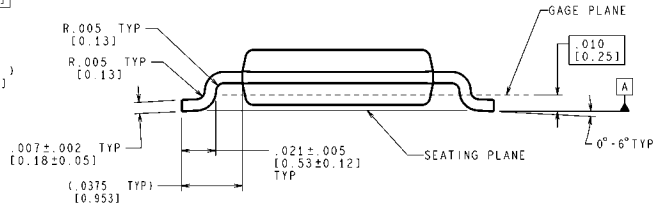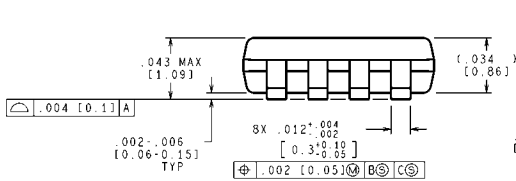


CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

MUA08A (Rev E)

## 8-Pin MSOP NS Package Number MUA08A

查询"LMV851M"供应商

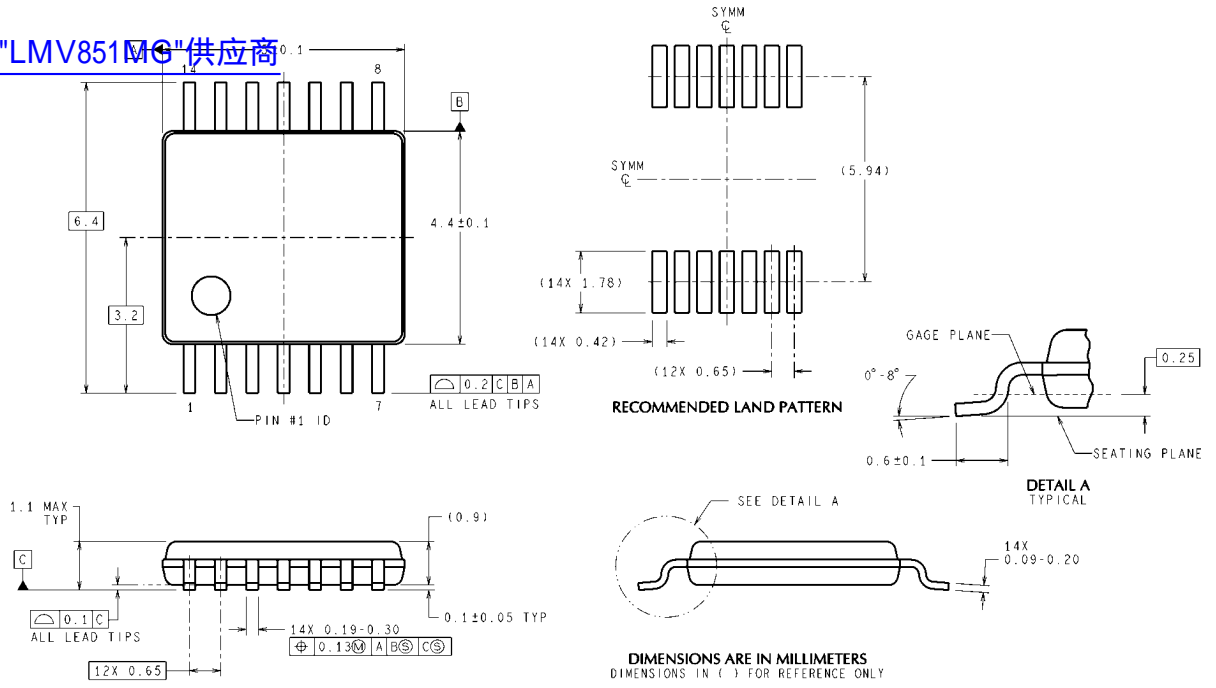

**14-Pin TSSOP**  
**NS Package Number MTC14**

MTC14 (Rev D)

## Notes

[查询"LMV851MG"供应商](#)

[查询"LMV851MG"供应商](#)

## Notes

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2007 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Customer  
Support Center**  
Email:  
[new.feedback@nsc.com](mailto:new.feedback@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Customer Support Center**  
Fax: +49 (0) 180-530-85-86  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
Deutsch Tel: +49 (0) 69 9508 6208  
English Tel: +49 (0) 870 24 0 2171  
Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor Asia  
Pacific Customer Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Customer Support Center**  
Fax: 81-3-5639-7507  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)  
Tel: 81-3-5639-7560