


SAW Bandpass Filter 251651B

1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- SMD Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

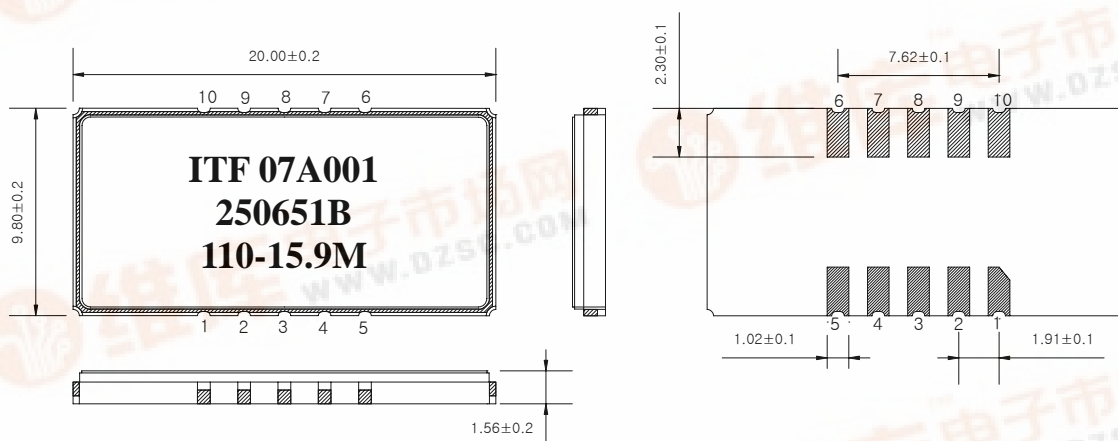

Package : S2098

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

| Pin Configuration | |
|-------------------|-------------|
| 10 | Input |
| 5 | Output |
| 1, 4 | Ground |
| 2,3,6,7,8,9 | Case ground |

| | | | | |
|--|---|-----------|-------------|-----|
| | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251651B | |
| | | Rev. Date | 2007-04-11 | |
| | | Rev. | NM7009-CS01 | 1/5 |

SAW Bandpass Filter 251651B

3. Specifications

Fo = 110.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

| | | Minimum | Typical | Maximum |
|--|--------|---------|---------|---------|
| Center Frequency | MHz | - | 110.0 | - |
| Insertion Loss | dB | - | 25.0 | 26.5 |
| 1dB Bandwidth | MHz | - | 15.85 | - |
| 3dB Bandwidth | MHz | 16.0 | 16.2 | - |
| 40dB Bandwidth | MHz | - | 17.65 | 18.0 |
| Amplitude Ripple (Fo +/- 7.5 MHz) | dB | - | 0.6 | 1.0 |
| Group Delay Variation (Fo +/- 7.5 MHz) | nsec | - | 30 | 100 |
| Absolute Delay | usec | - | 2.48 | - |
| Ultimate Rejection | dB | 50 | 55 | - |
| Temperature Coefficient of Frequency | ppm/°C | - | -72 | - |

Notes :


- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss

| | | | | |
|---|---|-----------|-------------|-----|
|  Integrated Technology Future | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251651B | |
| | | Rev. Date | 2007-04-11 | |
| | | Rev. | NM7009-CS01 | 2/5 |

SAW Bandpass Filter 251651B

4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

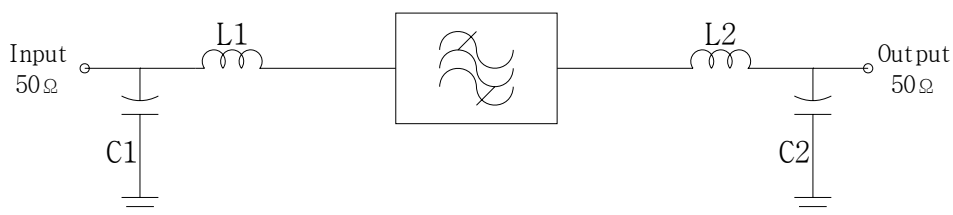

L1 = 39nH, L2 = 39nH, C1 = 27pF, C2 = 27pF


5. Marking Configuration

ITF¹⁾ 07A001²⁾

251651B³⁾

110⁴⁾ -15.9M⁵⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center Frequency
- 5) 1dB-Bandwidth

| | | | | |
|---|---|-----------|-------------|-----|
|  | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251651B | |
| | | Rev. Date | 2007-04-11 | |
| | | Rev. | NM7009-CS01 | 3/5 |

SAW Bandpass Filter 251651B







6. Typical Performance (at +25°C)

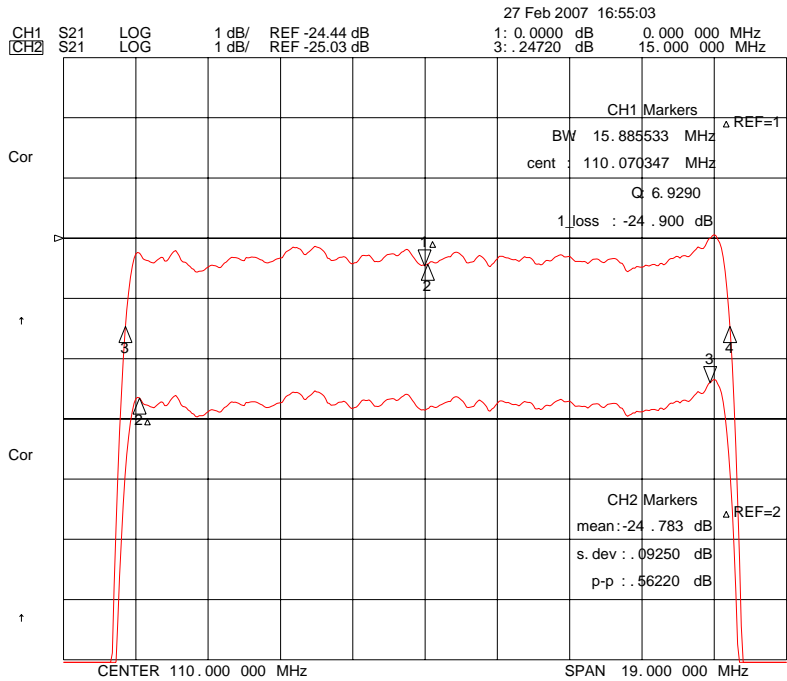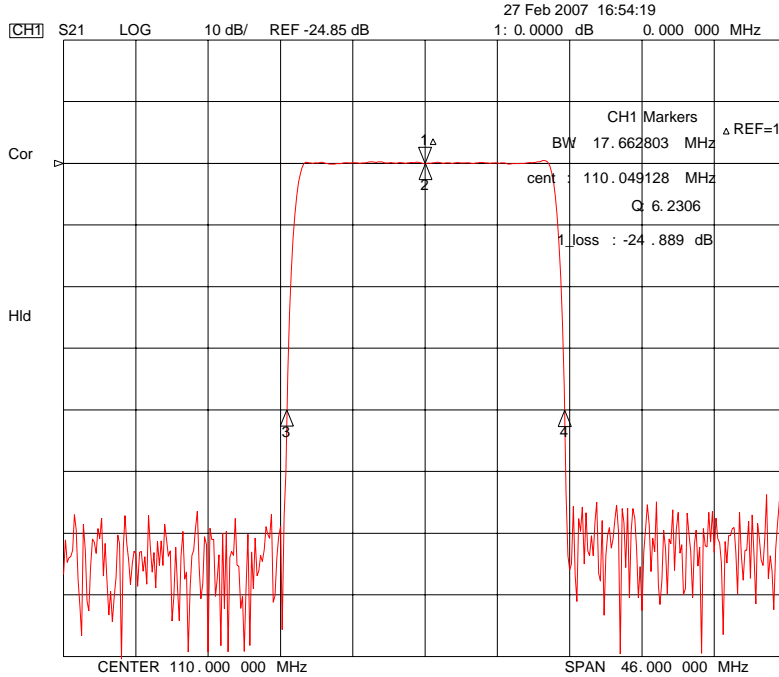

| | | | | |
|--|---|-----------|-------------|-----|
| | ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809 | Part No. | 251651B | |
| | | Rev. Date | 2007-04-11 | |
| | | Rev. | NM7009-CS01 | 4/5 |

SAW Bandpass Filter 251651B

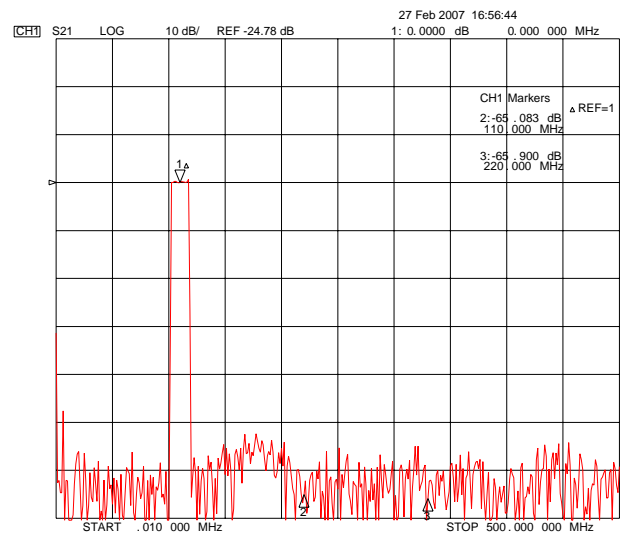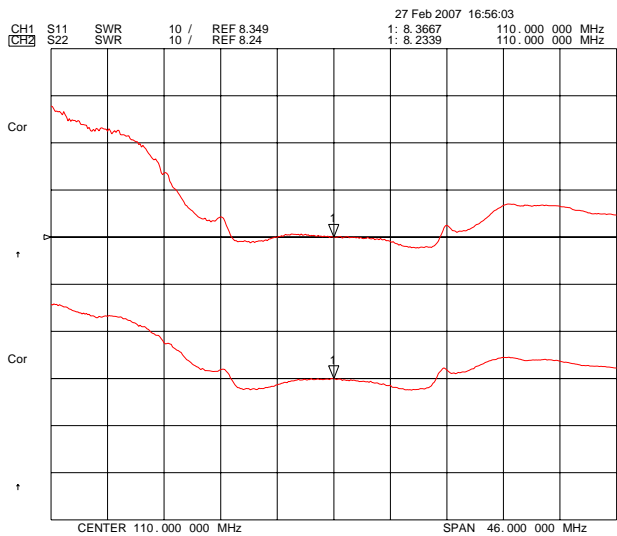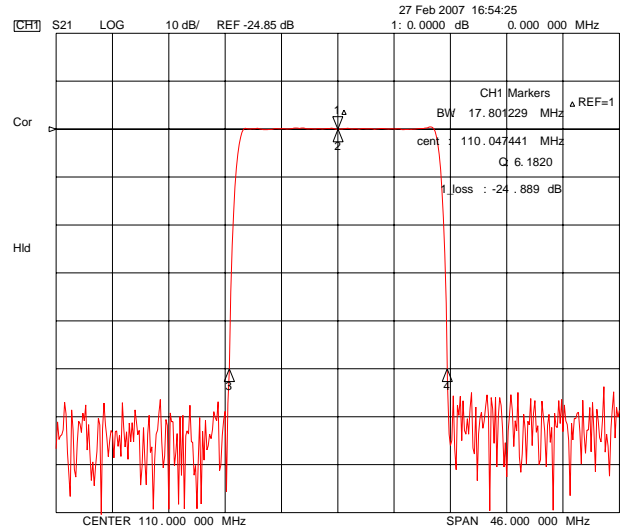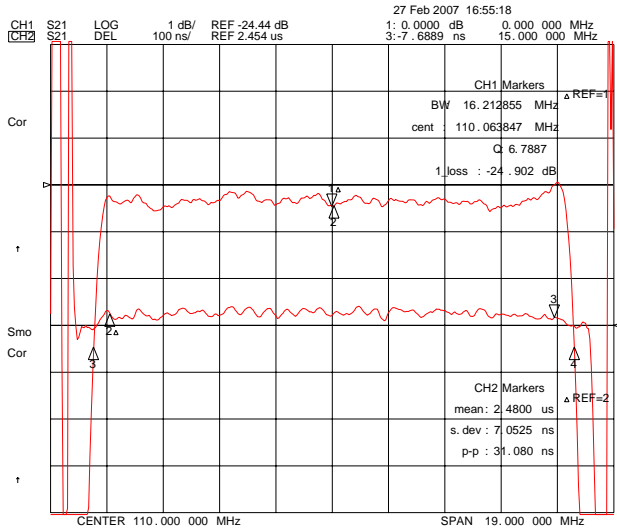

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

| | | |
|-----------|-------------|-----|
| Part No. | 251651B | |
| Rev. Date | 2007-04-11 | |
| Rev. | NM7009-CS01 | 5/5 |