
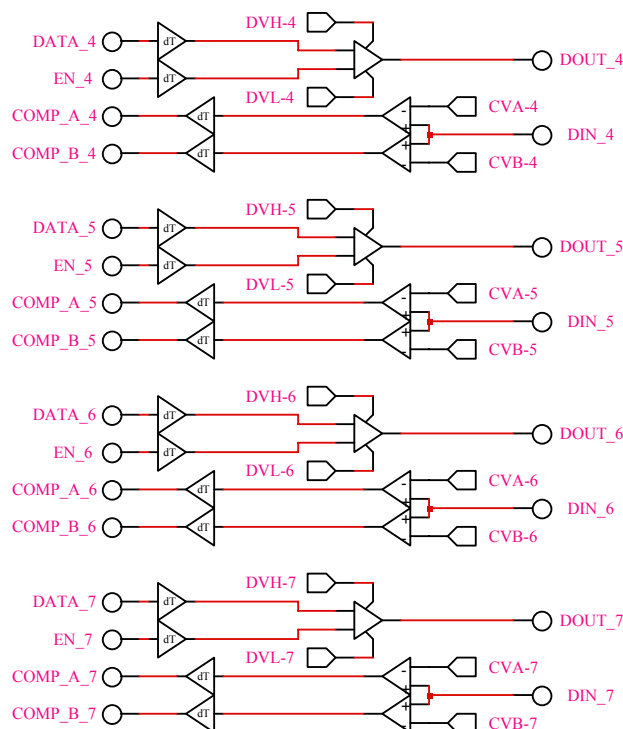


System on a Chip, 50 MHz Octal Pin Electronics w/ PMU

[Get Full Datasheet](#)

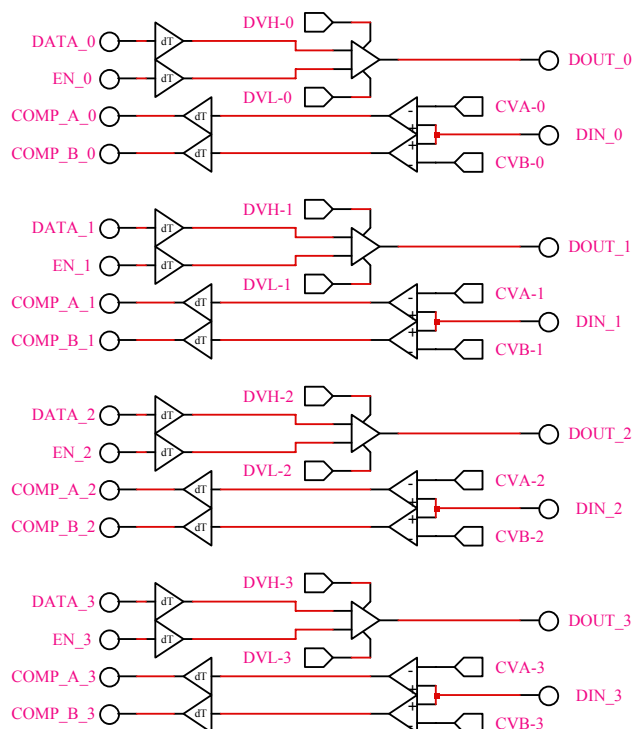

50 MHz

10 ns Minimum Pulse Width

Pin Electronics Driver

- 2 Level Driver w/ On Chip Buffers
- 8V Driver Output Swings
- Extremely Low Leakage over a 16V HiZ Range

Pin Electronics Comparator

- Extremely Low Leakage over a 16V Input Range
- 16V Comparator Input Voltage Range

Per Chip PMU

- FV, FI, MV, MI
- 8 Current Ranges
(32 mA, 8 mA, 2 mA, 512 μ A, 128 μ A, 32 μ A, 8 μ A, 2 μ A)
- 12V Super Voltage Capability

Deskew

- Propagation Delay Adjustment (up to 20 ns range)
- Falling Edge Adjustment (up to ± 5 ns range)
- Auto Calibration via PLL

On Chip DC Levels

- 4 Levels / Channel
- 8 Levels / Central PMU
- 16 Bits per Level
- 16 Bit per Level Offset Correction
- 16 Bit per level Gain Correction

3 Bit Serial CPU Port

- Load Internal Registers and Memory
- Read Back Internal States

Flexible Digital Inputs and Outputs

- Adjustable threshold for high speed inputs
- 50 Ω / 100 Ω input termination options
- 50 Ω series terminated high speed comparator outputs

Package / Power Dissipation

- 128 Lead, 14 mm X 20 mm, MQFP w/ Heat Slug
- $P_{dq} \leq 500$ mW / Channel; $P_{dq} \leq 4.0$ W / Chip

Product Status	Revision Date
Production	11 / 20 / 07