

***THIS DOCUMENT IS FOR MAINTENANCE
PURPOSES ONLY AND IS NOT
RECOMMENDED FOR NEW DESIGNS***

MA9000 Series

SILICON-ON-SAPPHIRE RADIATION HARD GATE ARRAYS

The logic building block for the GPS double level metal CMOS/SOS gate arrays is a four transistor 'cell-unit' equivalent in size to a 2 input NAND gate. Back to back cell-units as illustrated, organised in rows, form the core of the array

The interconnection patterns that cause groups of cell units within a row, to become defined logic cells, and the models which are used to simulate these cells, are stored as software in LIBRARIES. Cells up to the complexity of, say, multiple bit shift registers are treated in this way.

Higher complexity functions are described by MACROS as the interconnection of defined cells. Macros are 'hard', 'soft', or 'firm' according to the constraints that are applied to the distribution of the component cells within the array and whether the full function is simulated by a model or by the additive effects of the component cells.

FEATURES

- Radiation Hard to 1MRad(Si)
- High SEU Immunity, Latch-Up Free
- Double-Level-Metal CMOS/SOS Technology
- 2.5 Micron Design Rules
- Typical Gate Delay 1.2nS With 2 Loads, 60MHz Toggle Speeds
- Comprehensive Library of Logic Cells and Logic Function Building Macros
- 100% Automatic Place and Route for Typically 70% Utilisation

ARRAY OPTIONS

Array Type	Cell Units	Bonding Pads		
		I/O	Power	Total
MA9007	748	46	2	48
MA9024	2484	80	4	84
MA9040	4048	102	4	106

Each cell-unit is equivalent to a 2 input NAND gate.

Any I/O site may be configured as a power pad to give flexible bonding options, but to standardise testing, preferred positions exist.

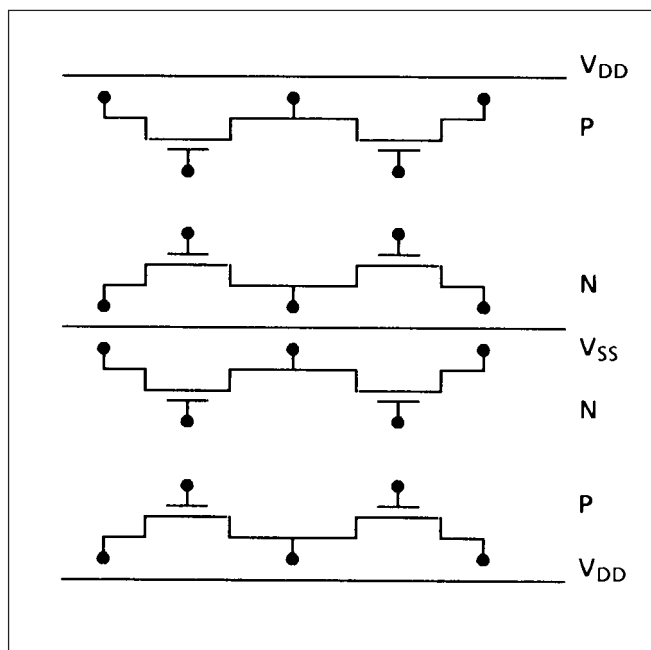


Figure 1: Cell Unit

MA9000 Series

CHARACTERISTICS & RATINGS

Symbol	Parameter	Min.	Max.	Units
V_{DD}	Supply voltage	-0.5	7	V
V_I	Input voltage	-0.3	$V_{DD} + 0.3$	V
T_A	Operating temperature	-55	125	°C
T_S	Storage temperature	-65	150	°C

Stresses above those listed may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions, or at any other condition above those indicated in the operations section of this specification, is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 1: Absolute Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
V_{DD}	Supply voltage	-	4.5	5.0	5.5	V
V_{IH1}	TTL input high voltage	-	2.0	-	-	V
V_{IL1}	TTL input low voltage	-	-	-	0.8	V
V_{IH2}	CMOS input high voltage	-	80	-	-	% V_{DD}
V_{IL2}	CMOS input low voltage	-	-	-	20	% V_{DD}
V_{OH1}	TTL output high voltage	$I_{OH} = -2mA$	2.4	-	-	V
V_{OL1}	TTL output low voltage	$I_{OL} = 5mA$	-	-	0.4	V
V_{OH2}	CMOS output high voltage	$I_{OH} = -4mA$	90	-	-	% V_{DD}
V_{OL2}	CMOS output low voltage	$I_{OL} = 4mA$	-	-	10	% V_{DD}
I_L	Input leakage current	-	-	-	10	μA
I_{OZ}	Output leakage current	Tristate Output	-	-	30	μA
I_{DD}	Power supply current	-	-	0.1	*	mA

$V_{DD} = 5V \pm 10\%$, over full operating temperature.

* Dependent on array type.

Table 2: Electrical Characteristics

AC CHARACTERISTICS

Cell Name	Function	O/P Edge	Inherent Delay	Per 1pF Load*	Units
NOP	Push/Pull Output Buffer	Rising Falling	0.5 0.3	0.4 0.2	ns
NOR2	2 Input NOR	Rising Falling	1.6 0.8	13.6 5.0	ns
RDT	Reset D Type	Rising CK - QB Falling CK - QB Data Set-up time Data Hold time	4.6 7.8 7.1 4.4	13.7 13.6 - -	ns

* 1pF is equivalent to fanout of 5 standard gates

Table 3: Electrical Characteristics

PROPAGATION DELAY

Worst case maximum propagation delays for 5 volts working and 25°C are stated in the cell libraries. These are for the data change or state change which gives the greatest delay. Typical process figures under the same conditions are generally 60% of those listed.

Use the following normalised graphs to obtain conversion factors to predict delays at any other working temperature or voltage:

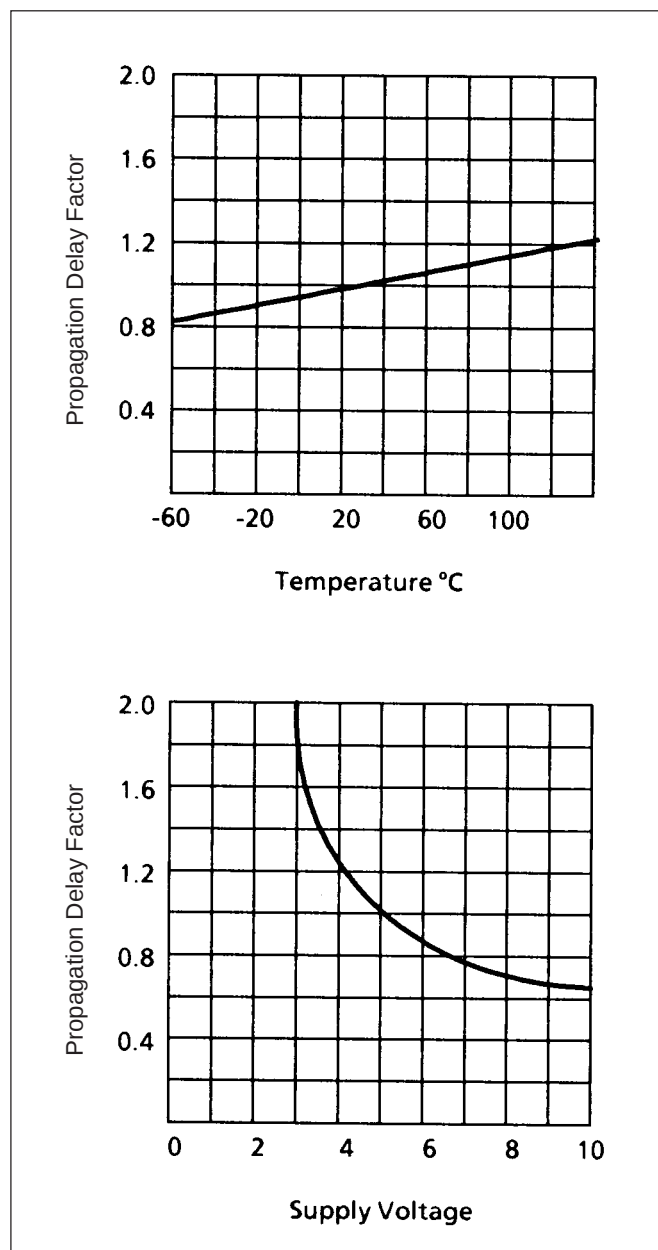


Figure 2: Propagation Delay vs Temperature & Propagation Delay vs Supply Voltage

PACKAGE OPTIONS

	MA9007 196 x 129	MA9024 247 x 240	MA9040 301 x 302
DIL14	X		
DIL16	X		
DIL20	X		
DIL24	X	X	
DIL28	X	X	
DIL40	X	X	
DIL48		X	X
DIL64		X	X
LCC28	X		
LCC40	X	X	
LCC44	X		
LCC48		X	X
LCC68		X	X
LCC84		X	X
FPK16	X		
FPK20	X		
FPK24	X		
FPK28	X	X	
FPK64		X	X
FPK68		X	X
FPK84		X	X
PGA68		X	X
PGA84		X	X
PGA120		X	X
PGA144		X	X

DIL = Dual in line
LCC = Leadless chip carrier
FPK = Leaded flatpack
PGA = Pin grid array

These are standard packages. If your package requirement is not shown above, discuss other options with an applications engineer.

MA9000 Series

RADIATION TOLERANCE

For product procured to guaranteed total dose radiation levels, each wafer lot will be approved when all sample devices from each lot pass the total dose radiation test.

The sample devices will be subjected to the total dose radiation level (Cobalt-60 Source), defined by the ordering code, and must continue to meet the electrical parameters specified in the data sheet. Electrical tests, pre and post irradiation, will be read and recorded.

GPS can provide radiation testing compliant with MIL-STD-883C remote sensing method 1019 notice 5.

Total Dose (Function to specification)*	3x10 ⁵ Rad(Si)
Transient Upset (Stored data loss)	5x10 ¹⁰ Rad(Si)/sec
Transient Upset (Survivability)	>1x10 ¹² Rad(Si)/sec
Neutron Hardness (Function to specification)	>1x10 ¹⁵ n/cm ²
Single Event Upset**	<1x10 ⁻¹⁰ Errors/bit day
Latch Up	Not possible

* Other total dose radiation levels available on request

** Worst case galactic cosmic ray upset - interplanetary/high altitude orbit

Table 4: Radiation Hardness Parameters

CELL LIBRARY QUICK GUIDE

Cell Name	Function	Cell Units	Cell Name	Function	Cell Units
COMBINATIONAL GATES			NOR12	12 input NOR	8
			NOR16	16 input NOR	11
INV	Inverter	1	OR2	2 input OR	2
DUALINV	Dual inverter	1	OR3	3 input OR	2
INVB	Fast inverter	1	OR4	4 Input OR	3
INVC	Super fast inverter	2	ANDNOR	2 + 2 input AND/NOR	2
BUFF	Non-inverting buffer	1	ANDOR	2 + 2 input AND/OR	3
BUFFB	Fast non-inverting buffer	2	ORNAND	2 + 2 OR/NAND	2
BUFFC	Super fast non-inverting buffer	3	ORAND	2 + 2 OR/AND	3
NAND2	2 input NAND	1	A2N01	2 + 1 Input AND/NOR	2
NAND2B	Fast 2 input NAND	2	A201	2 + 1 input AND/OR	2
NAND3	3 input NAND	2	02NA1	2 + 1 input OR/NAND	2
NAND4	4 input NAND	2	02A1	2 + 1 input OR/AND	2
NAND8	8 input NAND	6	EXNOR	Exclusive NOR	3
NAND12	12 input NAND	8	EXORN	Exclusive OR	3
NAND16	16 input NAND	11	SEL21NV	Select 1 of 2 (inverting)	3
AND2	2 input AND	2	SEL2	Select 1 of 2	3
AND3	3 input AND	2	SEL41NV	4 bit data selector (inverting)	6
AND4	4 input AND	3	SEL4	4 bit data selector	7
NOR2	2 input NOR	1			
NOR2B	Fast 2 input NOR	2			
NOR3	3 input NOR	2			
NOR4	4 input NOR	2			
NOR8	8 input NOR	6			

Cell Name	Function	Cell Units	Cell Name	Function	Cell Units
DECODERS			REGISTERS / SHIFT REGISTERS		
DEC2T4	2 to 4 line decoder	6	SHRx	Multibit (x = 2-8) serial register	16-46
DEC3T8	3 to 8 line decoder	11	RSHRx	Multibit (x = 2-8) serial reg. with reset	18-54
DEC4T16	4 to 16 line decider	40	DREGx	Multibit parallel register (x = 2-8)	8-22
			DREGTx	Multibit parallel register (x = 2-8) with tri-state outputs	12-36
ARITHMETIC			HPLSx	Half parallel loading shift registers (x = 2-8)	22-64
HAD	Half adder	5	INVERTING TRI-STATE BUFFERS		
FAD	Full adder	8	TRIBUFF	Tristate buffer (enable high)	2
FLAD	Fast look ahead adder	6	TRIBUFFL	Tristate buffer (enable low)	2
LAH2	2 bit look ahead unit	10	TRINV	Tristate inv buffer (enable high)	2
LAH3	3 bit look ahead unit	14	TRINVL	Tristate inv. buffer (enable low)	2
LAH4	4 bit look ahead unit	24			
ADD4	4 bit look ahead adder	50			
ADD8	8 bit look ahead adder	106			
SIMPLE LATCHES			INPUT OUTPUT AND PERIPHERAL CELLS		
NASR	NAND set reset-latch	3	DIP	Direct input (protection cicuit only)	
NOSR	NOR set-reset latch	3	PUP	Pull up (approx 30 Kohms)	
TRANSPARENT LATCHES			PDO	Pull down (approx 40 Kohms)	
DL	D-latch (Active low)	4	TSCHMITT	TTL compatible Schmitt	6
DLH	D-latch(Active high)	4	CSCHMITT	CMOS compatible Schmitt	6
SDL	Set D-latch	4	CMOSIN	CMOS buffer (non-inverting)	1
RDL	Reset D-latch	4	TTLIN	TTL buffer (non-inverting)	3
SRDL	Set/reset D-latch	5	NOP	Push/pull output buffer (inverting)	
EDGE TRIGGERED LATCHES			WNOP	Multiple NOP	
RETS	Latch with reset	7	BOP	Push/pull output buffer (non inverting)	
SRETS	Latch with reset and set	8	ZOP	Tri-state output buffer	
MASTER-SLAVE FLIP-FLOPS			ODN	Open drain output pull down	
DT	D-type	6	ODP	Open drain output pull up	
D2T	Dual input D-type	8	TRIOP	Tristate I/O buffer	4
SDT	Set D-type	7	BUSINT	Bus interface	6
RDT	Reset D-type	7	STEPUP	Output Buffer	6
SRDT	Set/reset D-type	8	POWER SUPPLY PADS		
JK	JK flip-flop	10	VDD	V _{DD} pad	
SDK	JK flip-flopwith set	11	VSS	V _{SS} pad	
RJK	JK flip-flop with reset	11			
SRJK	JK flip-flop with reset and set	12			
TOGGLE FLIP-FLOPS					
STT	Set T-type	7			
RTT	Reset T-type	7			
SRTT	Set/reset T-type	8			
SYNCHRONOUS COUNTER					
SYNC	Synchronous counter stage	10			

MA9000 Series

MACROS

The following Macros are included in the MA9000 library. GPS are constantly adding new Macros to the library, please contact our nearest office for information on the latest additions.

Macro name	Macro name
ACOUNTn	Asynchronous counters
ALU4	ALU
GCOUNTn	Gray counters
JCOUNTn	Johnson counters
LADDn	Lookahead adders
MCOMPn	Magnitude comparators
PARITYn	Parity detectors
RADDn	Ripple carry adders
SEL8	Select 1 of 8
SEL16	Select 1 of 16
M2901	4 bit slice microprocessor
M2909	4 bit microprogram controller
M2902	Look ahead carry unit
M2910	12 bit microprogram sequencer
M2918	Pipeline register

DEVELOPMENT INTERFACES

Circuit design, captive and simulation activities are carried out by the customer. Schematic capture and simulation libraries for Dazix and Mentor Graphics CAE systems are provided by GPS. GPS will accept a simulated design and perform layout, verification checks and PG. GPS will then procure masks and fabricate and test parts prior to prototype delivery. The MA9000 arrays fall within the ESA capability domain.

DAZIX is a trademark of Intergraph UK
Mentor Graphics is a trademark of Mentor Graphics Corporation.


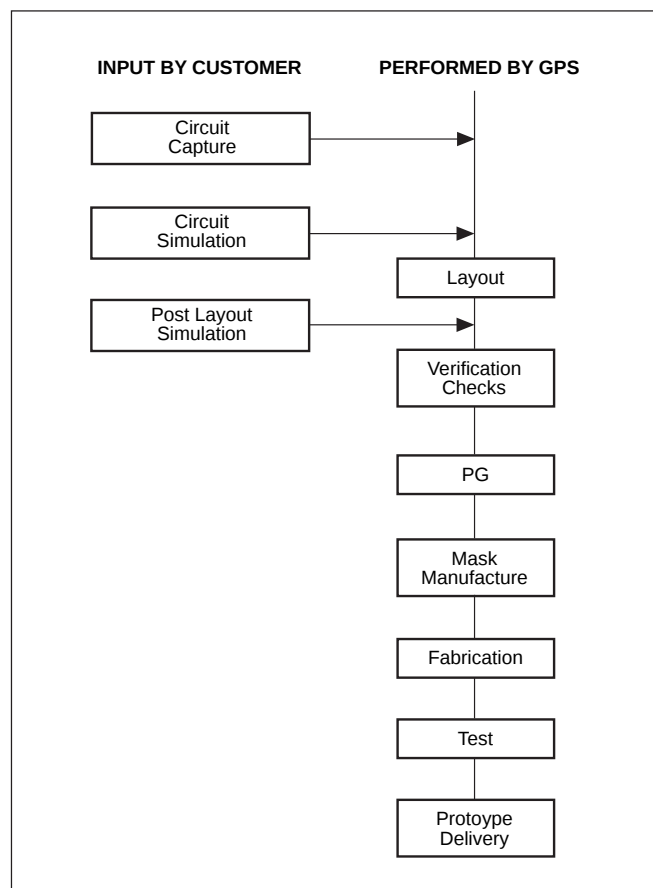


Figure 3: Development Interfaces

ORDERING INFORMATION

For details of Reliability, QA/QCI, Test, and Assembly options, see 'Manufacturing Capability and Quality Assurance Standards'.

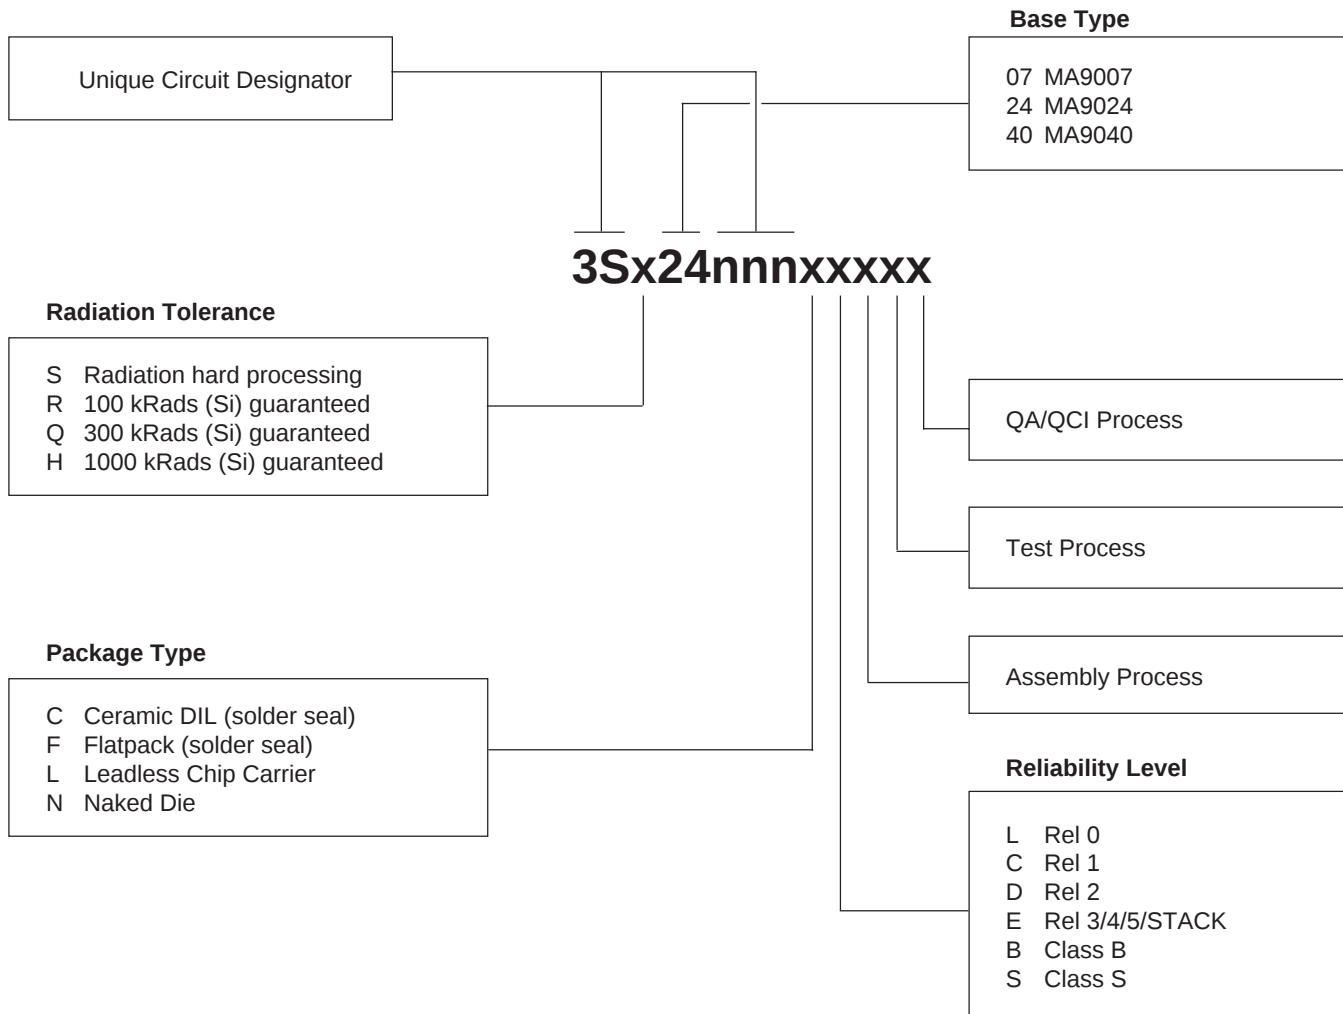

HEADQUARTERS OPERATIONS

GEC PLESSEY SEMICONDUCTORS

Cheney Manor, Swindon,
Wiltshire, SN2 2QW, United Kingdom.
Tel: (01793) 518000
Fax: (01793) 518411

GEC PLESSEY SEMICONDUCTORS

P.O. Box 660017,
1500 Green Hills Road, Scotts Valley,
California 95067-0017,
United States of America.
Tel: (408) 438 2900
Fax: (408) 438 5576

CUSTOMER SERVICE CENTRES

- **FRANCE & BENELUX** Les Ulis Cedex Tel: (1) 64 46 23 45 Fax: (1) 64 46 06 07
- **GERMANY** Munich Tel: (089) 3609 06-0 Fax: (089) 3609 06-55
- **ITALY** Milan Tel: (02) 66040867 Fax: (02) 66040993
- **JAPAN** Tokyo Tel: (03) 5276-5501 Fax: (03) 5276-5510
- **NORTH AMERICA** Scotts Valley, USA Tel: (408) 438 2900 Fax: (408) 438 7023
- **SOUTH EAST ASIA** Singapore Tel: (65) 3827708 Fax: (65) 3828872
- **SWEDEN** Stockholm Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- **TAIWAN, ROC** Taipei Tel: 886 2 5461260 Fax: 886 2 7190260
- **UK, EIRE, DENMARK, FINLAND & NORWAY** Swindon, UK Tel: (01793) 518527/518566 Fax: (01793) 518582

These are supported by Agents and Distributors in major countries world-wide.

© GEC Plessey Semiconductors 1995 Publication No. DS3598-3.4 May 1995

TECHNICAL DOCUMENTATION - NOT FOR RESALE. PRINTED IN UNITED KINGDOM.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.