

ZLLS2000

40V SILICON HIGH CURRENT LOW LEAKAGE SCHOTTKY DIODE

SUMMARY

Schottky Diode $V_R = 40V$; $I_F = 2.2A$; $I_R = 40\mu A$

DESCRIPTION

This compact SOT23-6 packaged Schottky diode offers users an excellent performance combination comprising high current operation, extremely low leakage and low forward voltage ensuring suitability for applications requiring efficient operation at higher temperatures (above 85°C) see Operational Efficiency chart on page 4.



Key benefits:

Performance capability equivalent to much larger packages

Improved circuit efficiency & power levels

PCB area savings

FEATURES

- Low Equivalent On Resistance
- Extremely Low Leakage ($40\mu A$ @30V)
- High current capability ($I_F = 2.2A$)
- Low V_F , Fast switching Schottky
- SOT23-6 Package
- ZLLS2000 complements low temperature equivalent ZHCS2000
- Package thermally rated to 150°C

APPLICATIONS

- DC - DC Converters
- Strobes
- Mobile Phones
- Charging Circuits
- Motor control


ORDERING INFORMATION

DEVICE	REEL (inches)	TAPE WIDTH (mm)	QUANTITY PER REEL
ZLLS1000TA	7	8mm embossed	3000 units
ZLLS1000TC	13	8mm embossed	10000 units


DEVICE MARKING

L10

Cathode



Anode



Top view

ISSUE 1 - JANUARY 2002



ZLLS2000

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Schottky Diode			
Continuous Reverse Voltage	V _R	40	V
Forward Current	I _F	2.2	A
Peak Repetitive Forward Current Rectangular Pulse Duty Cycle	I _{FPK}	3.55	A
Non Repetitive Forward Current t=≤100μs	I _{FSM}	36	A
t=≤10ms		12	A
Package			
Power Dissipation at T _{amb} =25°C single die continuous	P _D	1.1	W
single die measured at t<5 secs		1.71	W
Storage Temperature Range	T _{stg}	-55 to +150	°C
Junction Temperature	T _i	150	°C

THERMAL RESISTANCE

PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient (a)	$R_{\theta JA}$	113	°C/W
Junction to Ambient (b)	$R_{\theta JA}$	73	°C/W


Notes

(a) For a device surface mounted on 25mm x 25mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.

(b) For a device surface mounted on FR4 PCB measured at $t < 5$ secs.

ZLLS2000

TYPICAL CHARACTERISTICS

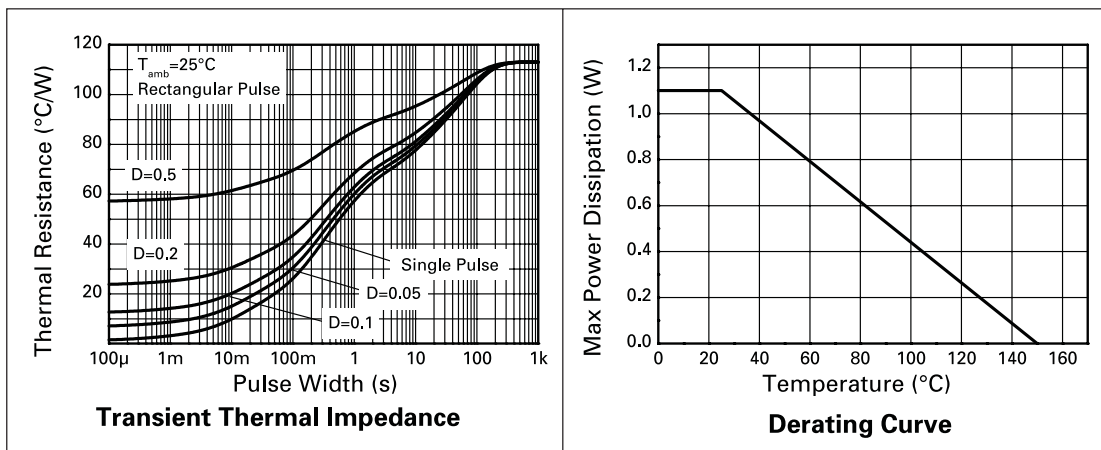

ZLLS2000


ELECTRICAL CHARACTERISTICS (at Tamb = 25°C unless otherwise stated).

SCHOTTKY DIODE CHARACTERISTICS						
Reverse Breakdown Voltage	$V_{(BR)R}$	40			V	$I_R = 1\text{mA}$
Forward Voltage	V_F		260	-	mV	$I_F = 50\text{mA}^*$
			290	-	mV	$I_F = 100\text{mA}^*$
			322	-	mV	$I_F = 250\text{mA}^*$
			360	370	mV	$I_F = 400\text{mA}^*$
			420	430	mV	$I_F = 750\text{mA}^*$
			470	490	mV	$I_F = 1000\text{mA}^*$
			520	640	mV	$I_F = 1500\text{mA}^*$
			610		mV	$I_F = 1000\text{mA}^*$
			500			$I_F = 2000\text{mA}^*, T_a = 100^\circ\text{C}$
Reverse Current	I_R		11	20	μA	$V_R = 30\text{V}$
Diode Capacitance	C_D		31		pF	$f = 1\text{MHz}, V_R = 30\text{V}$
Reverse Recovery Time	t_{rr}		2.58		ns	Switched from $I_F = 500\text{mA}$
Reverse Recovery Charge	Q_{rr}		1.45		nC	to $V_R = 5\text{V}$. Measured @ $I_R 50\text{mA}$. $di / dt > 1\text{A} / \text{ns}$. $R_{\text{source}} = 6\text{ohm}$.

*Measured under pulsed conditions.

Operational Efficiency chart

The operational efficiency chart indicates the beneficial use of the ZLLS Series diodes in applications requiring higher voltage, higher temperature operation. Circuits requiring Low voltage Low temperature operation will benefit from using Zetex low V_F ZHCS Series diodes.

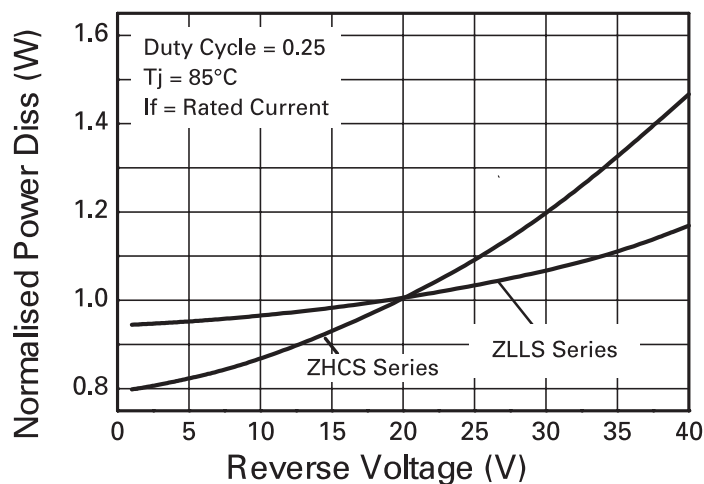


Operational Efficiency Example



ISSUE 1 - JANUARY 2002


ZLLS2000

TYPICAL CHARACTERISTICS

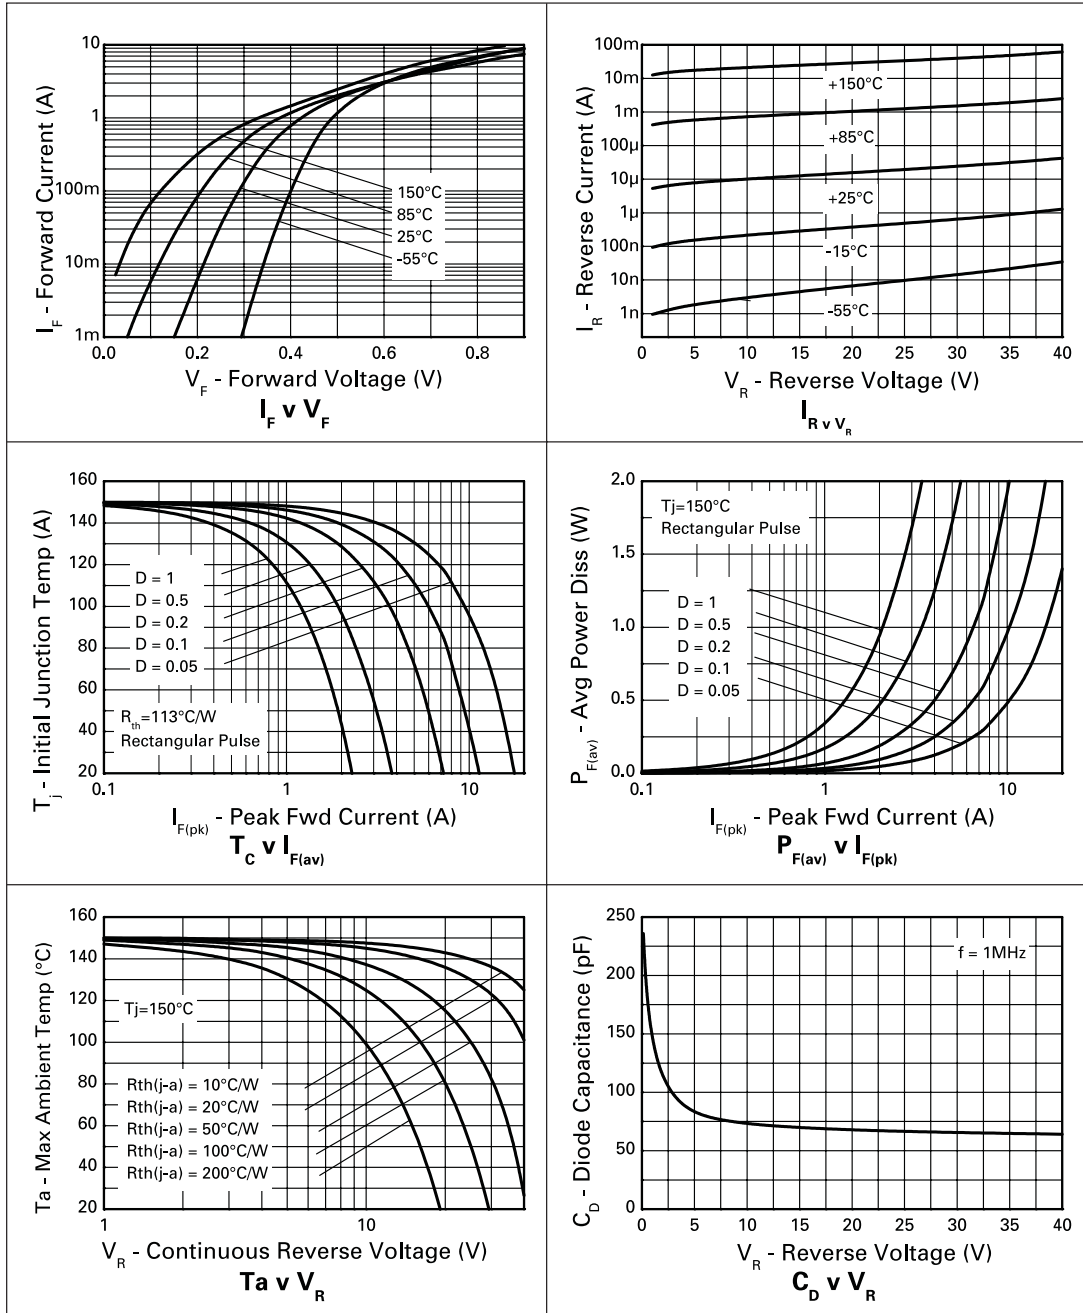


ZLLS2000

PACKAGE DIMENSIONS

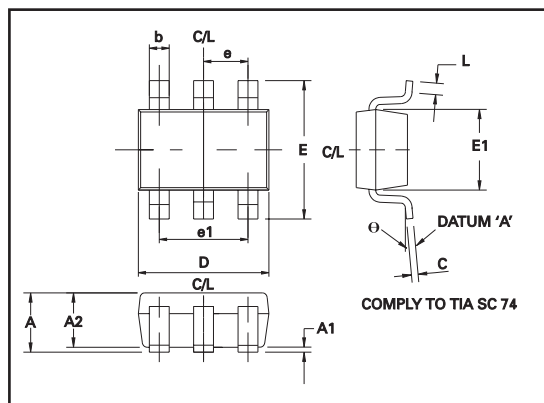

PAD LAYOUT DETAILS

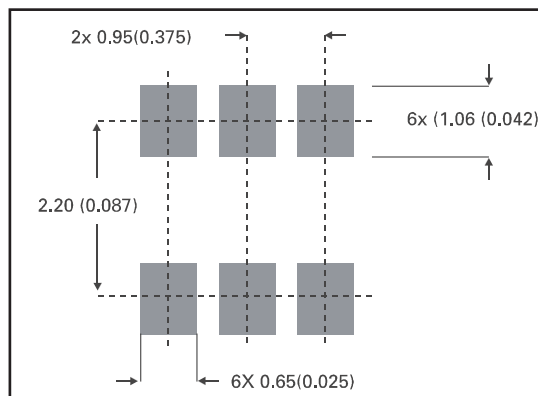

DIM	Millimetres	
	Min	Max
A	0.90	1.45
A1	0.00	0.15
A2	0.90	1.30
b	0.20	0.50
C	0.09	0.26
D	2.70	3.10
E	2.20	3.20
E1	1.30	1.80
L	0.10	0.60
e	0.95 REF	
e1	1.90 REF	
Θ	0°	30°

© Zetex plc 2001

Zetex plc
Fields New Road
Chadderton
Oldham, OL9 8NP
United Kingdom
Telephone (44) 161 622 4422
Fax: (44) 161 622 4420

Zetex GmbH
Streitfeldstraße 19
D-81673 München
Germany
Telefon: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 49

Zetex Inc
700 Veterans Memorial Hwy
Hauppauge, NY11788
USA
Telephone: (631) 360 2222
Fax: (631) 360 8222

Zetex (Asia) Ltd
3701-04 Metroplaza, Tower 1
Hing Fong Road
Kwai Fong
Hong Kong
Telephone: (852) 26100 611
Fax: (852) 24250 494

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com

ZETEX

ISSUE 1 - JANUARY 2002