



P-Channel Enhancement-Mode MOSFET Transistors

PRODUCT SUMMARY

Part Number	$V_{(BR)DSS}$ Min (V)	$r_{DS(on)}$ Max (Ω)	$V_{GS(th)}$ (V)	I_D (A)
VP0300B	-30	2.5 @ $V_{GS} = -12$ V	-2 to -4.5	-1.25
VP0300L		2.5 @ $V_{GS} = -12$ V	-2 to -4.5	-0.32
VP0300LS		2.5 @ $V_{GS} = -12$ V	-2 to -4.5	-0.5
VQ2001J		2 @ $V_{GS} = -12$ V	-2 to -4.5	-0.6
VQ2001P		2 @ $V_{GS} = -12$ V	-2 to -4.5	-0.6

FEATURES

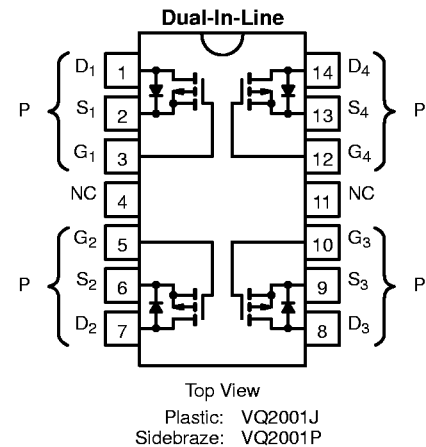
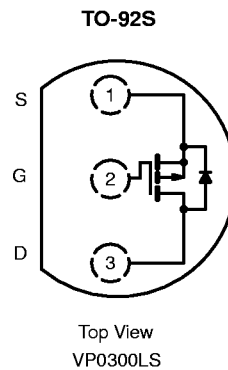
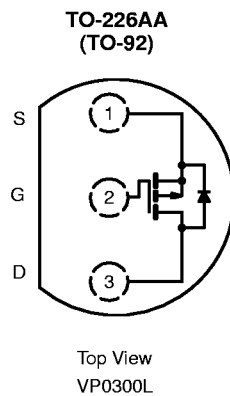
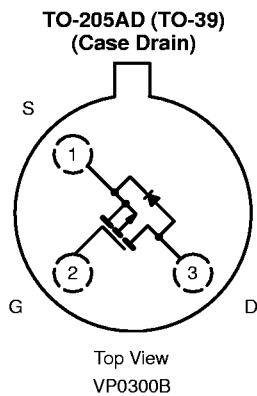
- High-Side Switching
- Low On-Resistance: 1.5 Ω
- Moderate Threshold: -3.1 V
- Fast Switching Speed: 17 ns
- Low Input Capacitance: 60 pF

BENEFITS

- Ease in Driving Switches
- Low Offset (Error) Voltage
- Low-Voltage Operation
- High-Speed Switching
- Easily Driven Without Buffer

APPLICATIONS

- Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Memories, Transistors, etc.
- Battery Operated Systems
- Power Supply, Converter Circuits
- Motor Control

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	VP0300B	VP0300L	VP0300LS	VQ2001J/P		Unit
					Single	Total Quad	
Drain-Source Voltage	V_{DS}	-30	-30	-30	-30	-30	V
Gate-Source Voltage	V_{GS}	± 20	± 20	± 20	± 20	± 20	
Continuous Drain Current ($T_J = 150^\circ\text{C}$)	I_D	-1.25 ^b	-0.32	-0.5	-0.6	-0.6	A
		-0.79 ^b	-0.2	-0.32	-0.37	-0.37	
Pulsed Drain Current ^a	I_{DM}	-3	-2.4	-3	-2	-2	
Power Dissipation	P_D	6.25 ^b	0.8	0.9	1.3	2	W
		2.5 ^b	0.32	0.4	0.52	0.8	
Maximum Junction-to-Ambient	R_{thJA}	20 ^b	156	139	96	62.5	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150					$^\circ\text{C}$

Notes

- a. Pulse width limited by maximum junction temperature.
b. Power dissipation and continuous drain current at $T_C = 25^\circ\text{C}$; $R_{thJC} = 20^\circ\text{C/W}$.
Applications information may also be obtained via FaxBack, request document #70611.

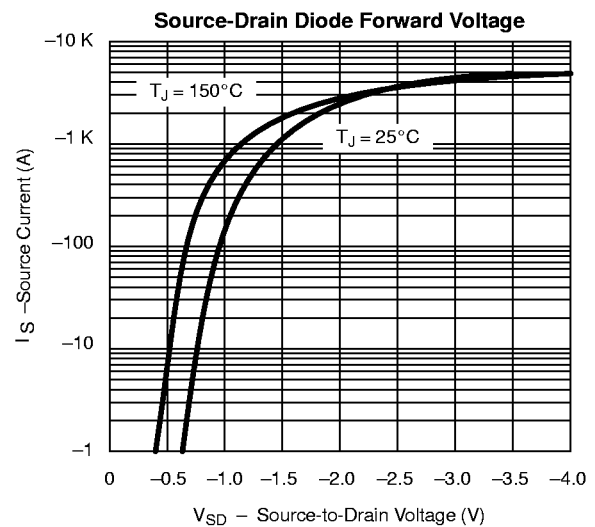
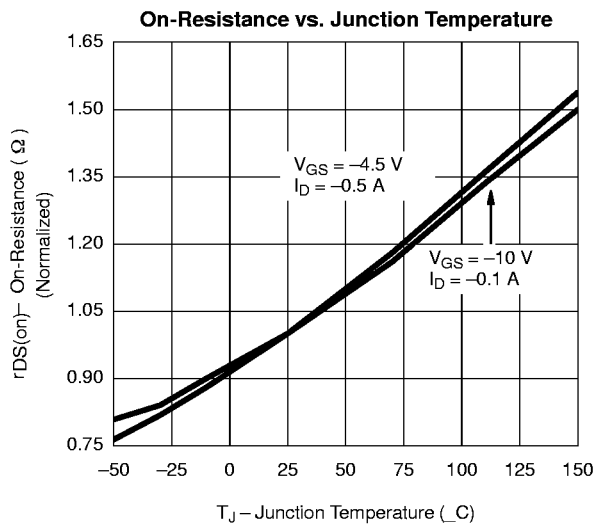
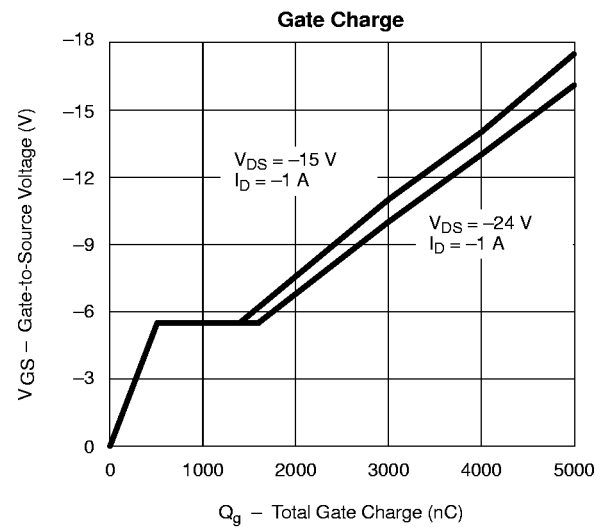
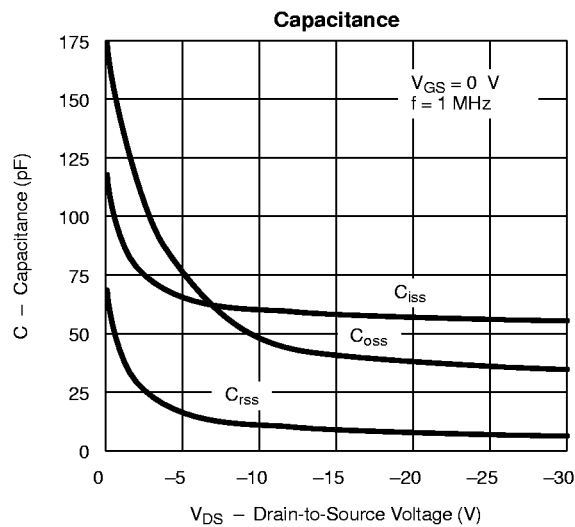
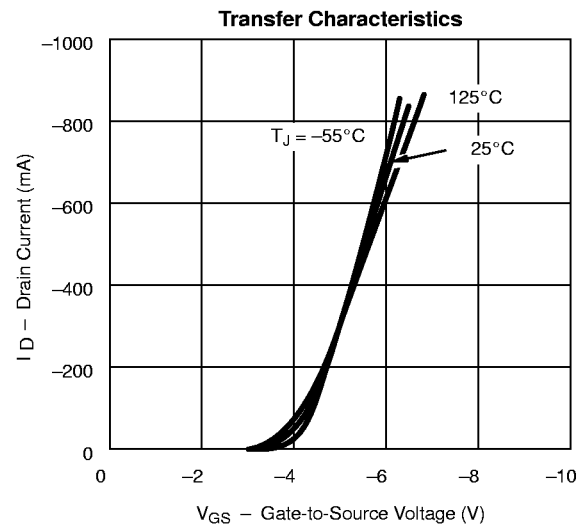
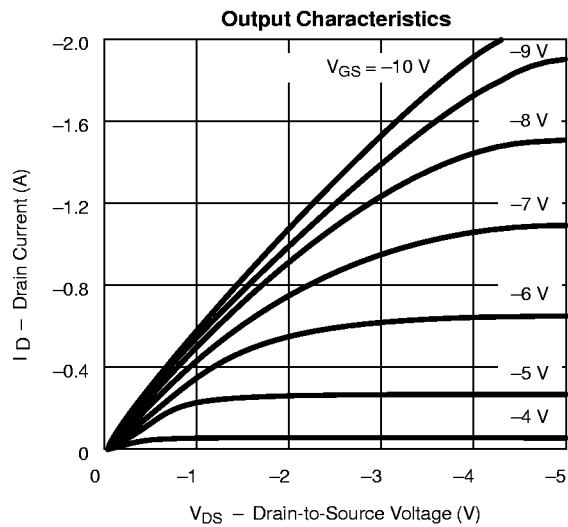
SPECIFICATIONS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

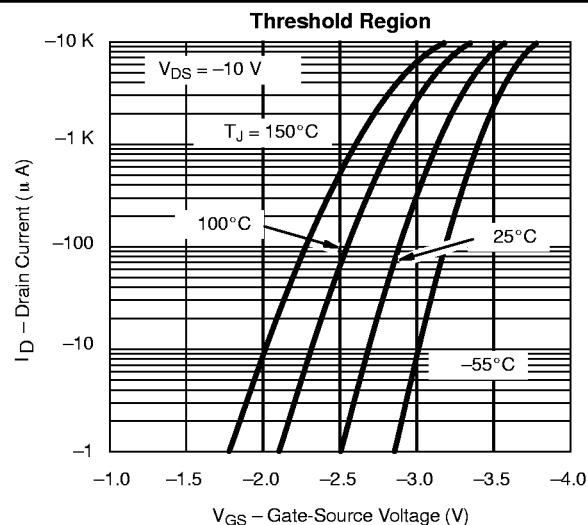
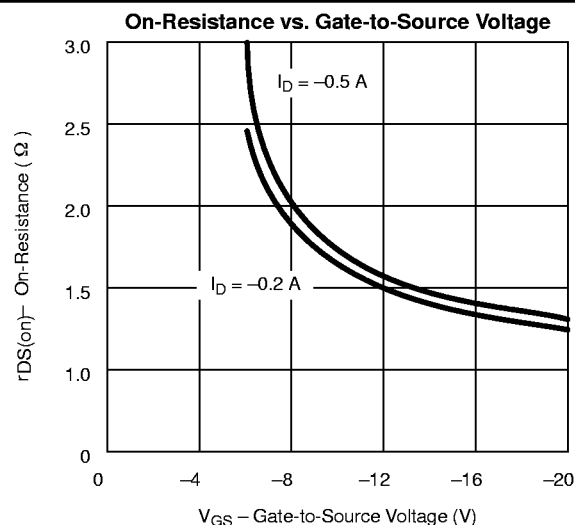
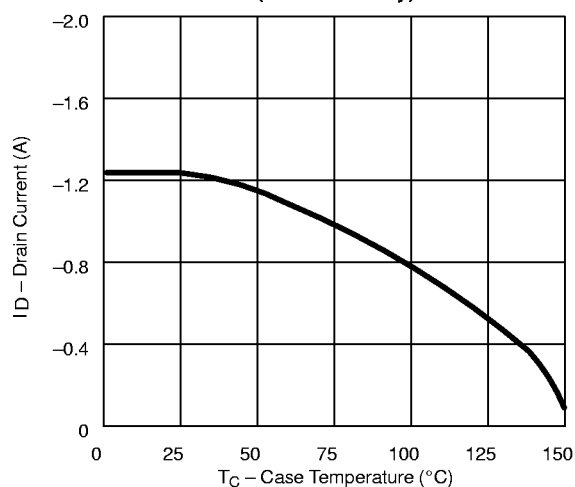
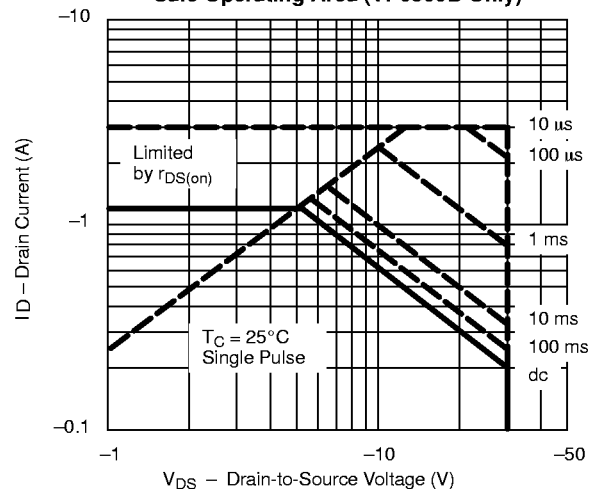
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				VP0300B/L/LS		VQ2001J/P		
				Min	Max	Min	Max	
Static								
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = −10 μA	−55	−30		−30		V
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = −1 mA	−3.1	−2	−4.5	−2	−4.5	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±16 V					±100	nA
		T _J = 125°C					±500	
		V _{DS} = 0 V, V _{GS} = ±20 V			±100			
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = −24 V, V _{GS} = 0 V			−10			μA
		T _J = 125°C			−500		−500	
		V _{DS} = −30 V, V _{GS} = 0 V					−10	
On-State Drain Current ^b	I _{D(on)}	V _{DS} = −10 V, V _{GS} = −12 V	−2.8	−1.5		−1.5		A
Drain-Source On-Resistance ^b	r _{DS(on)}	V _{GS} = −12 V, I _D = −1 A	1.5		2.5		2	Ω
		T _J = 125°C	2.6		3.6		3.6	
Forward Transconductance ^b	g _{fs}	V _{DS} = −10 V, I _D = −0.5 A	370	200		200		mS
Common Source Output Conduc- tance ^b	g _{os}	V _{DS} = −7.5 V, I _D = −0.05 A	0.25					
Dynamic								
Input Capacitance	C _{iss}	V _{DS} = −15 V, V _{GS} = 0 V f = 1 MHz	60		150		150	pF
Output Capacitance	C _{oss}		40		100		100	
Reverse Transfer Capacitance	C _{rss}		10		60		60	
Switching ^c								
Turn-On Time	t _{ON}	V _{DD} = −25 V, R _L = 23 Ω I _D ≅ −1 A, V _{GEN} = −10 V R _G = 25 Ω	19		30			ns
Turn-Off Time	t _{OFF}		17		30			
Turn-On Time	t _{ON}	V _{DD} = −15 V, R _L = 23 Ω I _D ≅ −0.6 A, V _{GEN} = −10 V R _G = 25 Ω	19				30	
Turn-Off Time	t _{OFF}		16				30	

Notes

- a. For DESIGN AID ONLY, not subject to production testing.
b. Pulse test: $PW \leq 300\text{ }\mu\text{s}$ duty cycle $\leq 2\%$.
c. Switching time is essentially independent of operating temperature.

VPEA03

**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**THERMAL RATINGS****Maximum Drain Current vs. Case Temperature (VP0300B Only)****Safe Operating Area (VP0300B Only)****Normalized Effective Transient Thermal Impedance, Junction-to-Ambient (TO-226AA, VP0300L Only)**