


33E D 3030609 0000725 T VCT

VT400 Series

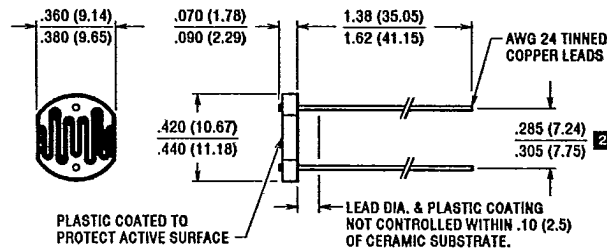

PARAMETER	SYMBOL	RATING	UNITS
CONTINUOUS POWER DISSIPATION DEMAND (20 MINUTES) DERATE ABOVE 25° C	P _D ΔP _D / ΔT	400 600 8	mW mW mW/°C
TEMPERATURE RANGE OPERATING AND STORAGE	T _A	– 50 to +75	°C

Part Number *	Old Part Number	Resistance (Ohms) 3									Peak Spectral Response		Sensitivity (γ , typ.) LOG (R10/R100) LOG (100/10)	V_{Max} (V, pk)	Response Time @ 1 fc (ms, typ.)	
		2 fc 2850 K			1 fc 6500 K, 50 VAC			DARK							Rise (1-1/e)	Fall (1/e)
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	sec.	(nm)	Type					
VT42B193	VT423LR	—	19k	—	29k	48k	67k	3.3M	30	515	2	0.9	400	90	18	
VT42B113	VT423HR	—	11k	—	17k	28k	39k	2M	30	515	2	0.9	400	90	18	
VT42B952	VT422LR	—	9.5k	—	14k	24k	33k	2M	30	515	2	0.9	250	90	18	
VT42B552	VT422HR	—	5.5k	—	8.4k	14k	20k	1.4M	30	515	2	0.9	250	90	18	
VT42B482	VT421LR	—	4.8k	—	7.2k	12k	17k	1.4M	30	515	2	0.9	200	90	18	
VT42B322	VT420LR	—	3.2k	—	4.3k	7.2k	10k	1M	30	515	2	0.9	200	90	18	
VT42B282	VT421HR	—	2.8k	—	4.2k	6.9k	9.6k	1M	30	515	2	0.95	200	90	18	
VT42B232	VT420HR	—	2.3k	—	3.1k	5.1k	7.1k	500k	30	515	2	0.9	200	90	18	
VT47A901	VT471	0.6k	0.9k	1.2k	—	—	—	300k	5	615	7	0.75	150	70	15	
VT47A601	VT471L	0.4k	0.6k	0.8k	—	—	—	100k	5	615	7	0.65	50	70	15	

0590

E G & G VACTEC