

Torqueleader 'Ergo' Quickset Calibrated Screwdrivers

NEW enhanced version of the well known 'Quickset' Calibrated Torque Limiting Screwdriver.

■ Ergonomic grip

New - specially designed ergonomic rubber hand grip.

■ Positive lock

New - Positive locking system prevents accidental adjustment.

Micrometer adjustment on all models for easy, accurate setting.

■ Quick Release Chuck

New - Streamlined Stainless Steel 1/4" Female Hex (FH) bit holder for a secure connection between bit holder and accessory bit.

Also available with 1/4" Square Drive (SD) spindle for use with nut sockets.


■ Range of 14 tools

Range includes both ISO and Imperial scale versions with an overall torque range of 0.2 to 9 N.m (20 ozf.in to 80 lbf.in).


■ Automatic resetting

Precision radial ball clutch and cam design gives automatic resetting.



QSN 600 FH

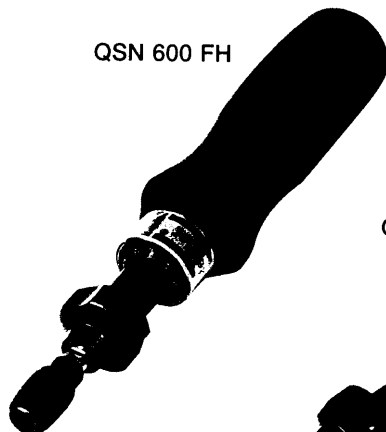

QSN 900 SD

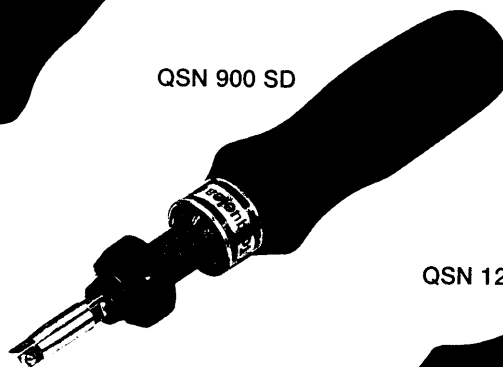

QSN 120 FH

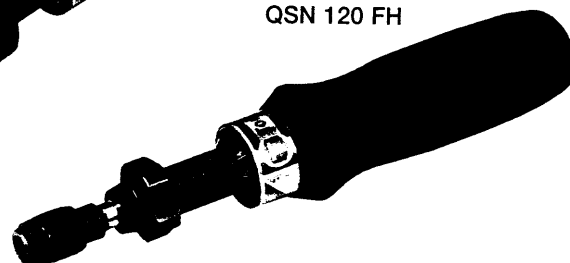

Sliding Tee Bar

■ Eliminates over-tightening

Smooth 'slipping' mechanism signals when the set torque has been achieved and completely eliminates overtightening.

Bi-directional operation with consistent repeat accuracy.

■ Versatile tools

Ideal for the application of low torque values to fasteners in areas such as electrical, electronics and instrument assembly.

The preferred and certified ranges of these tools is in accordance with the requirements of ISO 6789 : 1992.



■ Extra leverage

Removable Tee Bar on larger models provides extra leverage when required.

Note: Does not affect torque setting or accuracy.

■ Accessories

Wide range of accessories available.

MODEL	ORDERING CODE	CALIBRATED RANGE	INCREMENT	LENGTH mm	WEIGHT g	ADJUSTING GRIP COLOUR
QSN 120 FH	060100	20 - 120 cN.m	1 cN.m	183	230	Blue
QSA 12 FH	060120	2 - 12 lbf.in	0.1 lbf.in	183	230	Silver Grey
QSA 160z FH	060140	20 - 160 ozf.in	1 ozf.in	183	230	Blue
QSN 120 SD	060200	20 - 120 cN.m	1 cN.m	183	230	Blue
QSA 12 SD	060220	2 - 12 lbf.in	0.1 lbf.in	183	230	Silver Grey
QSA 160z SD	060240	20 - 160 ozf.in	1 ozf.in	183	230	Blue
QSN 600 FH†	060300	1 - 6 N.m	0.1 N.m	196	335	Red
QSA 50 FH†	060320	10 - 50 lbf.in	1 lbf.in	196	335	Red
QSN 600 SD†	060400	1 - 6 N.m	0.1 N.m	196	335	Red
QSA 50 SD†	060420	10 - 50 lbf.in	1 lbf.in	196	335	Red
QSN 900 FH†	060500	4 - 9 N.m	0.1 N.m	196	335	Green
QSA 80 FH†	060520	30 - 80 lbf.in	1 lbf.in	196	335	Green
QSN 900 SD†	060600	4 - 9 N.m	0.1 N.m	196	335	Green
QSA 80 SD†	060620	30 - 80 lbf.in	1 lbf.in	196	335	Green

† Supplied with Sliding Tee Bar