

For Single Photon Counting, Dark Counts 50cps Typ. at 25°C

For Extremely Low Light Level Detection

28mm (1-1/8 Inch) Diameter, 9-stage, Multialkali Photocathode, Side-On Type

185 to 850nm Spectral Response

GENERAL

Parameter		Description/Value	Unit
Spectral Response		185 to 850	nm
Wavelength of Maximum Response		430	nm
Photocathode	Material	Multialkali	—
	Minimum Effective Area	8 × 24	mm
Window Material		UV glass	—
Dynode	Structure	Circular-cage	—
	Number of Stages	9	—
Direct Interelectrode Capacitances	Anode to Last Dynode	Approx. 4	pF
	Anode to All Other Electrodes	Approx. 6	pF
Base		JEDEC No. B11-88	—
Weight		Approx. 45	g
Suitable Socket		E678-11A (option)	—
Suitable Socket Assembly		E717-21, E717-37 (option)	—

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	1250	Vdc
	Between Anode and Last Dynode	250	
Average Anode Current		0.1	mA
Ambient Temperature		-80 to +50	°C

CHARACTERISTICS (at 25°C)

Parameter			Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous (2856K)		140	200	—	μA/lm
	Quantum Efficiency	at 400nm	—	23.7	—	%
		at 500nm	—	18.3	—	
		at 600nm	—	10.7	—	
		at 700nm	—	2.7	—	
		at 800nm	—	0.56	—	
	Red/White Ratio		0.1	0.15	—	—
Blue (CS-5-58 filter)		—	7.5	—	μA/lm-b	
Anode Sensitivity	Luminous (2856K)		300	700	—	A/lm
Gain			—	3.5 × 10 ⁶	—	—
Dark Counts *			—	50	100	cps
Anode Dark Current (after 30min. storage in darkness)			—	0.2	1	nA
Time Response	Anode Pulse Rise Time		—	2.2	—	ns
	Electron Transit Time		—	22	—	
	Transit Time Spread (T.T.S.)		—	1.2	—	

* Measured at the voltage producing the gain of 1 × 10⁶

VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	P
Ratio	1	1	1	1	1	1	1	1	1	1	1

Supply Voltage: 1000Vdc, K: Cathode, Dy: Dynode, P: Anode

Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office. Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. © 1998 Hamamatsu Photonics K.K.

PHOTOMULTIPLIER TUBE R4632

Figure 1: Typical Spectral Response

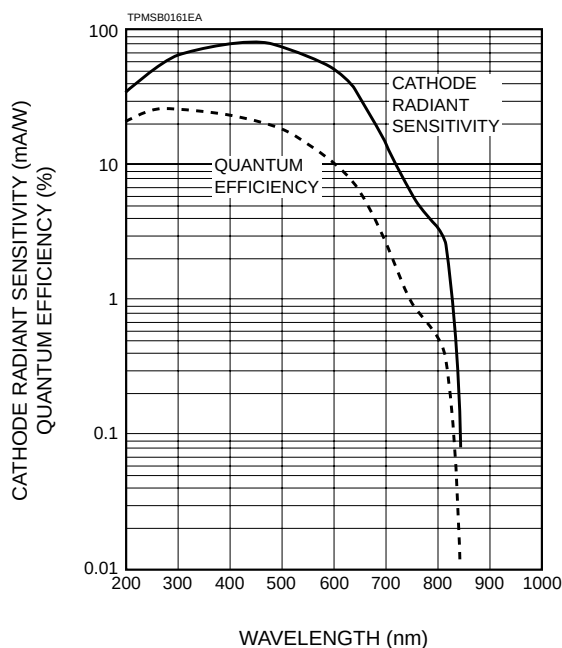


Figure 2: Anode Luminous Sensitivity and Gain Characteristics

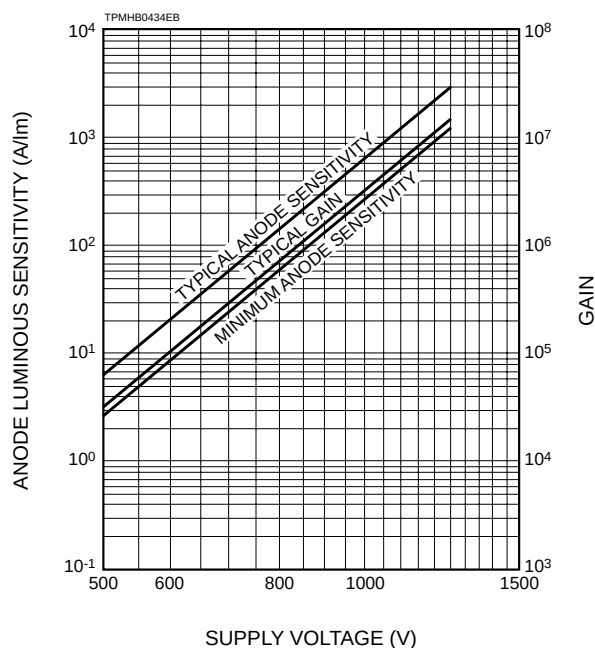


Figure 3: Dimensional Outline and Basing Diagram (Unit: mm)


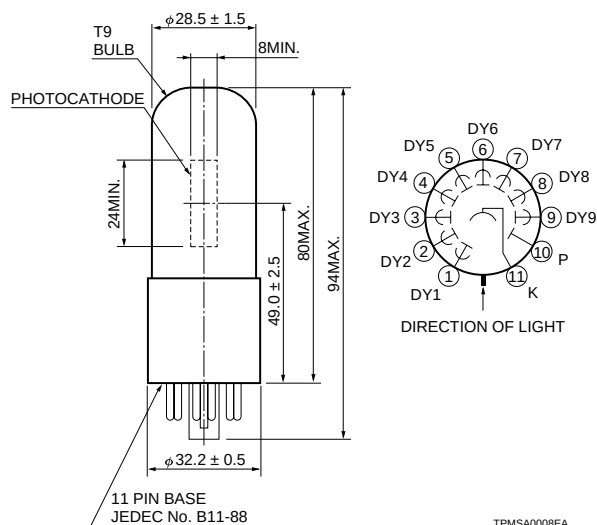


Figure 4: Optional Accessory (Unit: mm)

D Type Socket Assembly E717-21

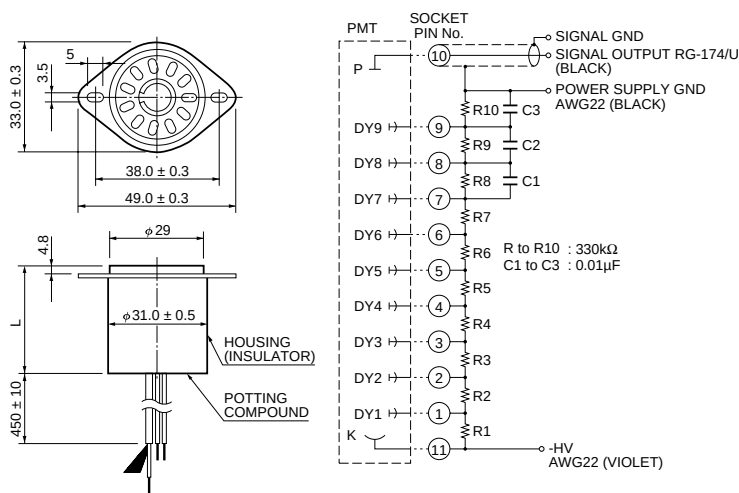

* MHV/BNC connector type E717-37 is also available.

TACCA0002ED

HAMAMATSU

HAMAMATSU PHOTONICS K.K., ELETORON Tube Center

314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trappu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: (44)181-367-3560, Fax: (44)181-367-6384

North Europe: Hamamatsu Photonics Norden AB: Färögatan 7, S-164-40 Kista Sweden, Telephone: (46)8-703-29-50, Fax: (46)8-750-58-95

Italy: Hamamatsu Photonics Italia: S.R.L.: Via Della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)2-935 81 733, Fax: (39)2-935 81 741

TPMS1046E01
JUN. 1998