


# Ball Valve Lockout Devices

## Universal Ball Valve Lockout




These lockout and safety products are an innovation in the Brady programme. They can be used to lockout ball-valves without difficulty during maintenance work. A special feature of these ball-valves is that they can be locked in open, closed, and in half-open or partially open positions. For half-open or partially open positions you need a second locking arm, which can be ordered separately.

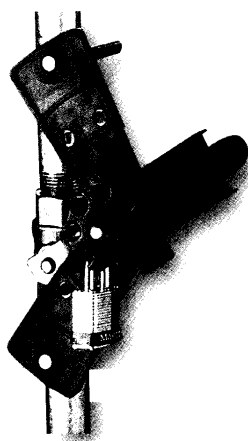

**i** The possibility of locking ball-valves in the half open or fully open position makes these new ball-valve lockout devices suitable for monitoring plants and processes in operation. Only authorised persons who have the key are then able to adjust the position of the ball-valve. This lockout device is also ideally suited for pipes which have to be permanently open (such as water required for extinguishing fires)

| Type/Size | Part N° | Max. size of the handle (thickness x width) mm |
|-----------|---------|------------------------------------------------|
|-----------|---------|------------------------------------------------|

|                                      |        |         |
|--------------------------------------|--------|---------|
| Universal Ball Valve Lockout (Small) | 065400 | 19 x 25 |
| Universal Ball Valve Lockout (Large) | 065401 | 31 x 40 |
| Locking Arm (Small)                  | 065402 | 19 x 25 |
| Locking Arm (Large)                  | 065403 | 31 x 40 |

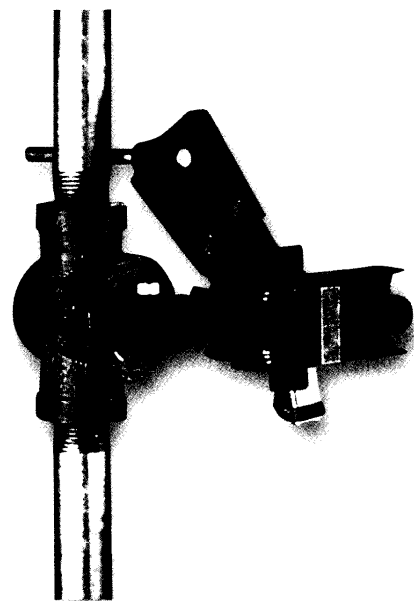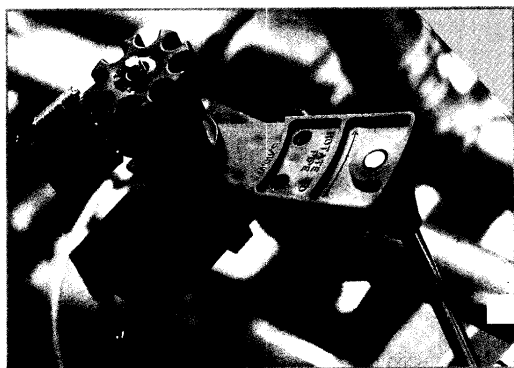

| Part No. | A     | B     | C     | D     | E     | F      | G      | H      | I      |
|----------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| 065400   | 25 mm | 8 mm  | 28 mm | 8 mm  | 30 mm | 100 mm | 70 mm  | 150 mm | 180 mm |
| 065401   | 25 mm | 10 mm | 25 mm | 13 mm | 50 mm | 130 mm | 120 mm | 180 mm | 246 mm |

## Ball Valve Lockout Devices

The ideal method to close ball-valves: a simple idea and therefore easy to use.

The patented designs allows you to monitor virtually any valve lever. Two large models can be used with locks with shackles up to 9,5 mm

| Size valve lever | Lock shackle max. diameter | Minimum length | Material | Part No. |
|------------------|----------------------------|----------------|----------|----------|
| 6 - 25 mm        | 7 mm                       | 25 mm          | Nylon™   | 065666   |
| 6 - 25 mm        | 9,5 mm                     | 19 mm          | Steel    | 065692   |
| 32 - 76 mm       | 7 mm                       | 19 mm          | Steel    | 065669   |
| 32 - 76 mm       | 9,5 mm                     | 19 mm          | Steel    | 065693   |

| Part No. | A   | B  | C   | D  | E  | F   | G pieces | G Ø |
|----------|-----|----|-----|----|----|-----|----------|-----|
| 065666   | 80  | 30 | 60  | 8  | 12 | 71  | 8        | 7,5 |
| 065692   | 87  | 30 | 50  | 8  | 11 | 63  | 6        | 10  |
| 065669   | 150 | 30 | 110 | 10 | 15 | 110 | 15       | 7,5 |
| 065693   | 150 | 30 | 110 | 10 | 15 | 110 | 7        | 10  |

