
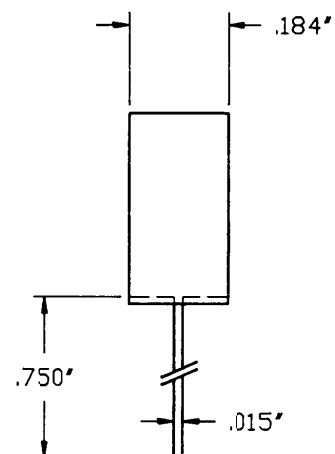


THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HERewith IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

LTR.	DESCRIPTION	DATE	APP'D.
01	RELEASED PER ECO # 2321	JC 1/15/91	BJR

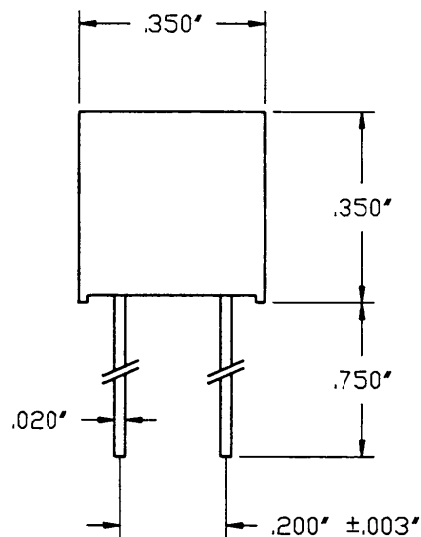

NOTES:

1. UL RECOGNIZED, FILE E19180,
GUIDE JDYX2; CSA CERTIFIED
FILE 42731, CLASS 1421-01.

ELECTRICAL SPECIFICATIONS

AMPERAGE	3 AMPS
VOLTAGE	250 VOLTS
INTERRUPTING & VOLTAGE RATINGS	50 AMPS
TIME-CURRENT CHARACTERISTICS	CARRY 100% FOR 4 HRS MIN. OPEN AT 200% IN 10 SEC. MAX.
COLD RESISTANCE DATA	0.071 Ω

COPY

VICOR ANDOVER, MA. U.S.A.

DRAWN:	7/90	FUSE 3 AMPS, 250 VOLTS	
CHECKED: JCL	9/90		
APP'D:			
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING		TOLERANCES (EXCEPT AS NOTED) .XX $\pm$.01 .XXX $\pm$.005 FRACT $\pm$ 1/64 ANGLES $\pm$ 1°	DRAWING NO. 02178
			REV. 01
		SCALE: 2:1	SHEET 1 OF 1
		NEXT ASSY:	