
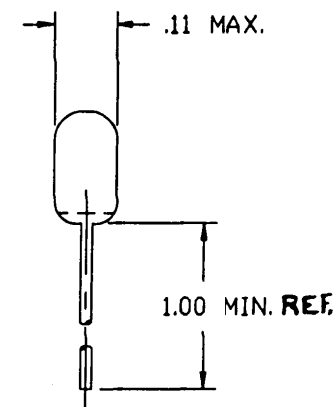
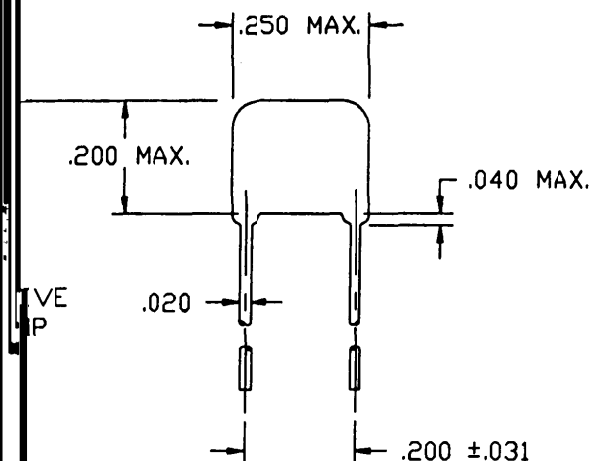


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
1	RELEASED PER ECO #2210	J.W. 9/27/90	BJR
2	REVISED PER E920556	J.W. 10/23/92	U74

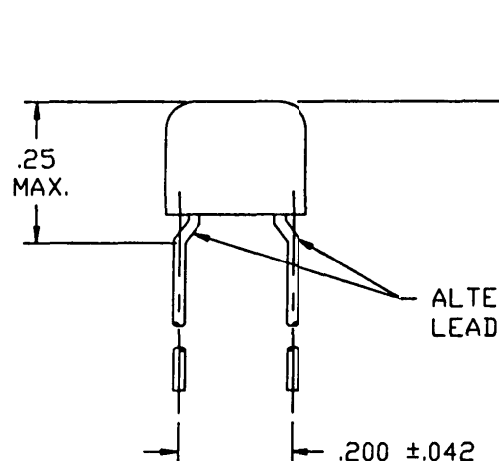

ELECTRICAL SPECIFICATIONS

CAPACITANCE 1KHz, 1VAC	_____
CAPACITANCE TOLERANCE	_____
VOLTAGE	_____
CAPACITOR TYPE	_____
DISSIPATION FACTOR	2.5% MAX AT 1KH.
INSULATION RESISTANCE	_____ 10 M
DIELECTRIC WITHOLDING VOLTAGE	250% RATED V FOR 5 SEC WIT MAX CHARGING

UF
2%
V
7R
AC
MS
GE
MA
ENT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		
FRACTIONS	DECIMALS	ANGLES
± 1/64	.XX ± .01	± 1°
	.XXX ± .005	
THRD ANGLE PROJECTION		
DO NOT SCALE DRAWING		

APPROVALS		DATE		
DRAWN		6/90		
CHECKED				
ISSUED				
APP'D				
SIZE	FSCM NO.	DWG. NO.	REV.	
B	67131	04872	2	
SCALE	4X	SHEET 1 OF 1		



CAPACITOR, X7R
.01uF ±20%, 500V

COPY

ORIGINAL
ONLY WHEN STAMPED
IN RED