



U74HC32

CMOS IC


QUADRUPLE 2-INPUT POSITIVE-OR GATES

■ DESCRIPTION


The UTC **U74HC32** devices contain four independent 2-input OR gates. They perform the Boolean function $Y = \overline{A} \cdot \overline{B}$ or $Y = A+B$ in positive logic.

■ FEATURES


- * Wide Operating Voltage Range of 1.0V ~ 7.0V
- * Low Power Consumption, 20μA Max I_{CC}
- * ± 20 mA Output Drive at 5V
- * Low Input Current of 1μA Max



DIP-14



SOP-14



TSSOP-14

*Pb-free plating product number: U74HC32L

■ ORDERING INFORMATION


Order Number		Package	Packing
Normal	Lead Free Plating		
U74HC32-D14-T	U74HC32L-D14-T	DIP-14	Tube
U74HC32-S14-T	U74HC32L-S14-T	SOP-14	Tube
U74HC32-S14-R	U74HC32L-S14-R	SOP-14	Tape Reel
U74HC32-P14-T	U74HC32L-P14-T	TSSOP-14	Tube

U74HC32L-D14-R

- (1) Packing Type
- (2) Package Type
- (3) Lead Plating

- (1) R: Tape Reel, T: Tube
- (2) D14: DIP-14, S14: SOP-14, P14: TSSOP-14
- (3) L: Lead Free Plating, Blank: Pb/Sn

■ PIN CONFIGURATION



■ LOGIC DIAGRAM (positive logic)



■ FUNCTION TABLE (each inverter)

INPUT		OUTPUT
A	B	Y
H	X	H
X	H	H
L	L	L

■ **ABSOLUTE MAXIMUM RATINGS** (unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage Range	V_{CC}	1.0~7.0	V
Input Clamp Current	I_{IK} ($V_{IN} < 0$ or $V_{IN} > V_{CC}$ (see Note 1))	± 20	mA
Output Clamp Current	I_{OK} ($V_{OUT} < 0$ or $V_{OUT} > V_{CC}$ (see Note 1))	± 20	mA
Continuous Output Current	I_O ($V_{OUT} = 0 \sim V_{CC}$)	± 25	mA
Continuous Current Through	V_{CC} or GND	± 50	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note : 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
 2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.
 Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **THERMAL DATA**

PARAMETER	SYMBOL	RATINGS	UNIT
Thermal Resistance Junction Ambient	SOP-14	86	°C/W
	DIP-14	80	°C/W
	TSSOP-14	113	°C/W

■ **RECOMMENDED OPERATING CONDITIONS** ($T_A = 25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2	4.5	6	V
High-Level Input Voltage	V_{IH}	$V_{CC} = 2\text{ V}$	1.4			V
		$V_{CC} = 4.5\text{ V}$	3			V
		$V_{CC} = 6\text{ V}$	4.2			V
Low- Level Input Voltage	V_{IL}	$V_{CC} = 2\text{ V}$			0.7	V
		$V_{CC} = 4.5\text{ V}$			1.5	V
		$V_{CC} = 6\text{ V}$			2	V
Input Voltage	V_{IN}		0		V_{CC}	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input transition Rise/Fall Time	dt/dv	$V_{CC} = 4.5\text{ V}$			500	ns
Operating Free-Air Temperature	T_A		-40		85	°C

Note: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.

■ **ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$, unless otherwise noted)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Output Voltage	V_{OH}	$V_{CC} = 4.5\text{ V}$, $V_{IN} = V_{IH}$ or V_{IL} , $I_{OH} = -20\mu\text{A}$	4.4	4.5		V
		$V_{CC} = 4.5\text{ V}$, $V_{IN} = V_{IH}$ or V_{IL} , $I_{OH} = -4\text{ mA}$	3.98	4.3		
Low-level Input Voltage	V_{OL}	$V_{CC} = 4.5\text{ V}$, $V_{IN} = V_{IH}$ or V_{IL} , $I_{OL} = 20\mu\text{A}$		0.001	0.1	V
		$V_{CC} = 4.5\text{ V}$, $V_{IN} = V_{IH}$ or V_{IL} , $I_{OL} = 4\text{ mA}$		0.18	0.26	
Input Current	I_{IN}	$V_{CC} = 6\text{ V}$, $V_{IN} = V_{CC}$ or 0		± 0.1	± 100	nA
Quiescent Supply Current	I_{CC}	$V_{CC} = 6\text{ V}$, $V_{IN} = V_{CC}$ or 0, $I_{OUT} = 0$			20	μA
Operating Characteristics						
Power Dissipation Capacitance Per Gate	C_{pd}	No load		20		pF

Note: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation.


■ **SWITCHING CHARACTERISTICS OVER RECOMMENDED OPERATING FREE-AIR TEMPERATURE RANGE** (Ta = 25°C, CL = 50 pF, unless otherwise specified)

PARAMETER	SYMBOL	FROM(INPUT)	TO(OUTPUT)	V _{CC}	MIN	TYP	MAX	UNIT
Propagation Delay from A or B to Y	t _{pd}	A or B	Y	2V			43	ns
				4.5V			18	
				6V			15	
Output Rise and Fall Time	t _T		Y	2V			33	ns
				4.5V			19	
				6V			17	

■ TEST CIRCUIT AND WAVEFORMS

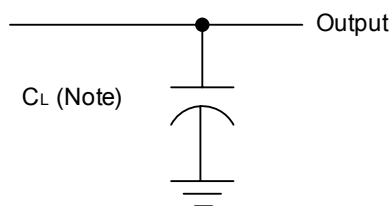

Note: C_L includes probe and jig capacitance.

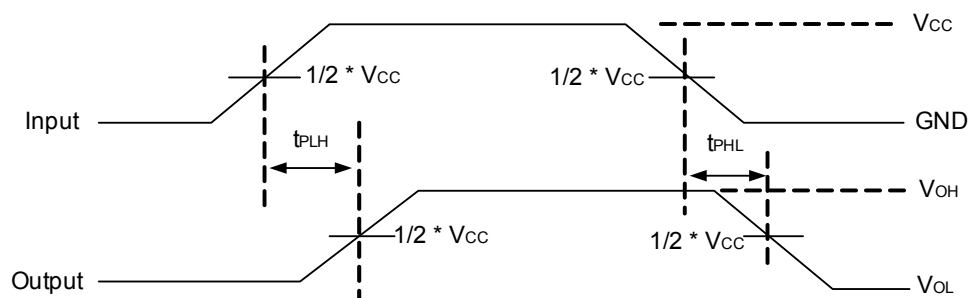

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.