

Features

Unregulated Converters

- EN 60950 certified, rated for 250VAC
- UL-60950-1 / CSA C22.2 certified
- 5.2kVDC Isolation for 1 Minute
- Optional Continuous Short Circuit Protected
- Wide Temperature Performance at full 1 Watt Load, -40°C to +85°C
- 2 Chamber Transformer System
- UL94V-0 Package Material
- Efficiency to 80%

Selection Guide

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency
SIP 7	(VDC)	(VDC)	(mA)	(%)
RxxP3.3S	5, 9, 12, 15, 24	3.3	303	70
RxxP05S	5, 9, 12, 15, 24	5	200	70-75
RxxP09S	5, 9, 12, 15, 24	9	111	70-75
RxxP12S	5, 9, 12, 15, 24	12	84	70-75
RxxP15S	5, 9, 12, 15, 24	15	66	75-80
RxxP3.3D	5, 9, 12, 15, 24	±3.3	±151	70
RxxP05D	5, 9, 12, 15, 24	±5	±100	70-75
RxxP09D	5, 9, 12, 15, 24	±9	±55	70-75
RxxP12D	5, 9, 12, 15, 24	±12	±41	70-75
RxxP15D	5, 9, 12, 15, 24	±15	±33	75-80

xx = Input Voltage

* add Suffix "P" for Continuous Short Circuit Protection, e.g. R05P05S/P, R05P05D/P

Description

The RxxPxxS_D Series of DC/DC Converters are fully certified to EN 60950/ UL-60950-1 and CSA C22.2. This makes them ideal for all telecom and safety applications where approved isolation is required.

Specifications

(measured at $T_A = 25^\circ\text{C}$, at nominal input voltage and rated output current unless otherwise specified)


Input Voltage Range	±10%		
Output Voltage Accuracy	±5%		
Line Voltage Regulation	1.2%/1% of Vin typ.		
Load Voltage Regulation (10% to 100% full load)	3.3, 5V output types	15% max.	
	other output types	10% max.	
Output Ripple and Noise (20MHz BW)	200mVp-p max.		
Operating Frequency	20kHz min. / 50kHz typ. / 85kHz max.		
Efficiency at Full Load	65% min. / 75% typ.		
No Load Power Consumption	148mW min. / 220mW typ. / 355mW max.		
Isolation Voltage	(tested for 1 minute)	5200VDC min.	
Rated Working Voltage	(long term isolation)	see Application Notes	
Isolation Capacitance	4pF min. / 10pF max.		
Isolation Resistance	15 GΩ min.		
Short Circuit Protection	1 Second		
P-Suffix	Continuous		
Operating Temperature Range (free air convection)	-40°C to +85°C (see Graph)		
Storage Temperature Range	-55°C to +125°C		
Relative Humidity	95% RH		
Package Weight	4.3g		
MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	2974 x 10 ³ hours
(+85°C)		using MIL-HDBK 217F	728 x 10 ³ hours

ECONOLINE

DC/DC-Converter

RxxPxxS_D Series


1 Watt SIP 7 Single & Dual Output

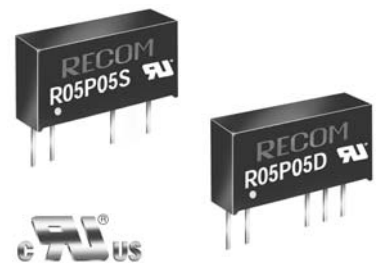

EN-60950-1 Certified
UL-60950-1 Certified
EN-60601-1 Certified



RECOM

Derating-Graph (Ambient Temperature)


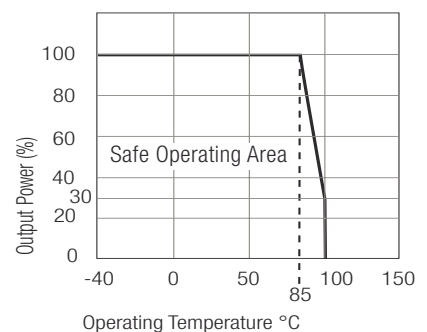


Typical Characteristics, Tolerance Envelope



RxxP05/09S

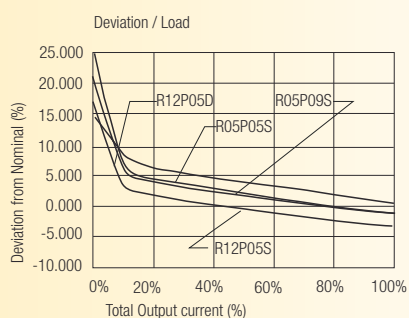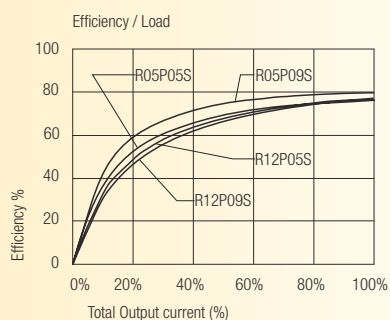



RxxP12/15S

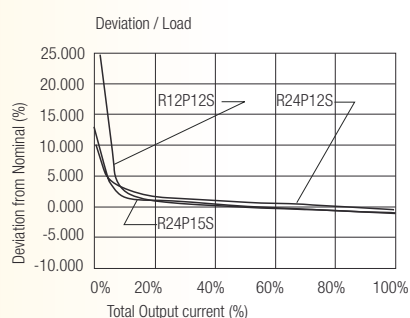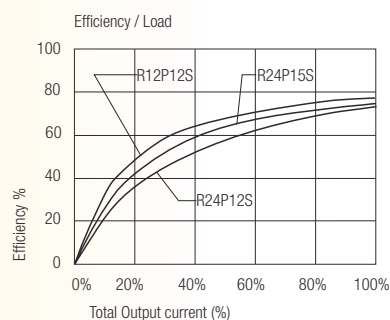

RxxP05/09D

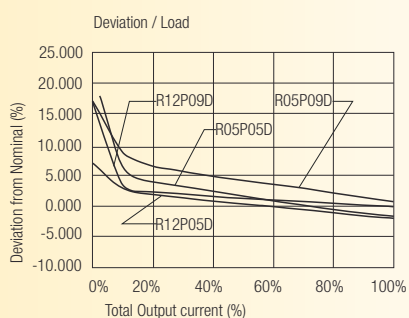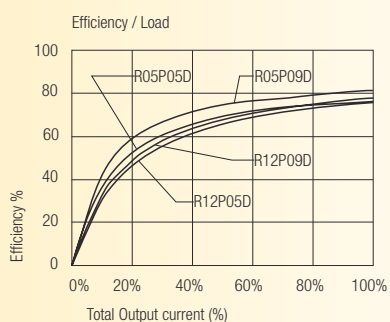






RxxP12/15D

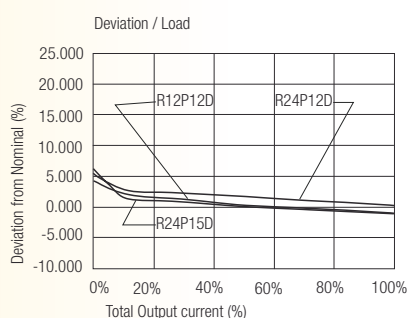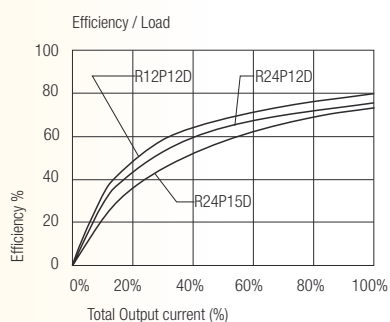


Package Style and Pinning (mm)

7 PIN SIP Package

3rd angle projection



Recommended Footprint Details



Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No Pin	Com
7	+Vout	+Vout

XX.X ± 0.5 mm
XX.XX ± 0.25 mm