

2012 Size


800/850 MHz

Chip Multilayer Coupler


FSLC-S090M-A1



## Equivalent Circuits

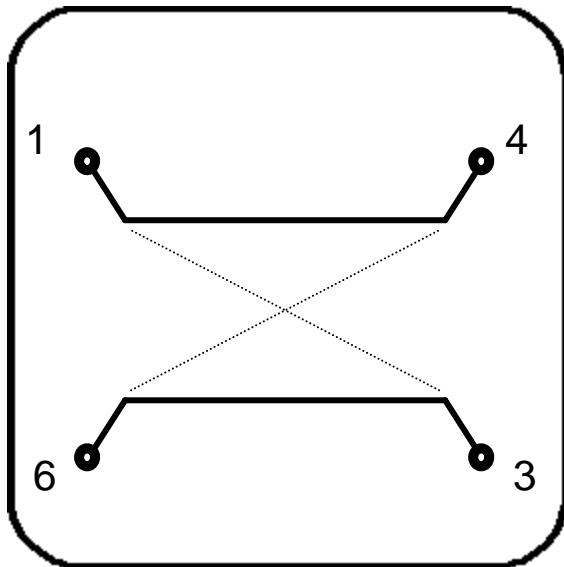

## Shape & Size

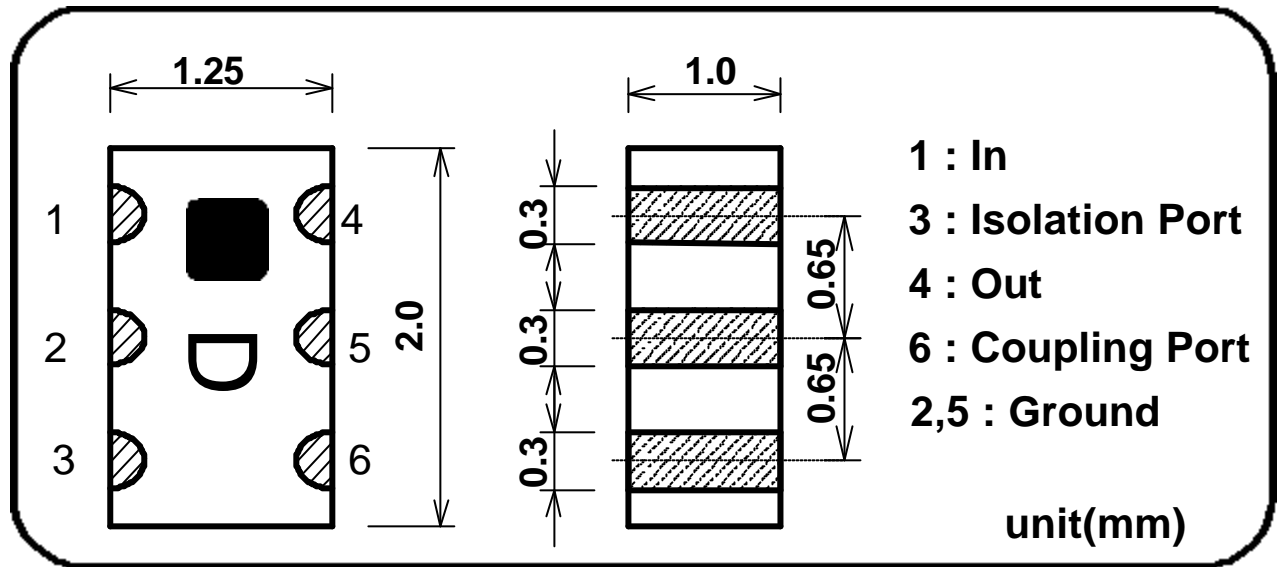


## Specifications

Part Name: FSLC-S090M-A1

Frequency Range	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
800-850MHz	20.0 +/- 1.5dB	0.3dB Max. (0.15dB Typ.)	27dB Typ.	17dB Min. (25dB Typ.)	1W Max. (CW)	-35 to +85 deg.C





# FOOT PATTERN

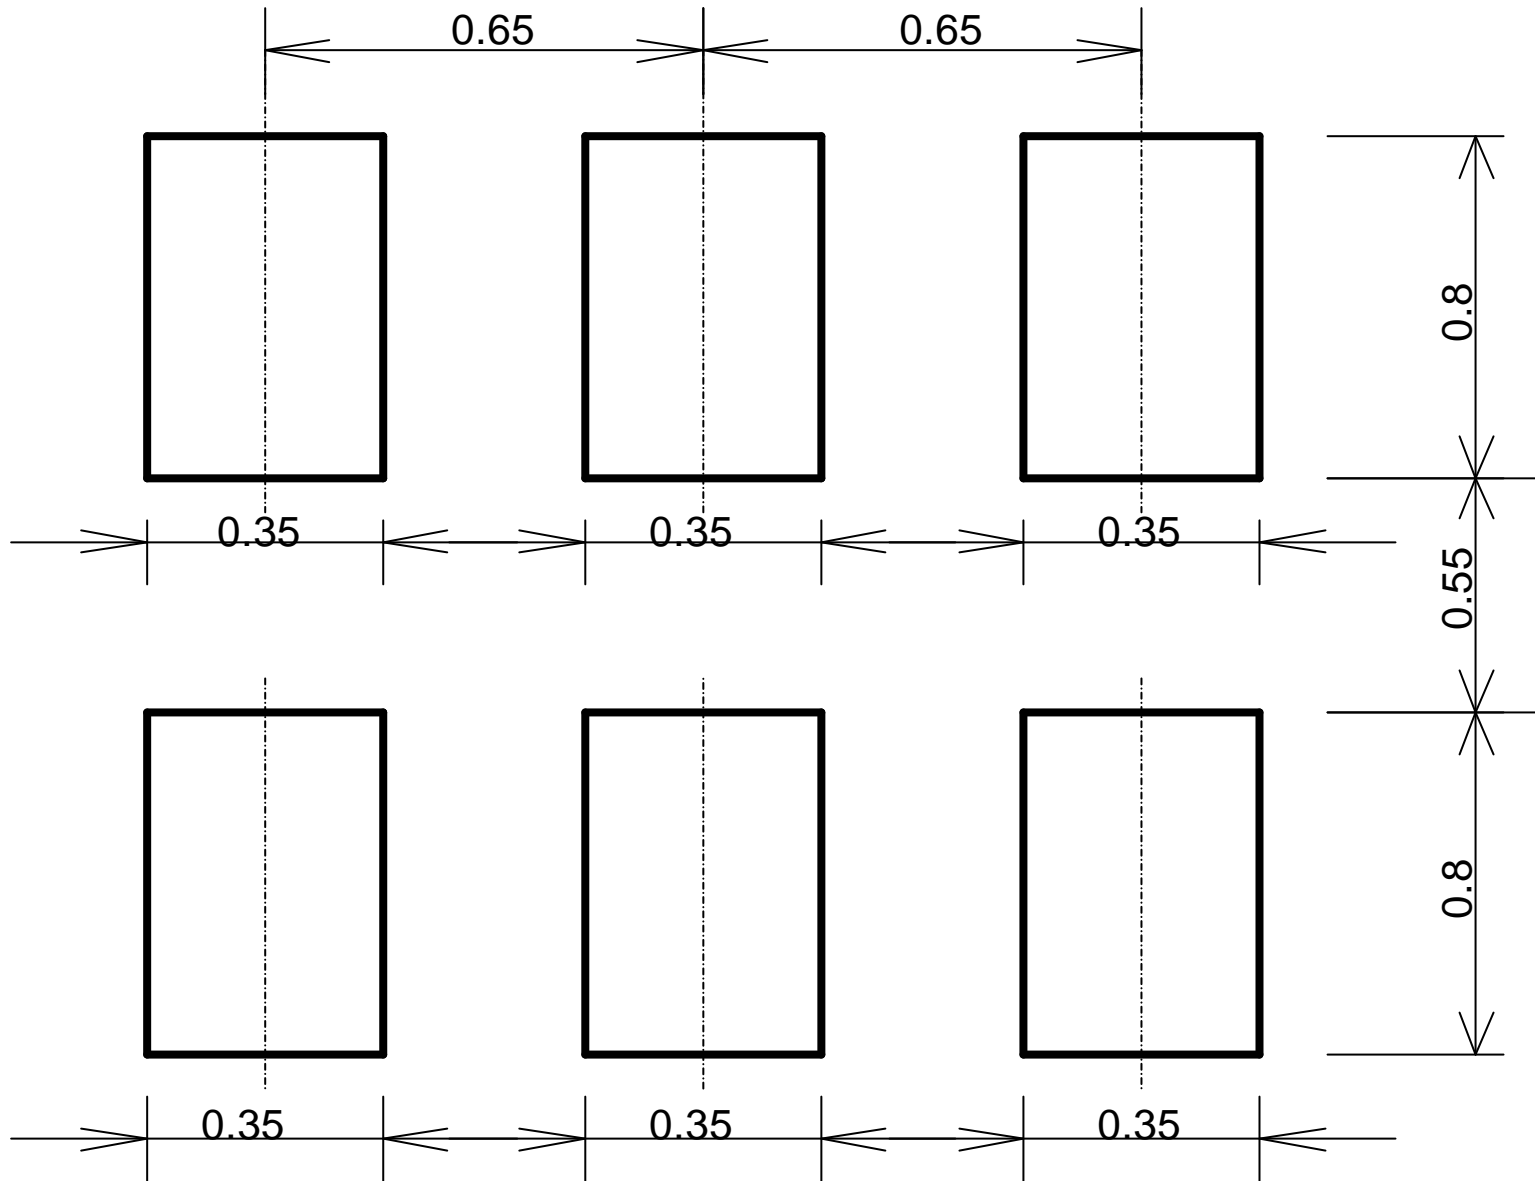

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S090M-A1-0406A

# FSLC-S090M-A1 Sample Data

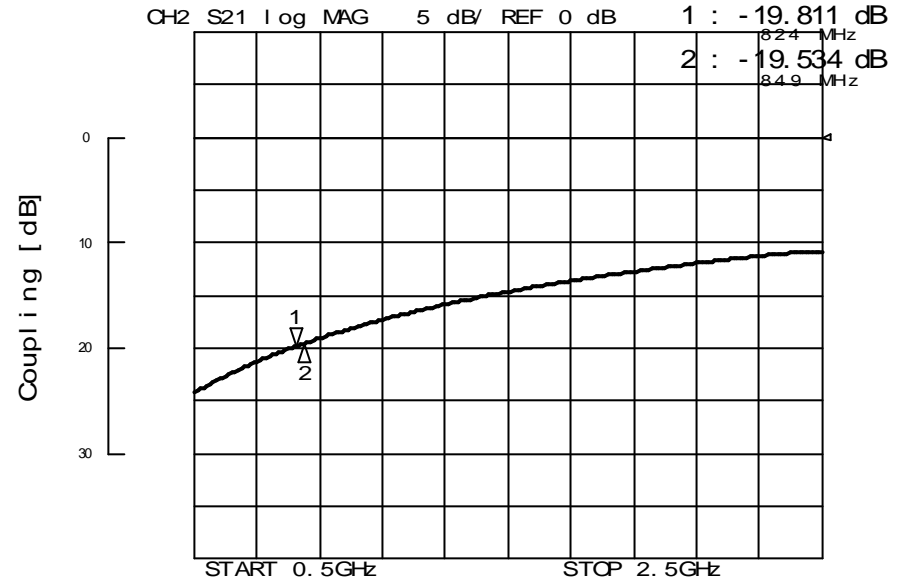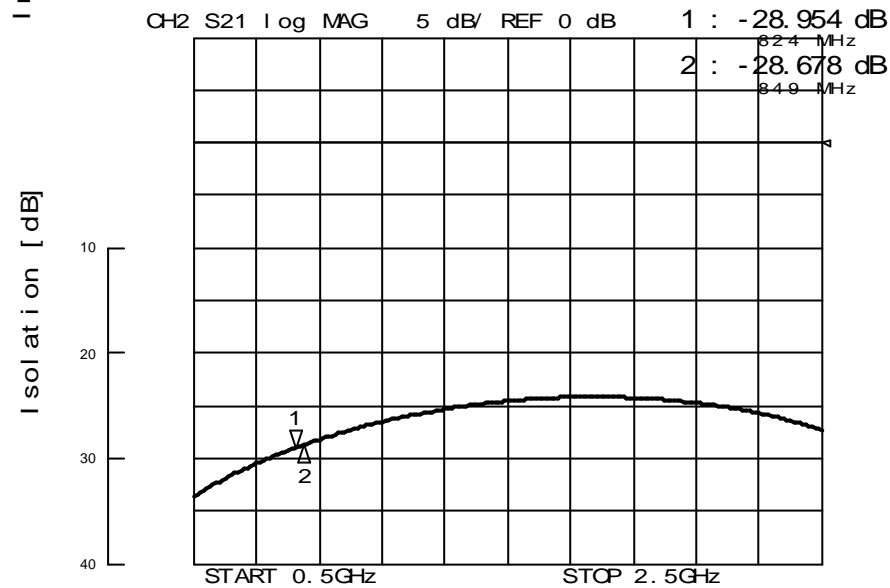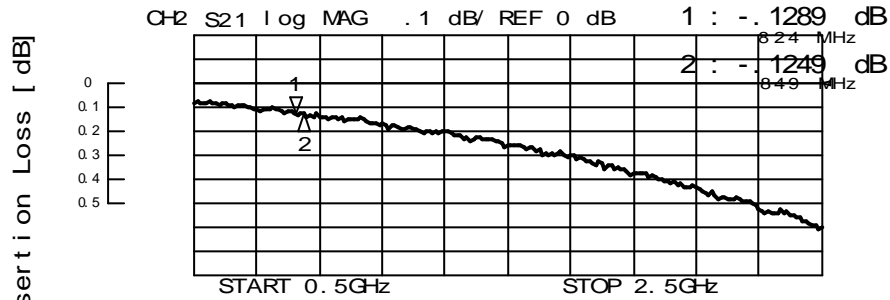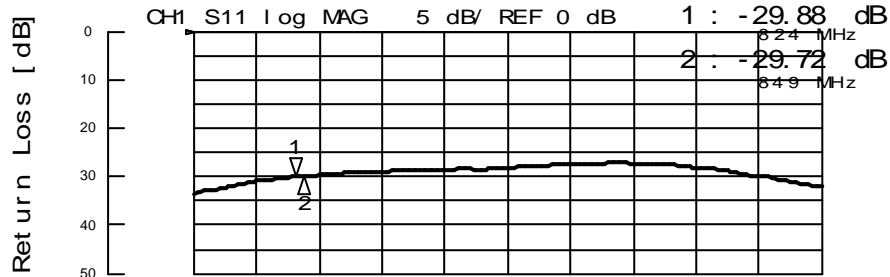

800/850 MHz  
 Chip Multilayer Coupler "FSLC-S090M-A1"

