TEXAS NSTRUMENTS www.ti.com

## 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD (HBM) PROTECTION

SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

## FEATURES


- RS-232 Bus-Pin ESD Protection Exceeds ±15 kV Using Human-Body Model (HBM)
- Meets or Exceeds the Requirements of TIA/EIA-232-F and ITU v.28 Standards
- Operates With 3-V to 5.5-V V<sub>CC</sub> Supply
- Operates up to 400 kbit/s
- Five Drivers and Three Receivers
- Auto-Powerdown Plus Feature Enables Flexible Power-Down Mode
- Low Standby Current . . . 1 µA Typical
- External Capacitors . . . 4  $\times$  0.1  $\mu\text{F}$
- Accepts 5-V Logic Input With 3.3-V Supply
- Always-Active Noninverting Receiver Output (ROUT1B)
- Alternative High-Speed Pin-Compatible Device (1 Mbit/s) for SNx5C3238
- ESD Protection for RS-232 Interface Pins - ±15 kV – Human-Body Model (HBM)
  - $-\pm 8$  kV IEC61000-4-2, Contact Discharge
  - $-\pm$ 15 kV IEC61000-4-2, Contact Discharge

## **APPLICATIONS**

- Battery-Powered Systems
- PDAs
- Notebooks
- Subnotebooks
- Laptops
- Palmtop PCs
- Hand-Held Equipment
- Modems
- Printers

DB, DW, OR PW PACKAGE (TOP VIEW)							
C2+ GND C2- DOUT1 DOUT2 DOUT3 RIN1 RIN2 DOUT4 RIN3 DOUT5 FORCEON	1 2 3 4 5 6 7 8 9 10 11 12 13 14	28 27 26 25 24 23 22 21 20 19 18 17 16 15	C1+ V+ V <sub>CC</sub> C1- DIN1 DIN2 DIN3 ROUT1 ROUT2 DIN4 ROUT3 DIN5 ROUT1B				
	••	.0					



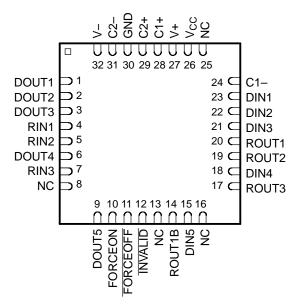

## **DESCRIPTION/ORDERING INFORMATION**

The MAX3238E consists of five line drivers, three line receivers, and a dual charge-pump circuit with  $\pm$ 15-kV ESD (HBM) protection on the driver output (DOUT) and receiver input (RIN) terminals. The device meets the requirements of TIA/EIA-232-F and provides the electrical interface between notebook and subnotebook computer applications. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. In addition, the device includes an always-active noninverting output (ROUT1B), which allows applications using the ring indicator to transmit data while the device is powered down. This device operates at data signaling rates up to 250 kbit/s and a maximum of 30-V/ $\mu$ s driver output slew rate.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

# MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm 15\text{-kV}$ ESD (HBM) PROTECTION



SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

## **DESCRIPTION/ORDERING INFORMATION (CONTINUED)**

Flexible control options for power management are featured when the serial port and driver inputs are inactive. The auto-powerdown plus feature functions when FORCEON is low and FORCEOFF is high. During this mode of operation, if the device does not sense valid signal transitions on all receiver and driver inputs for approximately 30 s, the built-in charge pump and drivers are powered down, reducing the supply current to 1  $\mu$ A. By disconnecting the serial port or placing the peripheral drivers off, auto-powerdown plus occurs if there is no activity in the logic levels for the driver inputs. Auto-powerdown plus can be disabled when FORCEON and FORCEOFF are high. With auto-powerdown plus enabled, the device activates automatically when a valid signal is applied to any receiver or driver input. INVALID is high (valid data) if any receiver input voltage is greater than 2.7 V or less than -2.7 V, or has been between -0.3 V and 0.3 V for less than 30  $\mu$ s. Refer to Figure 5 for receiver input levels.

T <sub>A</sub>	PAC	CKAGE <sup>(1)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	SSOP – DB	Tube of 50	MAX3238ECDB	MAX3238EC
	550P - DB	Reel of 2000	MAX3238ECDBR	
0°C to 70°C	TSSOP – PW	Tube of 50	MAX3238ECPW	MP238EC
	1330F - FW	Reel of 2000	MAX3238ECPWR	WF230EC
	SOIC – DW	Reel of 2000	MAX3238ECDWR	MAX3238EC
	QFN – RHB	Reel of 2000	MAX3238ECRHBR	Preview
	SSOP – DB	Tube of 50	MAX3238EIDB	MAX3238EI
	330F - DB	Reel of 2000	MAX3238EIDBR	INIAA3230E1
40°C to 95°C	TSSOP – PW	Tube of 50	MAX3238EIPW	- MP238EI
-40 C 10 85 C	1330F - FW	Reel of 2000	MAX3238EIPWR	
	SOIC – DW	Reel of 2000	MAX3238ICDWR	MAX3238EI
	QFN – RHB	Reel of 2000	MAX3238EIRHBR	Preview

#### **ORDERING INFORMATION**

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

## MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD (HBM) PROTECTION

SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

## **FUNCTION TABLES**

### Each Driver<sup>(1)</sup>

		INPUTS			
DIN	FORCEON	FORCEOFF	TIME ELAPSED SINCE LAST RIN OR DIN TRANSITION	OUTPUT DOUT	DRIVER STATUS
Х	Х	L	X	Z	Powered off
L	Н	Н	X	Н	Normal operation with
Н	н	н	x	L	auto-powerdown plus disabled
L	L	Н	<30 s	Н	Normal operation with
Н	L	н	<30 s	L	auto-powerdown plus enabled
L	L	Н	>30 s	Z	Powered off by
н	L	Н	>30 s	Z	auto-powerdown plus feature

(1) H = high level, L = low level, X = irrelevant, Z = high impedance

#### Each Receiver<sup>(1)</sup>


		INPUTS		OUT	PUTS	
RIN1	RIN2-RIN3	FORCEOFF	TIME ELAPSED SINCE LAST RIN OR DIN TRANSITION	ROUT1B	ROUT2 AND ROUT3	RECEIVER STATUS
L	Х	L	Х	L	Z	Powered off while
н	Х	L	х	Н	Z	ROUT1B is active
L	L	Н	<30 s	L	н	
L	н	н	<30 s	L	L	Normal operation with
Н	L	н	<30 s	Н	н	auto-powerdown plus
Н	н	н	<30 s	Н	L	disabled/enabled
Open	Open	н	<30 s	L	н	

(1) H = high level, L = low level, X = irrelevant, Z = high impedance (off), Open = input disconnected or connected driver off

# MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm$ 15-kV ESD (HBM) PROTECTION



SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

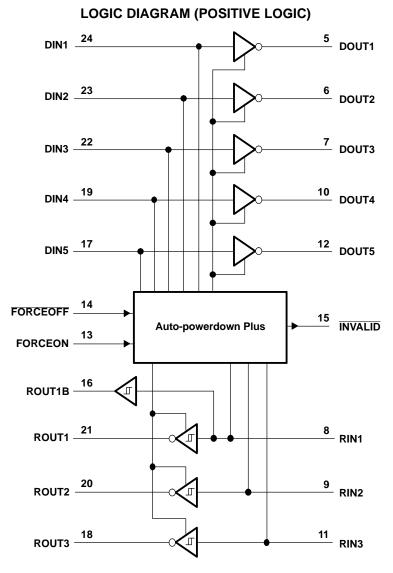

## Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range <sup>(2)</sup>		-0.3	6	V
V+	Positive-output supply voltage range <sup>(2)</sup>		-0.3	7	V
V–	Negative-output supply voltage range <sup>(2)</sup>		0.3	-7	V
V+ - V-	Supply voltage difference <sup>(2)</sup>			13	V
V		Driver (FORCEOFF, FORCEON)	-0.3	6	V
V <sub>I</sub> I	Input voltage range	Receiver	-25	25	v
M		Driver	-13.2	13.2	V
Vo	Output voltage range	Receiver (INVALID)	-0.3	13.2 V <sub>CC</sub> + 0.3	V
		DB package		62	
0	Declare thermal impedance $(3)(4)$	DW package		46	°C/W
$\theta_{JA}$	Package thermal impedance <sup>(3)(4)</sup>	PW package		62	-C/W
		RHB package		TBD	
TJ	Operating virtual junction temperature	· · · ·		150	°C
T <sub>stg</sub>	Storage temperature range		-65	150	°C

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

All voltages are with respect to network GND. (2)

Maximum power dissipation is a function of  $T_{I}(max)$ ,  $\theta_{IA}$ , and  $T_{A}$ . The maximum allowable power dissipation at any allowable ambient (3) temperature is  $P_D = (T_J(max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.

The package thermal impedance is calculated in accordance with JESD 51-7. (4)

## Recommended Operating Conditions<sup>(1)</sup>

See Figure 6

				MIN	NOM	MAX	UNIT
	Supply voltage		$V_{CC} = 3.3 V$	3	3.3	3.6	V
	upply voltage       DIN, FORCEOFF,         river and control high-level input voltage       DIN, FORCEOFF,         river and control low-level input voltage       DIN, FORCEOFF,         eceiver input voltage       DIN, FORCEOFF,	$V_{CC} = 5 V$	4.5	5	5.5	v	
V	Driver and control high lovel input veltage	DIN, FORCEOFF,	$V_{CC} = 3.3 V$	2		5.5	V
VIH	Driver and control high-level linput voltage	FORCEON	$V_{CC} = 5 V$	2.4		5.5	v
$V_{\text{IL}}$	Driver and control low-level input voltage	DIN, FORCEOFF, FORC	CEON	0		0.8	V
VI	Receiver input voltage			-25		25	V
Ŧ	Operating free air temperature		MAX3238EC	0		70	°C
T <sub>A</sub>	Operating free-air temperature		MAX3238EI	-40		85	

(1) Testing supply conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F and C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V ± 0.5 V.

## Electrical Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 6)

	PARA	METER	TEST CONDITIONS	MIN	TYP <sup>(2)</sup>	MAX	UNIT
I <sub>I</sub>	Input leakage current	FORCEOFF, FORCEON			±0.01	±1	μA
		Auto-powerdown plus disabled	No load, FORCEOFF and FORCEON at $V_{CC}$		0.5	2	mA
I <sub>CC</sub>	Supply current	Powered off	No load, FORCEOFF at GND		1	10	
	(T <sub>A</sub> = 25°C)	Auto-powerdown plus enabled	No load, FORCEOFF at V <sub>CC</sub> , FORCEON at GND, All RIN are open or grounded		1	10	μA

Testing supply conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V \pm 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V \pm 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V \pm 0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V \pm 0. (1) and C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V ± 0.5 V. All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.

(2)

# MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm 15\text{-kV}$ ESD (HBM) PROTECTION



SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

## **DRIVER SECTION**

## Electrical Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 6)

	PARAMETER	TE	ST CONDITIONS	6	MIN	TYP <sup>(2)</sup>	MAX	UNIT
V <sub>OH</sub>	High-level output voltage	All DOUT at $R_L = 3 \ k\Omega$ to	GND		5	5.4		V
V <sub>OL</sub>	Low-level output voltage	All DOUT at $R_L = 3 \ k\Omega$ to	GND		-5	-5.4		V
I <sub>IH</sub>	High-level input current	$V_{I} = V_{CC}$				±0.01	±1	μA
I	Low-level input current	V <sub>I</sub> at GND				±0.01	±1	μΑ
	Short-circuit output current <sup>(3)</sup>	V <sub>CC</sub> = 3.6 V,	$V_{O} = 0 V$			±35	±60	mA
I <sub>OS</sub>	Short-circuit output current	V <sub>CC</sub> = 5.5 V,	$V_0 = 0 V$			±40	±100	ША
r <sub>o</sub>	Output resistance	$V_{CC}$ , V+, and V- = 0 V,	$V_0 = \pm 2 V$		300	10M		Ω
		FORCEOFF = GND	$V_0 = \pm 12 V$ ,	$V_{CC}$ = 3 V to 3.6 V			±25	۸
I <sub>OZ</sub>	Output leakage current	FURGEUFF = GND	$V_{O} = \pm 10 V$ ,	$V_{CC}$ = 4.5 V to 5.5 V			±25	μA

(1) Testing supply conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F and C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V ± 0.5 V.

(2) All typical values are at  $V_{CC} = 3.3$  V or  $V_{CC} = 5$  V, and  $T_A = 25^{\circ}C$ .

(3) Short-circuit durations should be controlled to prevent exceeding the device absolute power dissipation ratings, and not more than one output should be shorted at a time.

## Switching Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 6)

	PARAMETER	TEST	CONDITIONS	MIN	TYP <sup>(2)</sup>	MAX	UNIT
	Maximum data rate	C <sub>L</sub> = 1000 pF, One DOUT switching,	R <sub>L</sub> = 3 kΩ, See Figure 1	250	400		kbit/s
t <sub>sk(p)</sub>	Pulse skew <sup>(3)</sup>	C <sub>L</sub> = 150 pF to 2500 pF, See Figure 2	$R_L = 3 k\Omega$ to 7 k $\Omega$ ,		100		ns
SR(tr)	Slew rate, transition region	V <sub>CC</sub> = 3.3 V,	$C_{L} = 150 \text{ pF} \text{ to } 1000 \text{ pF}$	6		30	V/µs
35(11)	(see Figure 1)	$R_L = 3 k\Omega$ to 7 k $\Omega$	$C_{L} = 150 \text{ pF} \text{ to } 2500 \text{ pF}$	4		30	v/µs

(1) Testing supply conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F and C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V ± 0.5 V.

(2) All typical values are at  $V_{CC} = 3.3$  V or  $V_{CC} = 5$  V, and  $T_A = 25^{\circ}$ C.

(3) Pulse skew is defined as  $|t_{PLH} - t_{PHL}|$  of each channel of the same device.

## **ESD** Protection

PARAMETER	TEST CONDITIONS	TYP	UNIT
	HBM	±15	
DOUT	IEC 61000-4-2, Air-Gap Discharge	±15	kV
	IEC 61000-4-2, Contact Discharge	±8	

## **RECEIVER SECTION**

## Electrical Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 6)

	PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(2)</sup>	MAX	UNIT
V <sub>OH</sub>	High-level output voltage	$I_{OH} = -1 \text{ mA}$	$V_{CC} - 0.6$	V <sub>CC</sub> – 0.1		V
V <sub>OL</sub>	Low-level output voltage	I <sub>OL</sub> = 1.6 mA			0.4	V
V	Desitive going input threshold voltage	$V_{CC} = 3.3 V$		1.5	2.4	V
V <sub>IT+</sub>	Positive-going input threshold voltage	$V_{CC} = 5 V$		1.8	2.4	v
V	Negative going input threshold voltage	$V_{CC} = 3.3 V$	0.6	1.2		V
V <sub>IT-</sub>	Negative-going input threshold voltage	$V_{CC} = 5 V$	0.8	1.5		v
V <sub>hys</sub>	Input hysteresis (V <sub>IT+</sub> – V <sub>IT</sub> –)			0.3		V
I <sub>OZ</sub>	Output leakage current (except ROUT1B)	FORCEOFF = 0 V		±0.05	±10	μA
r <sub>i</sub>	Input resistance	$V_{I} = \pm 3 \text{ V to } \pm 25 \text{ V}$	3	5	7	kΩ

(1) Testing supply conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.3 V; and C1 = 0.047  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 V  $\pm$  0.15 V; C1–C4 = 0.24  $\mu$ F at V<sub>CC</sub> = 3.3 and C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V ± 0.5 V. All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.

(2)

## Switching Characteristics<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TYP <sup>(2)</sup>	UNIT
t <sub>PLH</sub>	Propagation delay time, low- to high-level output	C <sub>L</sub> = 150 pF, See Figure 3	150	ns
t <sub>PHL</sub>	Propagation delay time, high- to low-level output	C <sub>L</sub> = 150 pF, See Figure 3	150	ns
t <sub>en</sub>	Output enable time	$C_L = 150 \text{ pF}, R_L = 3 \text{ k}\Omega$ , See Figure 4	200	ns
t <sub>dis</sub>	Output disable time	$C_L = 150 \text{ pF}, R_L = 3 \text{ k}\Omega$ , See Figure 4	200	ns
t <sub>sk(p)</sub>	Pulse skew <sup>(3)</sup>	See Figure 3	50	ns

Testing supply conditions are C1–C4 = 0.1  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.15 V; C1–C4 = 0.22  $\mu$ F at V<sub>CC</sub> = 3.3 V ± 0.3 V; and C1 = 0.047  $\mu$ F and C2–C4 = 0.33  $\mu$ F at V<sub>CC</sub> = 5 V ± 0.5 V. (1)

(2) All typical values are at  $V_{CC} = 3.3$  V or  $V_{CC} = 5$  V, and  $T_A = 25^{\circ}C$ . (3) Pulse skew is defined as  $|t_{PLH} - t_{PHL}|$  of each channel of the same device.

## **ESD** Protection

PARAMETER	TEST CONDITIONS	TYP	UNIT
	НВМ	±15	
RIN	IEC 61000-4-2, Air-Gap Discharge	±15	kV
	IEC 61000-4-2, Contact Discharge	±8	

# MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm 15\text{-kV}$ ESD (HBM) PROTECTION



SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

## AUTO-POWERDOWN PLUS SECTION

### **Electrical Characteristics**

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

	PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
$V_{\text{T+(valid)}}$	Receiver input threshold for INVALID high-level output voltage	FORCEON = GND, $\overline{\text{FORCEOFF}} = V_{CC}$		2.7	V
V <sub>T-(valid)</sub>	Receiver input threshold for INVALID high-level output voltage	FORCEON = GND, $\overline{FORCEOFF} = V_{CC}$	-2.7		V
V <sub>T(invalid)</sub>	Receiver input threshold for INVALID low-level output voltage	FORCEON = GND, $\overline{FORCEOFF} = V_{CC}$	-0.3	0.3	V
V <sub>OH</sub>	INVALID high-level output voltage	$I_{OH} = -1 \text{ mA}$ , FORCEON = GND, FORCEOFF = $V_{CC}$	V <sub>CC</sub> – 0.6		V
V <sub>OL</sub>	INVALID low-level output voltage	$I_{OL}$ = 1.6 mA, FORCEON = GND, FORCEOFF = V <sub>CC</sub>		0.4	V

## **Switching Characteristics**

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)


	PARAMETER	MIN	TYP <sup>(1)</sup>	MAX	UNIT
t <sub>valid</sub>	Propagation delay time, low- to high-level output		0.1		μs
t <sub>invalid</sub>	Propagation delay time, high- to low-level output		50		μs
t <sub>en</sub>	Supply enable time		25		μs
t <sub>dis</sub>	Receiver or driver edge to auto-powerdown plus	15	30	60	S

(1) All typical values are at V\_{CC} = 3.3 V or V\_{CC} = 5 V, and T\_A = 25 ^{\circ}C.

## MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD (HBM) PROTECTION

SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

## PARAMETER MEASUREMENT INFORMATION

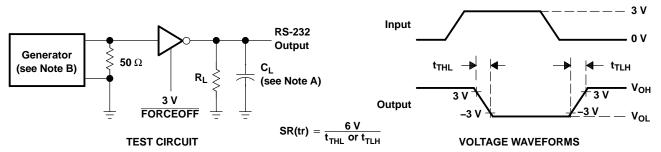


A. C<sub>L</sub> includes probe and jig capacitance.

TEXAS

TRUMENTS www.ti.com

B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O = 50 \Omega$ , 50% duty cycle,  $t_r \le 10$  ns,  $t_f \le 10$  ns.

#### Figure 1. Driver Slew Rate

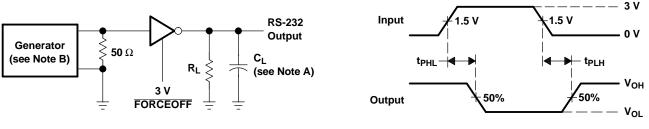


#### **TEST CIRCUIT**

VOLTAGE WAVEFORMS

- A. C<sub>L</sub> includes probe and jig capacitance.
- B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O = 50 \Omega$ , 50% duty cycle,  $t_r \le 10$  ns,  $t_f \le 10$  ns.

#### Figure 2. Driver Pulse Skew

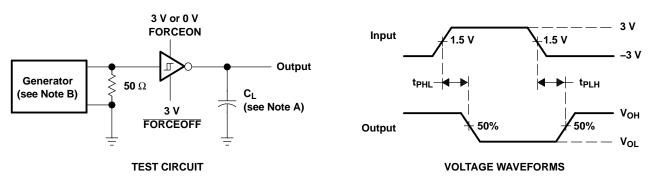


- A. C<sub>L</sub> includes probe and jig capacitance.
- B. The pulse generator has the following characteristics:  $Z_O = 50 \ \Omega$ , 50% duty cycle,  $t_r \le 10 \text{ ns}$ ,  $t_f \le 10 \text{ ns}$ .

### Figure 3. Receiver Propagation Delay Times

# MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm 15\text{-kV}$ ESD (HBM) PROTECTION

SLLS710A-FEBRUARY 2006-REVISED APRIL 2006

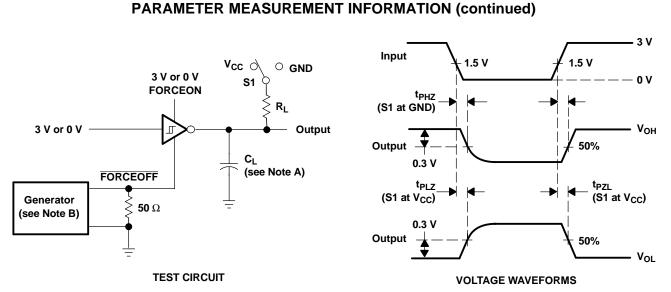

TEXAS

INSTRUMENTS www.ti.com


- A. C<sub>L</sub> includes probe and jig capacitance.
- B. The pulse generator has the following characteristics:  $Z_O = 50 \ \Omega$ , 50% duty cycle,  $t_r \le 10 \text{ ns}$ .
- C.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- D.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .


#### Figure 4. Receiver Enable and Disable Times

## MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD (HBM) PROTECTION


SLLS710A-FEBRUARY 2006-REVISED APRIL 2006


## PARAMETER MEASUREMENT INFORMATION (continued)

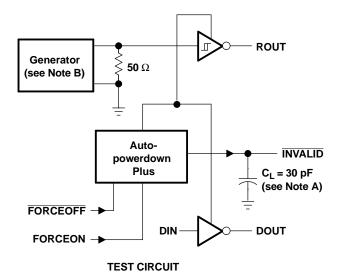

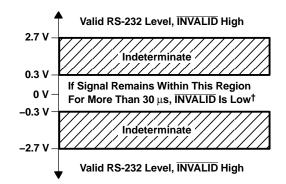

 $^\dagger$  Auto-powerdown plus disables drivers and reduces supply current to 1  $\mu A.$ 



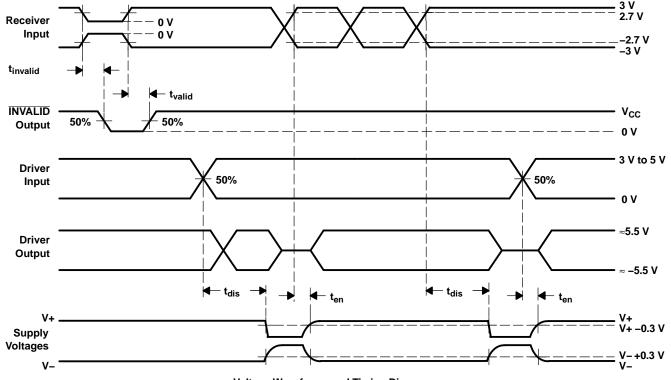

Voltage Waveforms and Timing Diagrams

Figure 5. INVALID Propagation-Delay Times and Supply-Enabling Time

# MAX3238E 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH $\pm$ 15-kV ESD (HBM) PROTECTION

SLLS710A-FEBRUARY 2006-REVISED APRIL 2006



**APPLICATION INFORMATION** 

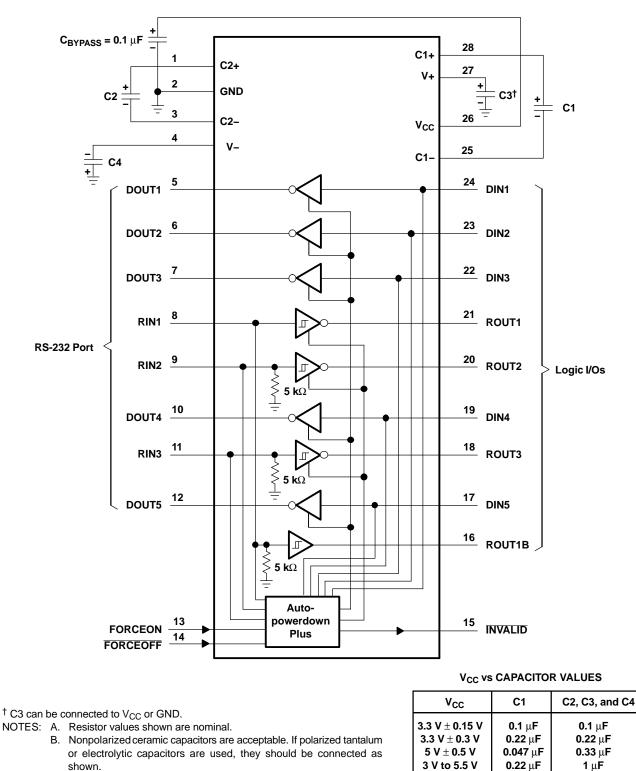


Figure 6. Typical Operating Circuit and Capacitor Values



10-Jun-2014

## **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package	Pins	Package	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
MAX3238ECDB	ACTIVE	SSOP	DB	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3238EC	Samples
MAX3238ECDBR	ACTIVE	SSOP	DB	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3238EC	Samples
MAX3238ECDWR	ACTIVE	SOIC	DW	28	1000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3238EC	Samples
MAX3238ECPW	ACTIVE	TSSOP	PW	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	MP238EC	Samples
MAX3238ECPWR	ACTIVE	TSSOP	PW	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	MP238EC	Samples
MAX3238EIDB	ACTIVE	SSOP	DB	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MAX3238EI	Samples
MAX3238EIDBG4	ACTIVE	SSOP	DB	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MAX3238EI	Samples
MAX3238EIDBR	ACTIVE	SSOP	DB	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MAX3238EI	Samples
MAX3238EIDW	ACTIVE	SOIC	DW	28	20	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MAX3238EI	Samples
MAX3238EIDWR	ACTIVE	SOIC	DW	28	1000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MAX3238EI	Samples
MAX3238EIPW	ACTIVE	TSSOP	PW	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP238EI	Samples
MAX3238EIPWG4	ACTIVE	TSSOP	PW	28	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP238EI	Samples
MAX3238EIPWR	ACTIVE	TSSOP	PW	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP238EI	Samples
MAX3238EIPWRG4	ACTIVE	TSSOP	PW	28	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP238EI	Samples

<sup>(1)</sup> The marketing status values are defined as follows: **ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.



www.ti.com

10-Jun-2014

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(<sup>5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## PACKAGE MATERIALS INFORMATION

www.ti.com

Texas Instruments

## TAPE AND REEL INFORMATION



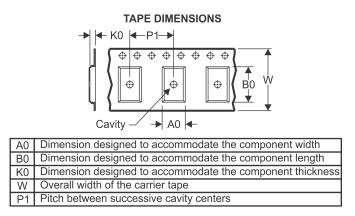

## QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal		-			-							
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
MAX3238ECDBR	SSOP	DB	28	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
MAX3238ECDWR	SOIC	DW	28	1000	330.0	32.4	11.35	18.67	3.1	16.0	32.0	Q1
MAX3238ECPWR	TSSOP	PW	28	2000	330.0	16.4	6.9	10.2	1.8	12.0	16.0	Q1
MAX3238EIDBR	SSOP	DB	28	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
MAX3238EIDWR	SOIC	DW	28	1000	330.0	32.4	11.35	18.67	3.1	16.0	32.0	Q1
MAX3238EIPWR	TSSOP	PW	28	2000	330.0	16.4	6.9	10.2	1.8	12.0	16.0	Q1

TEXAS INSTRUMENTS

www.ti.com

## PACKAGE MATERIALS INFORMATION

5-Feb-2013



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
MAX3238ECDBR	SSOP	DB	28	2000	367.0	367.0	38.0
MAX3238ECDWR	SOIC	DW	28	1000	367.0	367.0	55.0
MAX3238ECPWR	TSSOP	PW	28	2000	367.0	367.0	38.0
MAX3238EIDBR	SSOP	DB	28	2000	367.0	367.0	38.0
MAX3238EIDWR	SOIC	DW	28	1000	367.0	367.0	55.0
MAX3238EIPWR	TSSOP	PW	28	2000	367.0	367.0	38.0

DW (R-PDSO-G28)

PLASTIC SMALL OUTLINE



NOTES:

A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).

D. Falls within JEDEC MS-013 variation AE.



## LAND PATTERN DATA



NOTES:

A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Refer to IPC7351 for alternate board design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



PW (R-PDSO-G28)

PLASTIC SMALL OUTLINE



NOTES:

A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 B. This drawing is subject to change without notice.

Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.

Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.

E. Falls within JEDEC MO-153



## LAND PATTERN DATA



NOTES: All linear dimensions are in millimeters. Α.

- B. This drawing is subject to change without notice.
  C. Publication IPC-7351 is recommended for alternate design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.

E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



## **MECHANICAL DATA**

MSSO002E - JANUARY 1995 - REVISED DECEMBER 2001

## DB (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-150



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		Applications	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	TI E2E Community	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconne	ctivity	

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2015, Texas Instruments Incorporated