


MOS FIELD EFFECT TRANSISTOR **2SJ184**

P-CHANNEL MOS FET FOR HIGH-SPEED SWITCHING

OUTLINE DIMENSIONS (Unit: mm)

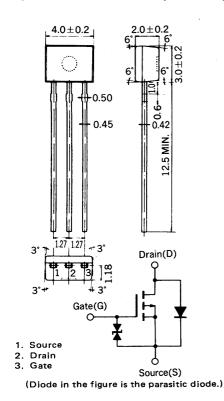

The 2SJ184, P-channel vertical type MOS FET, is a switching device which can be driven by 2.5 V power supply.

As the MOS FET is driven by low voltage and does not require consideration of driving current, it is suitable for appliances including VTR camera and headphone stereos which need power saving.

FEATURES

- Directly driven by ICs having a 3 V power supply.
- Not necessary to consider driving current because of its high input impedance.
- Possible to reduce the number of parts by omitting the bias resistor.
- Complementary to 2SK1398

QUALITY GRADE

Standard

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.


ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)


CHARACTERISTIC .	SYMBOL	RATINGS	UNIT	TEST CONDITIONS
Drain to Source Voltage	V _{DSS}	– 50	V	V _{GS} = 0
Gate to Source Voltage	V _{GSS}	∓7.0	V	V _{DS} = 0
Drain Current	I _{D(DC)}	Ŧ100	mA	
Drain Current	I _D (pulse)	‡200	mA	PW \leq 10 ms, Duty Cycle \leq 50 %
Total Power Dissipation	PT	250	mW	
Operating Temperature	T _{opt}	-55 to +80	°C	
Storage Temperature	T _{stg}	-55 to +150	°C	


ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Drain Cut-off Current	IDSS			-10	μА	V _{DS} = -50 V, V _{GS} = 0
Gate Leakage Current	IGSS			∓5	μА	V _{GS} = ∓7 V, V _{DS} = 0
Gate Cut-off Voltage	V _{GS(off)}	-1.2	-1.6	-2.0	V	$V_{DS} = -3 \text{ V, I}_{D} = -1 \mu A$
Forward Transfer Admittance	ly _{fs} l	20	42		mS	$V_{DS} = -3 \text{ V, } I_{D} = -10 \text{ mA}$
Drain to Source On-State Resistance	R _{DS(on)1}		25	40	Ω	$V_{GS} = -2.5 \text{ V, I}_{D} = -1 \text{ mA}$
Drain to Source On-State Resistance	R _{DS(on)2}		13	20	Ω	V _{GS} = -4.0 V, I _D = -10 mA
Input Capacitance	C _{iss}		22		pF	V _{DS} = -3 V, V _{GS} = 0, f = 1 MHz
Output Capacitance	Coss		12		pF	
Feedback Capacitance	C _{rss}		4		pF	
Turn-On Delay Time	^t d(on)		80		ns	$V_{GS(on)}$ = -3 V, R_{G} = 10 Ω , V_{DD} \doteqdot -3 V, I_{D} = -20 mA, R_{L} = 150 Ω
Rise Time	t _r		230		ns	
Turn-Off Delay Time	^t d(off)		40		ns	
Fall Time	t _f		70		ns	


TYPICAL CHARACTERISTICS ($T_a = 25$ °C)

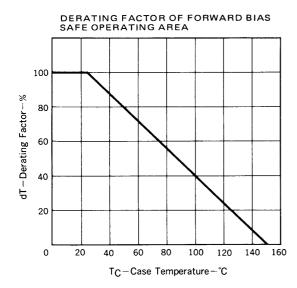


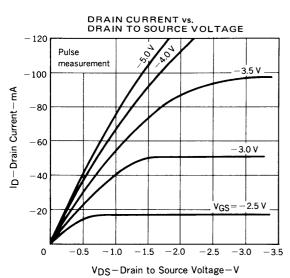


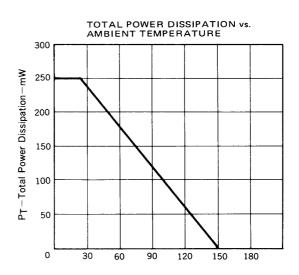



Ta-Ambient Temperature-°C

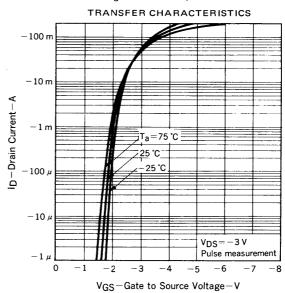


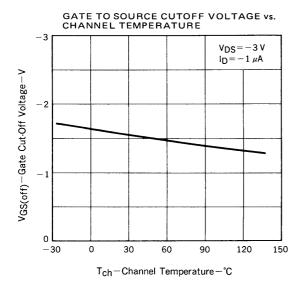


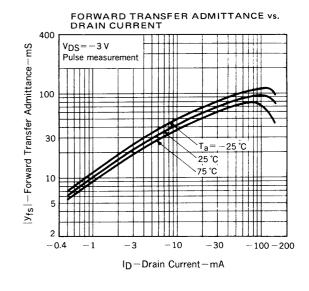

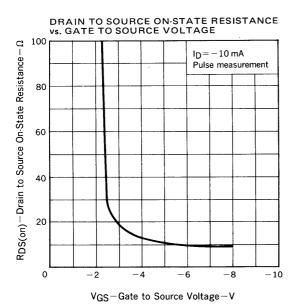


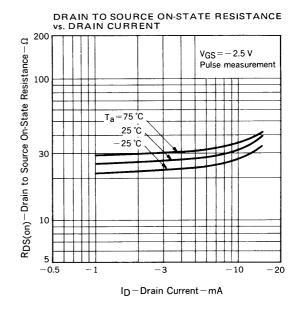


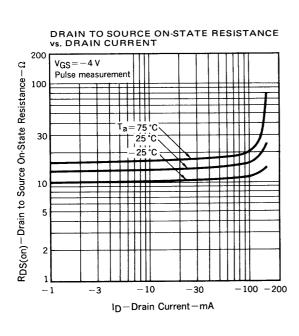

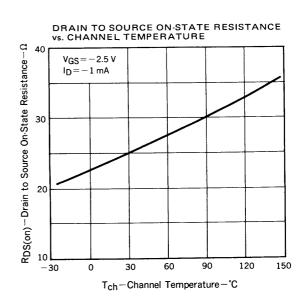




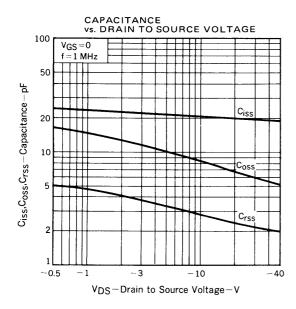


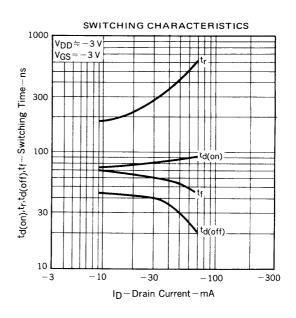

SWITCHING TIME MEASUREMENT CIRCUIT AND CONDITIONS

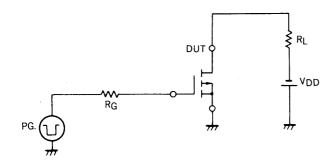



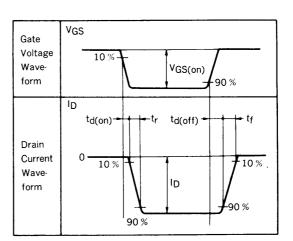

RECOMMENDED SOLDERING CONDITIONS

Solder this product under the following recommended conditions.

For soldering methods or soldering conditions other than those recommended in the table, please consult our NEC salespeople.

Insert type

Soldering method	Soldering conditions	Recommended condition code		
Wave soldering	Solder bath temperature: 260 °C max. Soldering time: 10 sec max.			

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

The devices listed in this document are not suitable for use in the field where very high reliability is required including, but not limited to, aerospace equipment, submarine cables, unclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or those inted to use "Standard", or "Special" quality grade NEC devices for the applications not intended by NEC, please contact our sales people in advance.

Application examples recommended by NEC Corporation

Standard: Data processing and office equipment, Communication equipment (terminal, mobile). Test and

Measurement equipment, Audio and Video equipment, Other consumer products, etc.

Special: Automotive and Transportation equipment, Communication equipment (trunk line), Train and

Traffic control devices, industrial robots, Burning control systems, antidisaster systems, anticrime

systems etc.