

April 1988 Revised September 2000

74F37

Quad Two-Input NAND Buffer

General Description


This device contains four independent gates, each of which performs the logic NAND function.

Ordering Code:


Order Number	Package Number	Package Description
74F37SC	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow
74F37SJ	M14D	14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74F37PC	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Logic Symbol



Connection Diagram



Unit Loading/Fan Out

Din Names	Description	U.L.	Input I _{IH} /I _{IL}	
Fill Names	Description	HIGH/LOW	Output I _{OH} /I _{OL}	
A _n , B _n	Inputs	1.0/2.0	20 μA/-1.2 mA	
Ōn	Outputs	600/106.6 (80)	-12 mA/64 mA (48 mA)	

Function Table

Inp	Output		
Α	В	ol	
L	L	Н	
L	Н	Н	
Н	L	Н	
Н	Н	L DI	

H = HIGH Voltage Level L = LOW Voltage Level

Absolute Maximum Ratings(Note 1)

Storage Temperature -65°C to $+150^{\circ}\text{C}$

 $\begin{array}{lll} \mbox{Ambient Temperature under Bias} & -55^{\circ}\mbox{C to } +125^{\circ}\mbox{C} \\ \mbox{Junction Temperature under Bias} & -55^{\circ}\mbox{C to } +150^{\circ}\mbox{C} \\ \mbox{V}_{\mbox{CC}} \mbox{ Pin Potential to Ground Pin} & -0.5\mbox{V to } +7.0\mbox{V} \\ \end{array}$

Voltage Applied to Output

in HIGH State (with $V_{CC} = 0V$)

 $\begin{array}{ll} \mbox{Standard Output} & -0.5\mbox{V to V}_{\mbox{CC}} \\ \mbox{3-STATE Output} & -0.5\mbox{V to } +5.5\mbox{V} \end{array}$

Current Applied to Output

in LOW State (Max) twice the rated I_{OL} (mA)

Recommended Operating Conditions

Free Air Ambient Temperature 0° C to $+70^{\circ}$ C Supply Voltage +4.5V to +5.5V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation

under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.


DC Electrical Characteristics

Symbol	I Parameter		Min	Тур	Max	Units	v _{cc}	Conditions	
V _{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal	
V _{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal	
V _{CD}	Input Clamp Diode Voltage				-1.2	V	Min	I _{IN} = -18 mA	
V _{OH}	Output HIGH	10% V _{CC}	2.4					$I_{OH} = -3 \text{ mA}$	
	Voltage	10% V _{CC}	2.0			V	Min	$I_{OH} = -15 \text{ mA}$	
		$5\% V_{CC}$	2.7					$I_{OH} = -3 \text{ mA}$	
V _{OL}	Output LOW	10% V _{CC}			0.55	V	Min	I _{OL} = 64 mA	
	Voltage								
I _{IH}	Input HIGH				5.0	μΑ	Max	V _{IN} = 2.7V	
	Current								
I _{BVI}	Input HIGH Current				7.0	μΑ	Max	V _{IN} = 7.0V	
	Breakdown Test								
I _{CEX}	Output HIGH				50	μΑ	Max	V _{OUT} = V _{CC}	
	Leakage Current								
V _{ID}	Input Leakage		4.75			V	0.0	I _{ID} = 1.9 μA	
	Test							All Other Pins Grounded	
I _{OD}	Output Leakage				3.75	μΑ	0.0	V _{IOD} = 150 mV	
	Circuit Current							All Other Pins Grounded	
I _{IL}	Input LOW Current				-1.2	mA	Max	V _{IN} = 0.5V	
Ios	Output Short-Circuit Current		-100		-225	mA	Max	V _{OUT} = 0V	
I _{CCH}	Power Supply Current			3.7	6.0	mA	Max	V _O = HIGH	
I _{CCL}	Power Supply Current			28.0	33.0	mA	Max	$V_O = LOW$	


AC Electrical Characteristics


Symbol	Parameter	$T_A = +25^{\circ}C$ $V_{CC} = +5.0V$ $C_1 = 50 \text{ pF}$			$T_A = 0$ °C to +70°C $C_L = 50 \text{ pF}$		Units
		Min	Typ	Max	Min	Max	
t _{PLH}	Propagation Delay	2.0	3.2	5.5	1.5	6.5	ns
t _{PHL}	A_n , B_n to \overline{O}_n	1.5	2.4	4.5	1.0	5.0	

Physical Dimensions inches (millimeters) unless otherwise noted | 0.335 - 0.344 | (8.509 - 8.738) | (8.509 - 8.738) | (9.791 - 6.198) | (7.791 - 6.198) | (7.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (9.791 - 6.198) | (

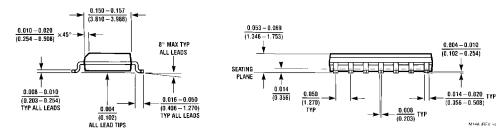

14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow Package Number M14A

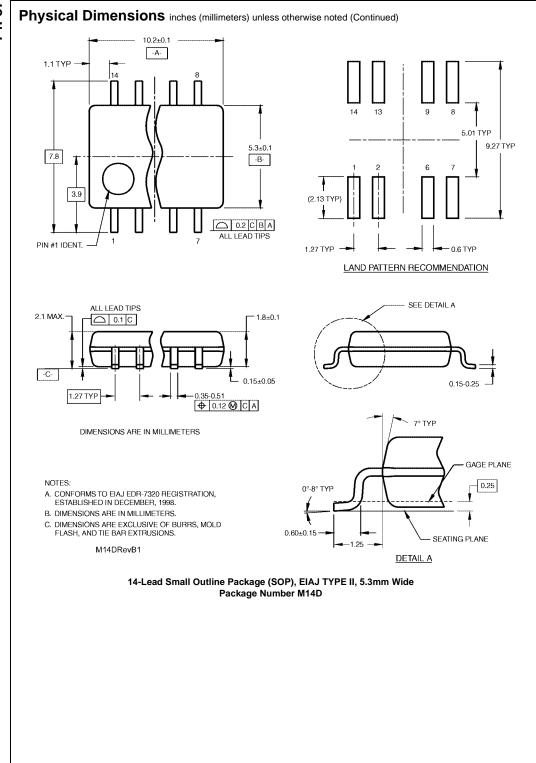

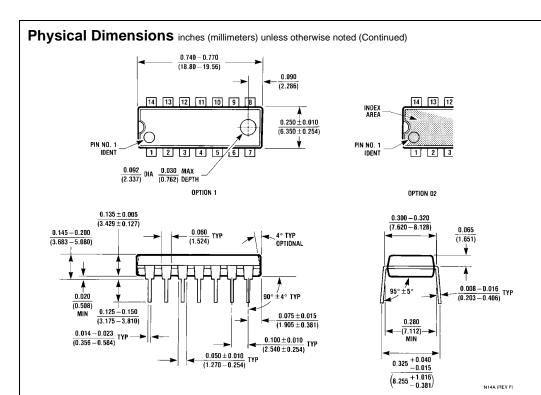

14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide Package Number N14A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com