


TV TUNING.

**FEATURES**

- High Capacitance Ratio :  $C_{2V}/C_{25V}=6.5$ (Typ.)
- Low Series Resistance :  $r_s=0.4\Omega$ (Typ.)
- Excellent C-V Characteristics, and Small Tracking Error.
- Useful for Small Size Tuner.

**MAXIMUM RATING (Ta=25°C)**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	$V_R$	30	V
Peak Reverse Voltage	$V_{RM}$	35 ( $R_L=10k\Omega$ )	V
Junction Temperature	$T_j$	125	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 125	°C

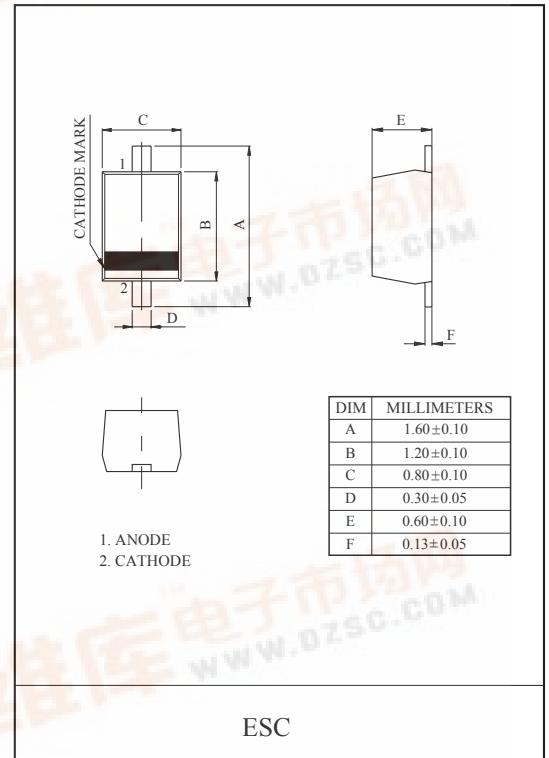

**ELECTRICAL CHARACTERISTICS (Ta=25°C)**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Voltage	$V_R$	$I_R=1\mu A$	30	-	-	V
Reverse Current	$I_R$	$V_R=28V$	-	-	10	nA
Capacitance	$C_{2V}$	$V_R=2V, f=1MHz$	14.16	-	16.25	pF
Capacitance	$C_{25V}$	$V_R=25V, f=1MHz$	2.11	-	2.43	pF
Capacitance Ratio	$C_{2V}/C_{25V}$		5.90	6.50	7.15	-
Series Resistance	$r_s$	$V_R=5V, f=470MHz$	-	0.4	0.55	$\Omega$

Note : Available in matched group for capacitance to 2.5%.

$$\frac{C(\text{Max.})-C(\text{Min.})}{C(\text{Min.})} \leq 0.025$$

( $V_R=2\sim 25V$ )


Marking

Type Name




# KDV214E


$C_V - V_R$

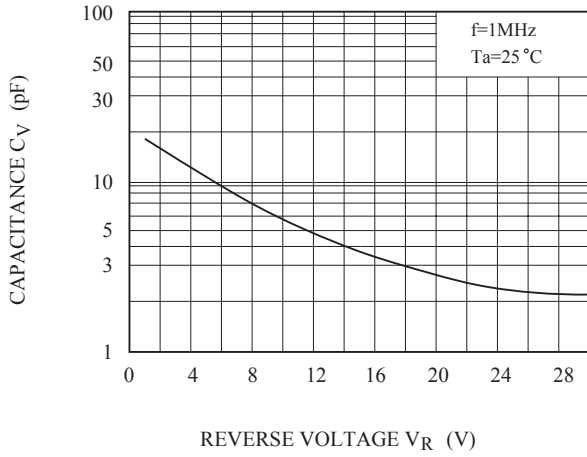


$r_s - V_R$

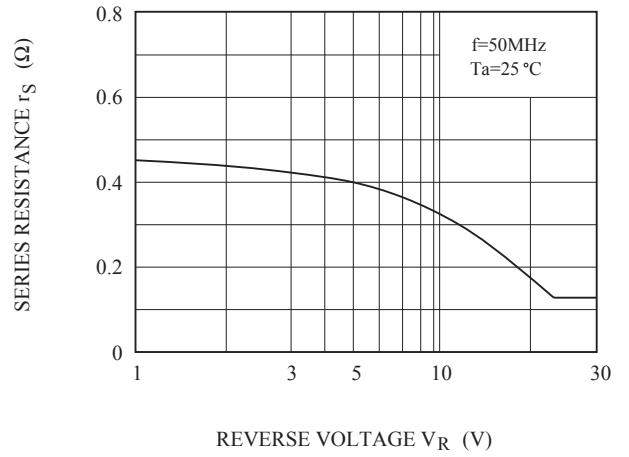

$r_s - f$

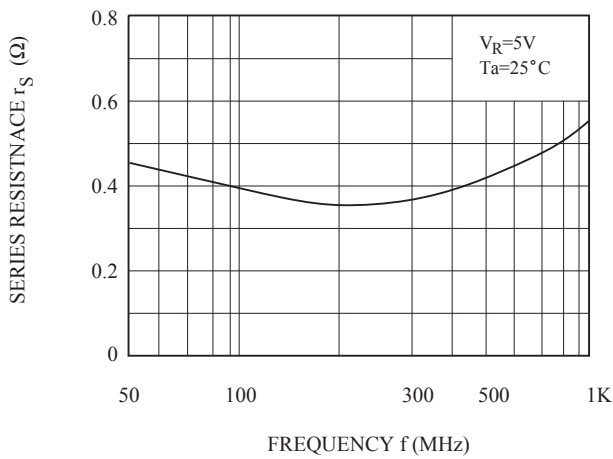

$\delta C - T_a$

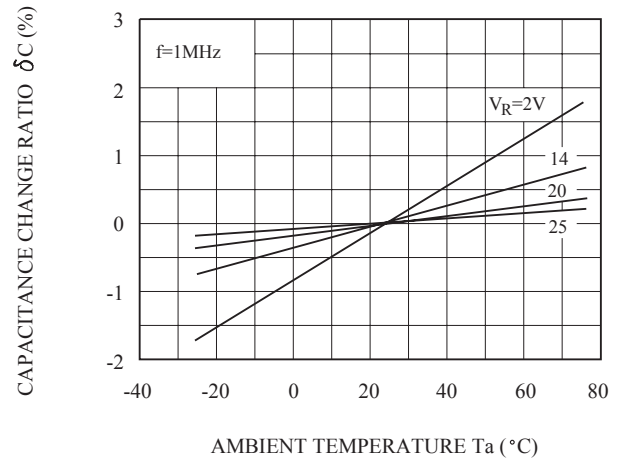

NOTE :  $\delta C = \frac{C(T_a) - C(25)}{C(25)} \times 100$