
Dual Differential PECL to TTL Translator

The MC100ELT23 is a dual differential PECL to TTL translator. Because PECL (Positive ECL) levels are used only +5V and ground are required. The small outline 8-lead SOIC package and the dual gate design of the ELT23 makes it ideal for applications which require the translation of a clock and a data signal. Because the mature MOSAIC 1.5 process is used, low cost can be added to the list of features.

The ELT23 is available in only the ECL 100K standard. Since there are no PECL outputs or an external V_{BB} reference, the ELT23 does not require both ECL standard versions. The PECL inputs are differential; there is no specified difference between the differential input 10H and 100K standards. Therefore, the MC100ELT23 can accept any standard differential PECL input referenced from a V_{CC} of 5.0V.

- 3.5ns Typical Propagation Delay
- Differential PECL Inputs
- Small Outline SOIC Package
- 24mA TTL Outputs
- Flow Through Pinouts

LOGIC DIAGRAM AND PINOUT ASSIGNMENT

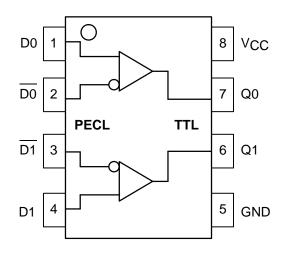



MC100ELT23



7/96

MAXIMUM RATINGS*

| Symbol | Parameter | Value | Unit |
|------------------|---|-------------|------|
| V _{CC} | DC Supply Voltage (Referenced to GND) | 7.0 | V |
| T _A | Operating Temperature Range (In Free-Air) | -40 to 85 | °C |
| T _{STG} | Storage Temperature Range | -55 to +150 | °C |

* Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.

TTL OUTPUT DC CHARACTERISTICS (V_{CC} = 4.75V to 5.25V; T_A = -40°C to 85°C)

| Symbol | Characteristic | Min | Тур | Max | Unit | Condition |
|-----------------|------------------------------|------|-----|-----|------|--------------------------|
| VOH | Output HIGH Voltage | 2.4 | | | V | I _{OH} = -3.0mA |
| V _{OL} | Output LOW Voltage | | | 0.5 | V | I _{OL} = 24mA |
| ІССН | Power Supply Current | | 23 | 33 | mA | |
| ICCL | Power Supply Current | | 26 | 36 | mA | |
| los | Output Short Circuit Current | -150 | | -60 | mA | |

PECL INPUT DC CHARACTERISTICS (V_{CC} = 4.75V to 5.25V; $T_A = -40^{\circ}C$ to 85°C)


| | | _40°C | | 0°C | | 25°C | | | 85°C | | | |
|-----------------|--|----------------|----------------|----------------|----------------|----------------|-----|----------------|----------------|----------------|------|------------------------|
| Symbol | Characteristic | Min | Max | Min | Max | Min | Тур | Max | Min | Max | Unit | Condition |
| Iн | Input HIGH Current | | 150 | | 150 | | | 150 | | 150 | μΑ | |
| ۱ _{IL} | Input LOW Current | 0.5 | | 0.5 | | 0.5 | | | 0.5 | | μA | |
| VCMR | Common Mode Range | 2.2 | Vcc | 2.2 | VCC | 2.2 | | VCC | 2.2 | VCC | V | |
| V _{PP} | Minimum Peak-to-Peak Input 1 | 200 | | 200 | | 200 | | | 200 | | mV | |
| VIH | Input HIGH 10ELT Voltage 100ELT | 3.770 3.835 | 4.110 4.120 | 3.830 3.835 | 4.16 4.12 | 3.870 3.835 | | 4.19 4.12 | 3.930 3.835 | 4.265 4.120 | V | V _{CC} = 5.0V |
| VIL | Input LOW 10ELT Voltage 100ELT | 3.05 3.19 | 3.500 3.525 | 3.05 3.19 | 3.520 3.525 | 3.05 3.19 | | 3.520 3.525 | 3.05 3.19 | 3.550 3.525 | V | V _{CC} = 5.0V |

1. 200mV input guarantees full logic swing at the output.

AC CHARACTERISTICS (V_{CC} = 4.75V to 5.25V; $T_A = -40^{\circ}C$ to $85^{\circ}C$)

| | | -40°C | | 0°C | | 25°C | | | 85°C | | | |
|------------------|--------------------------------|-------|-----|-----|-----|------|-----|-----|------|-----|------|---------------|
| Symbol | Characteristic | Min | Max | Min | Max | Min | Тур | Max | Min | Max | Unit | Condition |
| ^t PLH | Propagation Delay ¹ | 2.0 | 5.5 | 2.0 | 5.5 | 2.0 | | 5.5 | 2.0 | 5.5 | ns | $C_L = 20 pF$ |
| ^t PHL | Propagation Delay ¹ | 2.0 | 5.5 | 2.0 | 5.5 | 2.0 | | 5.5 | 2.0 | 5.5 | ns | $C_L = 20 pF$ |



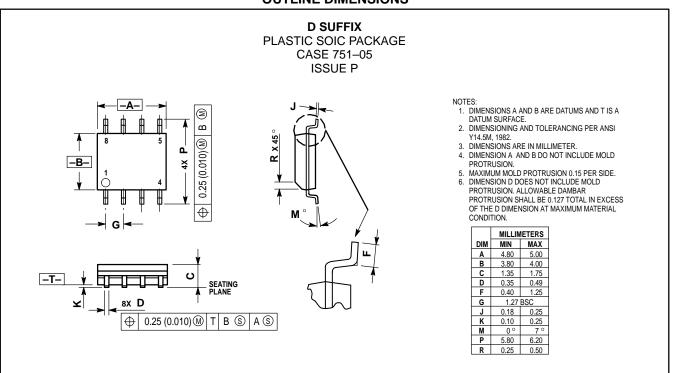

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and **()** are registered trademarks of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

 \Diamond

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298



Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com