## **Power MOSFET** 8 V, ±1.3 A, High Side Load Switch with Level–Shift, P–Channel SC–88

The NTJD1155L integrates a P and N–Channel MOSFET in a single package. This device is particularly suited for portable electronic equipment where low control signals, low battery voltages and high load currents are needed. The P–Channel device is specifically designed as a load switch using ON Semiconductor state–of–the–art trench technology. The N–Channel, with an external resistor (R1), functions as a level–shift to drive the P–Channel. The N–Channel MOSFET has internal ESD protection and can be driven by logic signals as low as 1.5 V. The NTJD1155L operates on supply lines from 1.8 to 8.0 V and can drive loads up to 1.3 A with 8.0 V applied to both  $V_{IN}$  and  $V_{ON/OFF}$ .

#### Features

- Extremely Low R<sub>DS(on)</sub> P-Channel Load Switch MOSFET
- Level Shift MOSFET is ESD Protected
- Low Profile, Small Footprint Package
- V<sub>IN</sub> Range 1.8 to 8.0 V
- ON/OFF Range 1.5 to 8.0 V
- ESD Rating of 3000 V
- Pb-Free Package is Available

#### **MAXIMUM RATINGS** (T<sub>J</sub> = $25^{\circ}$ C unless otherwise noted)

Rating	Symbol	Value	Unit		
Input Voltage (V <sub>DSS</sub> , P-Ch)			V <sub>IN</sub>	8.0	V
ON/OFF Voltage (V <sub>GS</sub> , N-	ON/OFF Voltage (V <sub>GS</sub> , N-Ch)			8.0	V
Continuous Load Current	Steady	$T_A = 25^{\circ}C$	١L	±1.3	А
(Note 1)	State	$T_A = 85^{\circ}C$		±0.9	
Power Dissipation	Steady $T_A = 25^{\circ}C$		PD	0.40	W
(Note 1)	State	$T_A = 85^{\circ}C$		0.20	
Pulsed Load Current	t <sub>p</sub> = 10 μs		I <sub>LM</sub>	±3.9	А
Operating Junction and Storage Temperature			T <sub>J</sub> , T <sub>STG</sub>	–55 to 150	°C
Source Current (Body Diode)			I <sub>S</sub>	-0.4	А
ESD Rating, MIL-STD-883D HBM (100 pF, 1.5 k $\Omega$ )			ESD	3.0	kV
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			ΤL	260	°C

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Junction-to-Ambient - Steady State (Note 1)	$R_{\theta JA}$	320	°C/W
Junction-to-Foot - Steady State (Note 1)	$R_{\theta JF}$	220	

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Surface-mounted on FR4 board using 1 inch sq pad size

(Cu area = 1.127 in sq [1 oz] including traces).





## **ON Semiconductor®**

#### http://onsemi.com


V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> TYP	I <sub>D</sub> MAX
	130 mΩ @ −4.5 V	
8.0 V	170 mΩ @ −2.5 V	±1.3 A
	260 mΩ @ –1.8 V	

#### SIMPLIFIED SCHEMATIC





#### **PIN ASSIGNMENT**




#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NTJD1155LT1	SC-88	3000/Tape & Reel
NTJD1155LT1G	SC-88 (Pb-Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

#### **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = $25^{\circ}$ C unless otherwise noted)


Characteristic	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS		•					
Q2 Drain-to-Source Breakdown Voltage	V <sub>IN</sub>	$V_{GS2}$ = 0 V, $I_{D2}$	= 250 μA	-8.0			V
Forward Leakage Current	I <sub>FL</sub>	V <sub>GS1</sub> = 0 V,	$T_J = 25^{\circ}C$			1.0	μA
		$V_{DS2} = -8.0$ V	T <sub>J</sub> = 125°C			10	
Q1 Gate-to-Source Leakage Current	I <sub>GSS</sub>	V <sub>DS1</sub> = 0 V, V <sub>GS</sub>	<sub>1</sub> = ±8.0 V			±100	nA
Q1 Diode Forward On-Voltage	V <sub>SD</sub>	I <sub>S</sub> = -0.4 A, V <sub>G</sub>	<sub>S1</sub> = 0 V		-0.8	-1.1	V
ON CHARACTERISTICS							
ON/OFF Voltage	V <sub>ON/OFF</sub>			1.5		8.0	V
Q1 Gate Threshold Voltage	V <sub>GS1(th)</sub>	$V_{GS1} = V_{DS1}, I_D = 250 \ \mu A$		0.4		1.0	V
Input Voltage	V <sub>IN</sub>	$V_{GS1} = V_{DS1}, I_D = 250 \ \mu A$		1.8		8.0	V
Q2 Drain-to-Source On Resistance	R <sub>DS(on)</sub>	$V_{ON/OFF} = 1.5 V$ $V_{IN} = 4.5 V$ $I_L = 1.2 A$			130	175	mΩ
			V <sub>IN</sub> = 2.5 V I <sub>L</sub> = 1.0 A		170	220	
			V <sub>IN</sub> = 1.8 V I <sub>L</sub> = 0.7 A		260	320	
Load Current	۱ <sub>L</sub>	$I_L \qquad \begin{array}{c} V_{DROP} \leq 0.2 \text{ V},  V_{IN} = 5.0 \text{ V}, \\ V_{ON/OFF} = 1.5 \text{ V} \end{array}$		1.0			A
		$V_{DROP} \le 0.3 V, V_{ON/OFF} = 1$	/ <sub>IN</sub> = 2.5 V, 1.5 V	1.0			

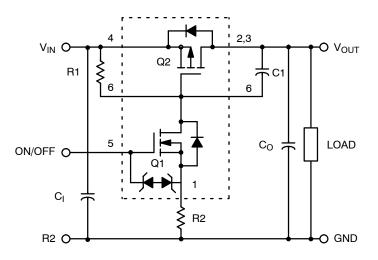




Components	Description Values	
R1	Pullup Resistor	Typical 10 k $\Omega$ to 1.0 M $\Omega^*$
R2	Optional Slew-Rate Control	Typical 0 to 100 kΩ*
C <sub>O</sub> , C <sub>I</sub>	Output Capacitance	Usually < 1.0 $\mu$ F
C1	Optional In-Rush Current Control	Typical ≤ 1000 pF

\*Minimum R1 value should be at least 10 x R2 to ensure Q1 turn-on.

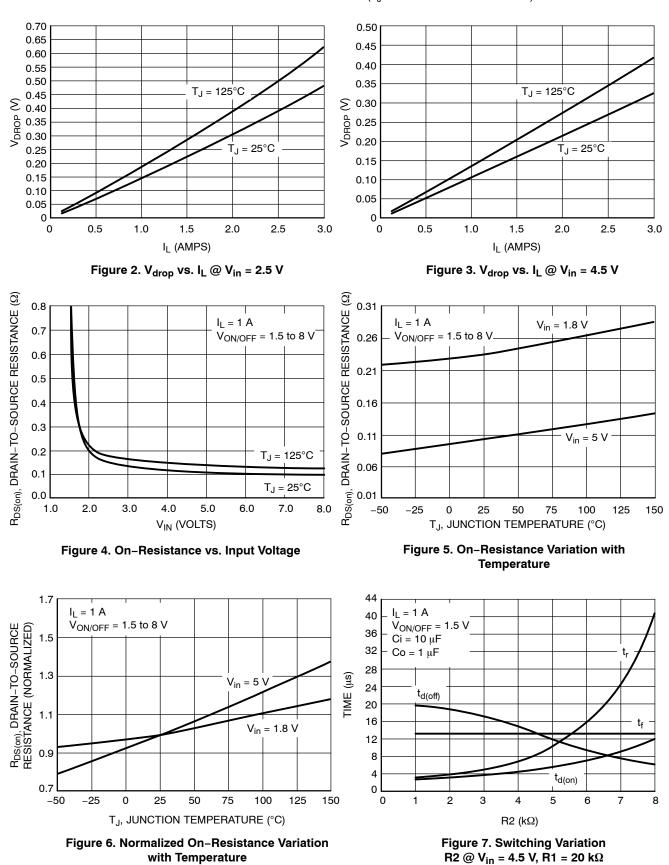

TYPICAL PERFORMANCE CURVES (T<sub>J</sub> = 25°C unless otherwise noted)

with Temperature

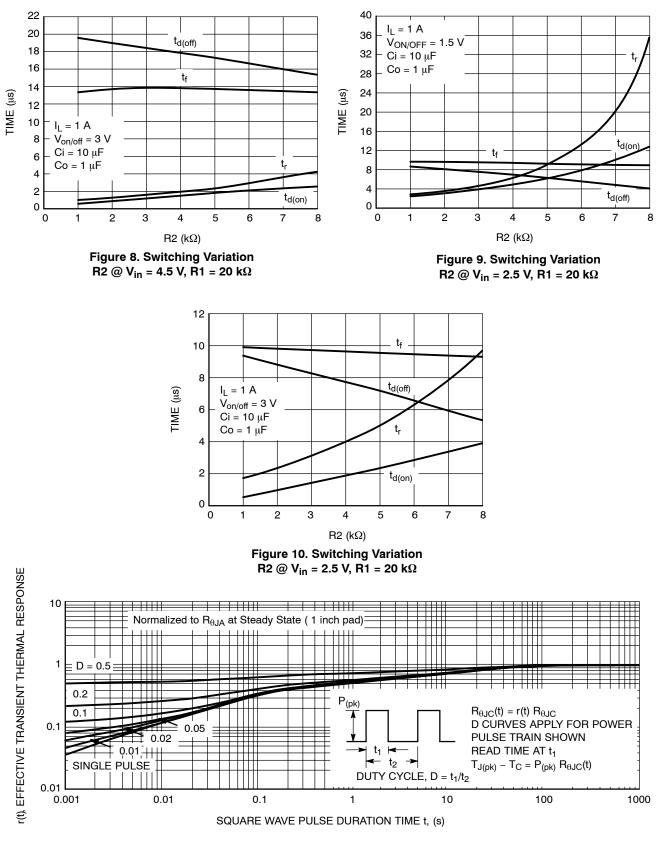



TYPICAL PERFORMANCE CURVES (T<sub>J</sub> = 25°C unless otherwise noted)


Figure 11. FET Thermal Response

#### PACKAGE DIMENSIONS

SC-88 (SOT-363) CASE 419B-02 ISSUE W







NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

2. CONTROLLING DIMENSION: INCH.

3. 419B-01 OBSOLETE, NEW STANDARD 419B-02.

	MILLIMETERS			INCHES			
DIM	MIN	NOM	MAX	MIN	NOM	MAX	
Α	0.80	0.95	1.10	0.031	0.037	0.043	
A1	0.00	0.05	0.10	0.000	0.002	0.004	
A3	0.20 REF			0.008 REF			
b	0.10	0.21	0.30	0.004	0.008	0.012	
С	0.10	0.14	0.25	0.004	0.005	0.010	
D	1.80	2.00	2.20	0.070	0.078	0.086	
E	1.15	1.25	1.35	0.045	0.049	0.053	
е		0.65 BS	65 BSC		.026 BS	С	
L	0.10	0.20	0.30	0.004	0.008	0.012	
HE	2.00	2.10	2.20	0.078	0.082	0.086	

STYLE 30:


PIN 1. SOURCE 1 2. DRAIN 2

3. DRAIN 2

4. SOURCE 2

5. GATE 1 6. DRAIN 1

SOLDERING FOOTPRINT\*



\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and use registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death agosciated with such unintended or unauthorized use persons and segingent or disciple to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 61312, Phoenix, Arizona 85082–1312 USA Phone: 480–829–7710 or 800–344–3860 Toll Free USA/Canada Fax: 480–829–7709 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center 2–9–1 Kamimeguro, Meguro-ku, Tokyo, Japan 153–0051 Phone: 81–3–5773–3850 ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.