


SCLS381L - AUGUST 1997 - REVISED APRIL 2005

- 2-V to 5.5-V V<sub>CC</sub> Operation
- Max t<sub>pd</sub> of 8.5 ns at 5 V
- Typical V<sub>OLP</sub> (Output Ground Bounce)
  <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Typical V<sub>OHV</sub> (Output V<sub>OH</sub> Undershoot)
  >2.3 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Support Mixed-Mode Voltage Operation on All Ports
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)







NC - No internal connection

#### description/ordering information

These dual positive-edge-triggered D-type flip-flops are designed for 2-V to 5.5-V V<sub>CC</sub> operation.

#### ORDERING INFORMATION

TA	PACK	AGE†	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	QFN – RGY	Reel of 1000	SN74LV74ARGYR	LV74A
	0010 B	Tube of 50	SN74LV74AD	11/740
	SOIC - D	Reel of 2500	SN74LV74ADR	LV74A
	SOP - NS	Reel of 2000	SN74LV74ANSR	74LV74A
-40°C to 85°C	SSOP – DB	Reel of 2000	SN74LV74ADBR	LV74A
		Tube of 90	SN74LV74APW	
	TSSOP - PW	Reel of 2000	SN74LV74APWR	LV74A
		Reel of 250	SN74LV74APWT	
	TVSOP - DGV	Reel of 2000	SN74LV74ADGVR	LV74A
	CDIP – J	Tube of 25	SNJ54LV74AJ	SNJ54LV74AJ
-55°C to 125°C	CFP – W	Tube of 150	SNJ54LV74AW	SNJ54LV74AW
	LCCC – FK	Tube of 55	SNJ54LV74AFK	SNJ54LV74AFK

<sup>†</sup>Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SCLS381L - AUGUST 1997 - REVISED APRIL 2005

#### description/ordering information (continued)

A low level at the preset (PRE) or clear (CLR) inputs sets or resets the outputs, regardless of the levels of the other inputs. When PRE and CLR are inactive (high), data at the data (D) inputs meeting the setup-time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a voltage level and is not directly related to the rise time of the clock pulse. Following the hold-time interval, data at the D input can be changed without affecting the levels at the outputs.


These devices are fully specified for partial-power-down applications using  $I_{\text{off}}$ . The  $I_{\text{off}}$  circuitry disables the outputs, preventing damaging current backflow through the devices when they are powered down.

#### **FUNCTION TABLE**

	INP	UTS		OUTI	PUTS
PRE	CLR	CLK	D	Q	Q
L	Н	Х	Χ	Н	L
Н	L	X	Χ	L	Н
L	L	X	Χ	H <sup>†</sup>	H <sup>†</sup>
Н	Н	$\uparrow$	Н	Н	L
Н	Н	$\uparrow$	L	L	Н
Н	Н	L	Χ	Q <sub>0</sub>	$\overline{Q}_0$

<sup>†</sup> This configuration is nonstable; that is, it does not persist when PRE or CLR returns to its inactive (high) level.

#### logic diagram, each flip-flop (positive logic)

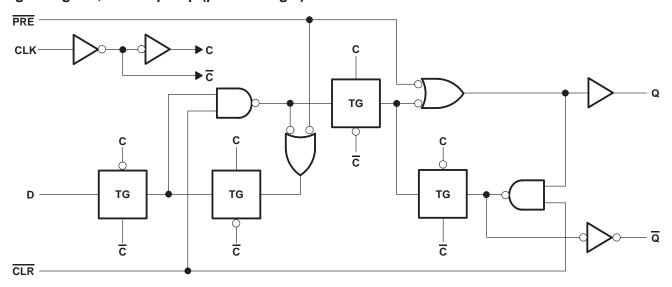

SCLS381L - AUGUST 1997 - REVISED APRIL 2005

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	
Voltage range applied to any output in the high-impedance	
or power-off state, V <sub>O</sub> (see Note 1)	–0.5 V to 7 V
Output voltage range, VO (see Notes 1 and 2)	$\dots$ -0.5 V to V <sub>CC</sub> + 0.5 V
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0)	–20 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0)	
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )	±25 mA
Continuous current through V <sub>CC</sub> or GND	
Package thermal impedance, $\theta_{JA}$ (see Note 3): D package	
(see Note 3): DB package	96°C/W
(see Note 3): DGV package	127°C/W
(see Note 3): NS package	76°C/W
(see Note 3): PW package	113°C/W
(see Note 4): RGY package	
Storage temperature range, T <sub>stq</sub>	

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

- 2. This value is limited to 5.5 V maximum.
- 3. The package thermal impedance is calculated in accordance with JESD 51-7.
- 4. The package thermal impedance is calculated in accordance with JESD 51-5.



SCLS381L - AUGUST 1997 - REVISED APRIL 2005

#### recommended operating conditions (see Note 5)

			SN54	LV74A	SN74I	_V74A	
			MIN	MAX	MIN	MAX	UNIT
Vcc	Supply voltage		2	5.5	2	5.5	V
		V <sub>CC</sub> = 2 V	1.5		1.5		
Maria	I liab lavalianut valtana	V <sub>CC</sub> = 2.3 V to 2.7 V	V <sub>CC</sub> ×0.7		V <sub>CC</sub> × 0.7		V
VIH	High-level input voltage	$V_{CC} = 3 V \text{ to } 3.6 V$	$V_{CC} \times 0.7$		$V_{CC} \times 0.7$		V
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	$V_{CC} \times 0.7$		$V_{CC} \times 0.7$		
		V <sub>CC</sub> = 2 V		0.5		0.5	
Mari	Low lovel input valtage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		$V_{CC} \times 0.3$		$V_{CC} \times 0.3$	V
V <sub>IL</sub>	Low-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V		V <sub>CC</sub> ×0.3		$V_{CC} \times 0.3$	V
		V <sub>CC</sub> = 4.5 V to 5.5 V		V <sub>CC</sub> ×0.3		$V_{CC} \times 0.3$	
٧ı	Input voltage		0	5.5	0	5.5	V
٧o	Output voltage		0	Vcc	0	Vcc	V
		V <sub>CC</sub> = 2 V	3	-50		-50	μΑ
	I like he had a street as mant	V <sub>CC</sub> = 2.3 V to 2.7 V	90	-2		-2	
ЮН	High-level output current	V <sub>CC</sub> = 3 V to 3.6 V	Q	-6		-6	mA
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		-12		-12	
		V <sub>CC</sub> = 2 V		50		50	μΑ
	Lauria al autorit armant	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		2		2	
lOL	Low-level output current	V <sub>CC</sub> = 3 V to 3.6 V		6		6	mA
		V <sub>CC</sub> = 4.5 V to 5.5 V		12		12	
		V <sub>CC</sub> = 2.3 V to 2.7 V		200		200	
Δt/Δν	Input transition rise or fall rate	V <sub>CC</sub> = 3 V to 3.6 V		100		100	ns/V
		V <sub>CC</sub> = 4.5 V to 5.5 V		20		20	
TA	Operating free-air temperature		-55	125	-40	85	°C

NOTE 5: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	TEST SOMBITIONS		SN5	4LV74A		SN7	4LV74A		
PARAMETER	TEST CONDITIONS	VCC	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
	I <sub>OH</sub> = -50 μA	2 V to 5.5 V	V <sub>CC</sub> -0.1			V <sub>CC</sub> -0.1			
.,	$I_{OH} = -2 \text{ mA}$	2.3 V	2			2			V
VOH	I <sub>OH</sub> = -6 mA	3 V	2.48			2.48			V
	I <sub>OH</sub> = -12 mA	4.5 V	3.8	, A	-	3.8			
	I <sub>OL</sub> = 50 μA	2 V to 5.5 V		N.	0.1			0.1	
.,	I <sub>OL</sub> = 2 mA	2.3 V		Q.	0.4			0.4	V
VOL	I <sub>OL</sub> = 6 mA	3 V		5	0.44			0.44	V
	I <sub>OL</sub> = 12 mA	4.5 V	// <sub>G</sub>		0.55			0.55	
lı	V <sub>I</sub> = 5.5 V or GND	0 to 5.5 V	30		±1			±1	μΑ
Icc	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V	Q.		20			20	μΑ
l <sub>off</sub>	$V_I$ or $V_O = 0$ to 5.5 $V$	0			5			5	μΑ
C.	VI – Voc or CND	3.3 V		2			2		n.E
C <sub>i</sub>	$V_I = V_{CC}$ or GND	5 V		2			2		pF



SCLS381L - AUGUST 1997 - REVISED APRIL 2005

### timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 2.5 V $\pm$ 0.2 V (unless otherwise noted) (see Figure 1)

	242445752		$T_A = 2$	25°C	SN54L	V74A	SN74L	.V74A	
	PARAMETER		MIN	MAX	MIN	MAX	MIN	MAX	UNIT
,	Dulan danatan	PRE or CLR low	8		9	~	9		
t <sub>W</sub>	Pulse duration	CLK	8		9	1001	9		ns
,	Catura time a hadana CLIVA	Data	8		9	110	9		
tsu	Setup time before CLK↑	PRE or CLR inactive	7		7		7		ns
th	Hold time, data after CLK↑		0.5		0.5		0.5		ns

### timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

	DADAMETED		$T_A = 2$	25°C	SN54L	.V74A	SN74L	.V74A	
	PARAMETER		MIN	MAX	MIN	MAX	MIN	MAX	UNIT
	Podes doneties	PRE or CLR low	6		7		7		
t <sub>W</sub>	Pulse duration	CLK	6		7	N.C.	7		ns
	Catum times hafare CLVA	Data	6		7	MIL	7		
t <sub>su</sub>	Setup time before CLK↑	PRE or CLR inactive	5		5		5		ns
th	Hold time, data after CLK↑		0.5		0.5		0.5		ns

### timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

	DADAMETED		T <sub>A</sub> = 2	25°C	SN54L	.V74A	SN74L	.V74A	LINUT
	PARAMETER		MIN	MAX	MIN	MAX	MIN	MAX	UNIT
	Dulas duration	PRE or CLR low	5		5	~	5		
t <sub>W</sub>	Pulse duration	CLK	5		5	10,74	5		ns
Ţ.	Catura time a historia CLIVA	Data	5		5	MIL	5		
t <sub>su</sub>	Setup time before CLK↑	PRE or CLR inactive	3		3		3		ns
t <sub>h</sub>	Hold time, data after CLK↑	-	0.5		0.5		0.5		ns

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 2.5 V $\pm$ 0.2 V (unless otherwise noted) (see Figure 1)

DADAMETER	FROM	то	LOAD	T,	<sub>Δ</sub> = 25°C	;	SN54L	V74A	SN74L	.V74A	
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			C <sub>L</sub> = 15 pF	50*	100*		40*	1/5	40		NAL I—
f <sub>max</sub>			C <sub>L</sub> = 50 pF	30	70		25	75,	25		MHz
	PRE or CLR	<u> </u>	0 455		9.8*	14.8*	1*,	17*	1	17	
<sup>t</sup> pd	CLK	Q or Q	C <sub>L</sub> = 15 pF		11.1*	16.4*	15	19*	1	19	ns
4 .	PRE or CLR	Q or Q	C 50 pF		13	17.4	Q <sub>1</sub>	20	1	20	no
<sup>t</sup> pd	CLK	Qorq	$C_L = 50 pF$		14.2	20	2 1	23	1	23	ns

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.



SCLS381L - AUGUST 1997 - REVISED APRIL 2005

## switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

DADAMETED	FROM	то	LOAD	T,	4 = 25°C	;	SN54L	V74A	SN74L	V74A	
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			C <sub>L</sub> = 15 pF	80*	140*		70*	1/5	70		N41.1-
f <sub>max</sub>			C <sub>L</sub> = 50 pF	50	90		45	?E	45		MHz
	PRE or CLR	0 0	0 45 - 5		6.9*	12.3*	1*,	14.5*	1	14.5	
<sup>t</sup> pd	CLK	Q or Q	C <sub>L</sub> = 15 pF		7.9*	11.9*	150	14*	1	14	ns
	PRE or CLR	Q or Q	C: 50 pF		9.2	15.8	01	18	1	18	20
<sup>t</sup> pd	CLK	Q or Q	C <sub>L</sub> = 50 pF		10.2	15.4	2 1	17.5	1	17.5	ns

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

## switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

DADAMETED	FROM	то	LOAD	T,	4 = 25°C	;	SN54L	V74A	SN74L	V74A	
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
,			C <sub>L</sub> = 15 pF	130*	180*		110*	76	110		N 41 1-
f <sub>max</sub>			C <sub>L</sub> = 50 pF	90	140		75	751	75		MHz
	PRE or CLR	<u> </u>	0 45 5		5*	7.7*	1*,	9*	1	9	
<sup>t</sup> pd	CLK	Q or Q	C <sub>L</sub> = 15 pF		5.6*	7.3*	15	8.5*	1	8.5	ns
4 .	PRE or CLR	Q or $\overline{\mathbb{Q}}$	C: 50 pF		6.6	9.7	81	11	1	11	
<sup>t</sup> pd	CLK	QUIQ	C <sub>L</sub> = 50 pF		7.2	9.3	2 1	10.5	1	10.5	ns

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

#### noise characteristics, $V_{CC} = 3.3 \text{ V}$ , $C_L = 50 \text{ pF}$ , $T_A = 25^{\circ}\text{C}$ (see Note 6)

	DADAMETED	SN	74LV74	A	
	PARAMETER	MIN	TYP	MAX	UNIT
V <sub>OL(P)</sub>	Quiet output, maximum dynamic V <sub>OL</sub>		0.1	0.8	V
V <sub>OL(V)</sub>	Quiet output, minimum dynamic V <sub>OL</sub>		0	-0.8	V
VOH(V)	Quiet output, minimum dynamic VOH		3.2		V
VIH(D)	High-level dynamic input voltage	2.31			V
V <sub>IL</sub> (D)	Low-level dynamic input voltage			0.99	V


NOTE 6: Characteristics are for surface-mount packages only.

#### operating characteristics, T<sub>A</sub> = 25°C

PARAMETER			TEST CONDITIONS			UNIT
<u> </u>	Dower discination conscitones	C. F0 pF	f 10 MH-	3.3 V	21	۲
Cpd	Power dissipation capacitance	$C_L = 50 pF$ ,	f = 10 MHz	5 V	23	pF



#### PARAMETER MEASUREMENT INFORMATION

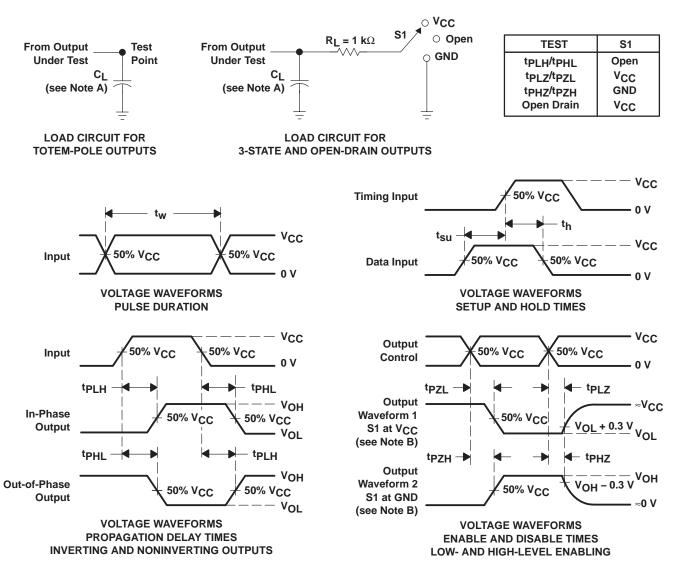

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_Q = 50 \Omega$ ,  $t_f \leq 3$  ns,  $t_f \leq 3$  ns.
- D. The outputs are measured one at a time, with one input transition per measurement.
- E. tpLz and tpHz are the same as tdis.
- F. tpzi and tpzH are the same as ten.
- G. tpHL and tpLH are the same as tpd.
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms





#### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN74LV74AD	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADBLE	OBSOLETE	SSOP	DB	14		TBD	Call TI	Call TI
SN74LV74ADBR	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADBRE4	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADBRG4	ACTIVE	SSOP	DB	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADE4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADG4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADGVR	ACTIVE	TVSOP	DGV	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADGVRE4	ACTIVE	TVSOP	DGV	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADGVRG4	ACTIVE	TVSOP	DGV	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADRE4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ADRG4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ANSR	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74ANSRG4	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APW	ACTIVE	TSSOP	PW	14	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWE4	ACTIVE	TSSOP	PW	14	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWG4	ACTIVE	TSSOP	PW	14	90	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWLE	OBSOLETE	TSSOP	PW	14		TBD	Call TI	Call TI
SN74LV74APWR	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWRE4	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWRG4	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWT	ACTIVE	TSSOP	PW	14	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWTE4	ACTIVE	TSSOP	PW	14	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74APWTG4	ACTIVE	TSSOP	PW	14	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LV74AQDRG4Q1	ACTIVE	SOIC	D	14	2500	Green (RoHS &	CU NIPDAU	Level-1-260C-UNLIM



#### PACKAGE OPTION ADDENDUM

20-Mar-2008

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing		ckage Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
						no Sb/Br)		
SN74LV74ARGYR	ACTIVE	QFN	RGY	14 1	000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
SN74LV74ARGYRG4	ACTIVE	QFN	RGY	14 1	000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.






19-Mar-2008


#### TAPE AND REEL INFORMATION

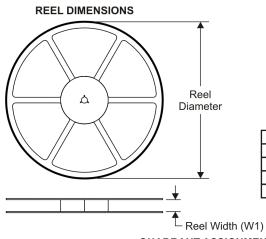



A0	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

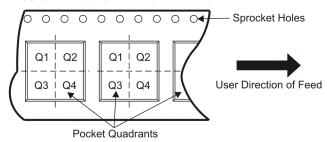

\*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LV74ADBR	SSOP	DB	14	2000	330.0	16.4	8.2	6.6	2.5	12.0	16.0	Q1
SN74LV74ADGVR	TVSOP	DGV	14	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74LV74ADR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LV74ANSR	SO	NS	14	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
SN74LV74APWR	TSSOP	PW	14	2000	330.0	12.4	7.0	5.6	1.6	8.0	12.0	Q1
SN74LV74ARGYR	QFN	RGY	14	1000	180.0	12.4	3.85	3.85	1.35	8.0	12.0	Q1



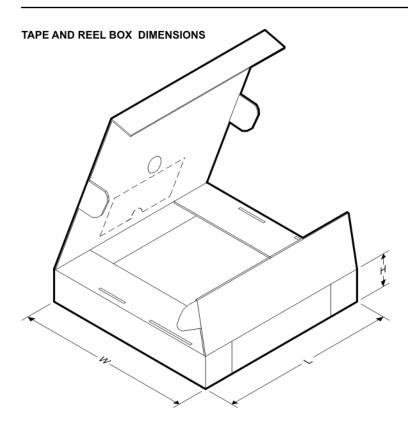

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LV74ADBR	SSOP	DB	14	2000	346.0	346.0	33.0
SN74LV74ADGVR	TVSOP	DGV	14	2000	346.0	346.0	29.0
SN74LV74ADR	SOIC	D	14	2500	346.0	346.0	33.0
SN74LV74ANSR	SO	NS	14	2000	346.0	346.0	33.0
SN74LV74APWR	TSSOP	PW	14	2000	346.0	346.0	29.0
SN74LV74ARGYR	QFN	RGY	14	1000	190.5	212.7	31.8

#### DB (R-PDSO-G\*\*)

#### PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

#### **MECHANICAL DATA**

### NS (R-PDSO-G\*\*)

### 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



#### PW (R-PDSO-G\*\*)

#### 14 PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

#### DGV (R-PDSO-G\*\*)

#### 24 PINS SHOWN

#### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.


B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194

### D (R-PDSO-G14)


### PLASTIC SMALL-OUTLINE PACKAGE

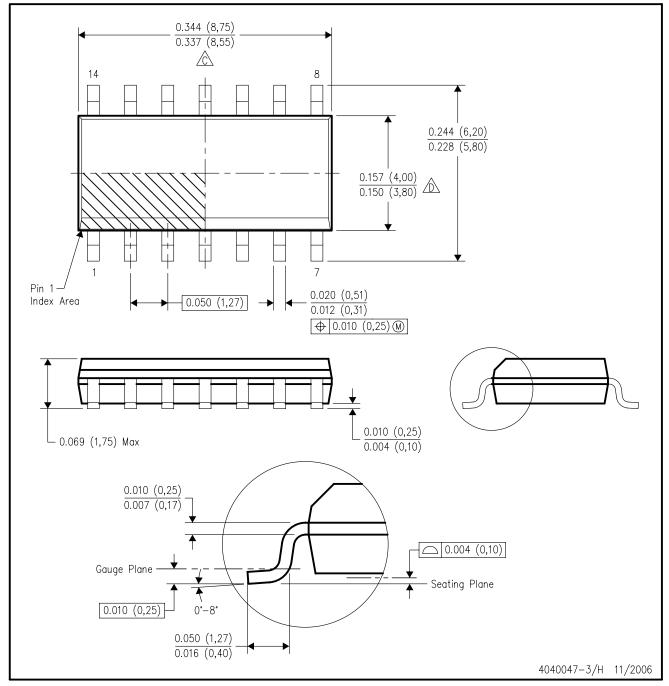

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AB.



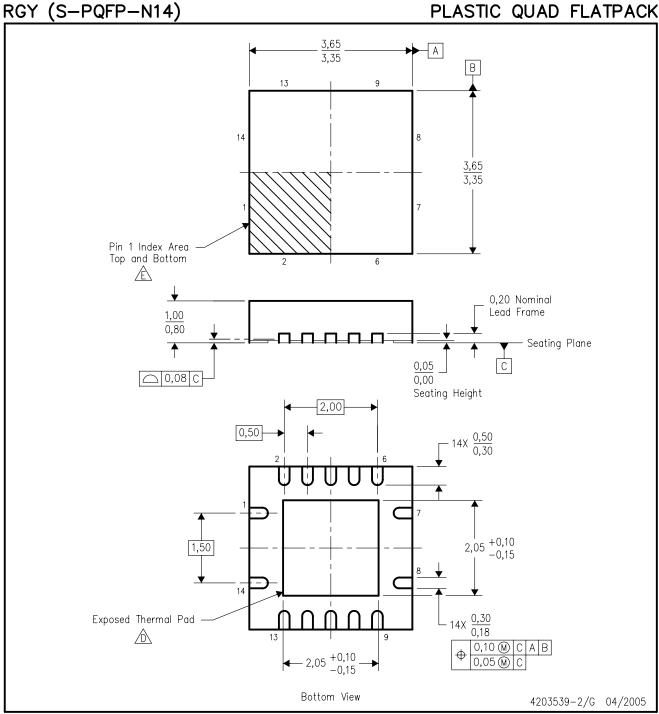

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. QFN (Quad Flatpack No-Lead) package configuration.
- The package thermal pad must be soldered to the board for thermal and mechanical performance.
- Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.
- F. Package complies to JEDEC MO-241 variation BA.






#### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, Quad Flatpack No-Lead Logic Packages, Texas Instruments Literature No. SCBA017. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

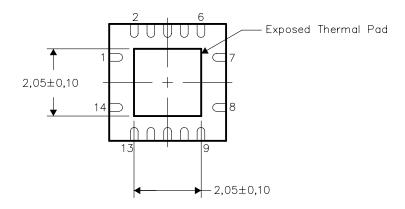


Bottom View

NOTE: All linear dimensions are in millimeters

Exposed Thermal Pad Dimensions

### RGY (R-PQFP-N14)

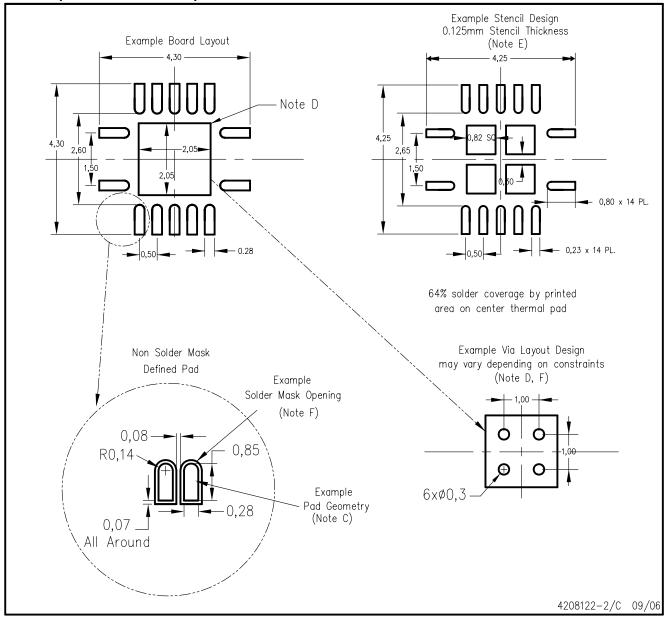

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat—Pack Packages, Texas Instruments Literature No. SCBA017, SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <a href="https://www.ti.com">https://www.ti.com</a>.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

#### **Products Amplifiers** amplifier.ti.com Data Converters dataconverter.ti.com DSP dsp.ti.com Clocks and Timers www.ti.com/clocks Interface interface.ti.com Logic logic.ti.com Power Mgmt power.ti.com Microcontrollers microcontroller.ti.com www.ti-rfid.com RF/IF and ZigBee® Solutions www.ti.com/lprf

Applications	
Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2008, Texas Instruments Incorporated