

# KR Electronics

## General Description


KR 2779 is a 120 MHz bandpass filter. The filter has a 3 dB bandwidth of 20 MHz and is designed for a source and load impedance of 75 Ω. Other passband frequencies are available. Please consult the factory.

## Features


- 120 MHz Center Frequency
- SMA Connectors
- 75 Ω Source and Load

## Typical Performance

### Passband Amplitude & Group Delay (1 dB/div and 10 nsec/div)

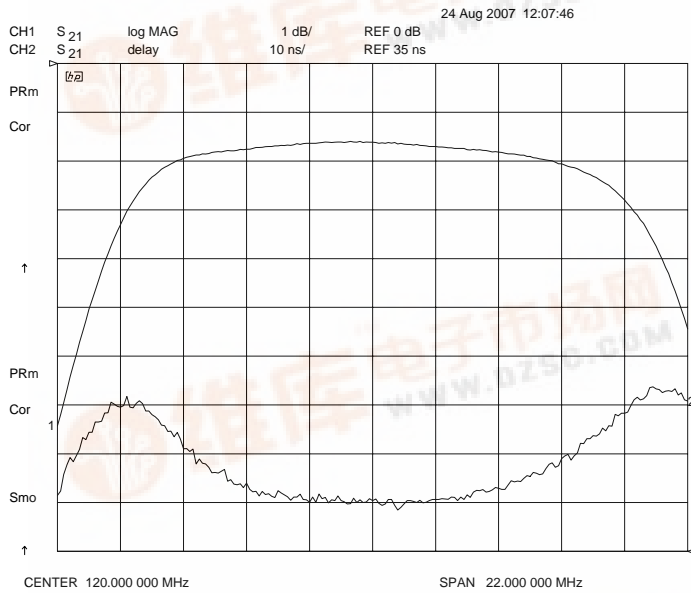

### Overall Response (10 dB/div)

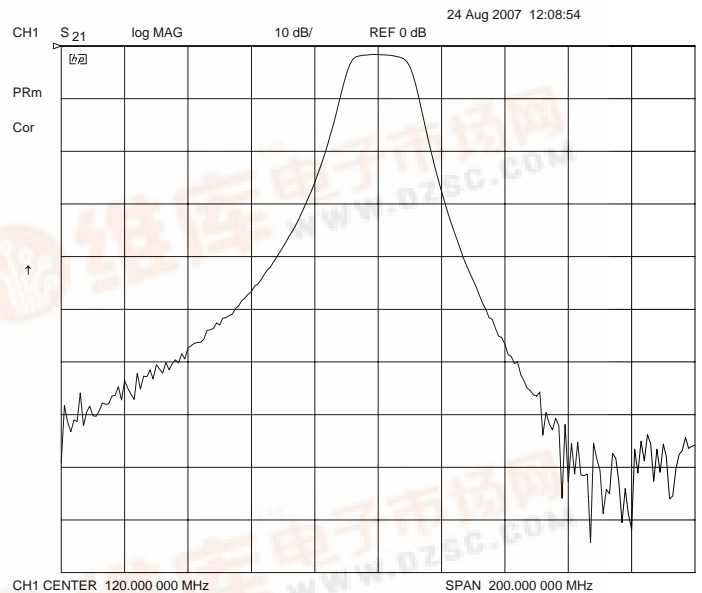

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web www.krfilters.com  
 Email sales@krfilters.com  
 Phone (732) 636-1900  
 Fax (732) 636-1982




# KR Electronics 2779

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	120 MHz
Insertion Loss	< 3 dB (< 2 dB typical)
3 dB Bandwidth	20 MHz $\pm$ 2 MHz
Source and Load	75 $\Omega$

## Physical Dimensions

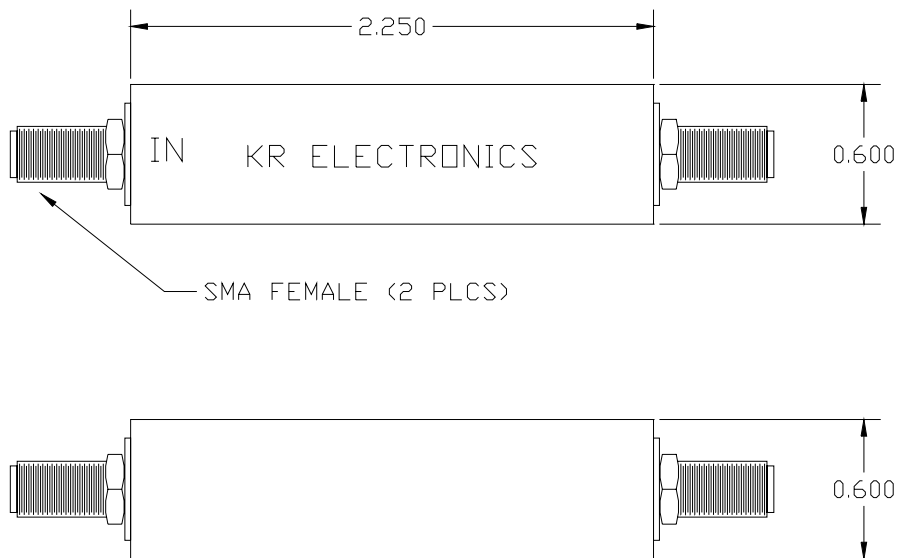

Dimensions in inches  
Metal Case  
Also available in surface mount package