


查询"CTAF03TJ"供应商

CTAF & CTBF Series

From 2.5 nH to 43 nH

ENGINEERING KIT #13

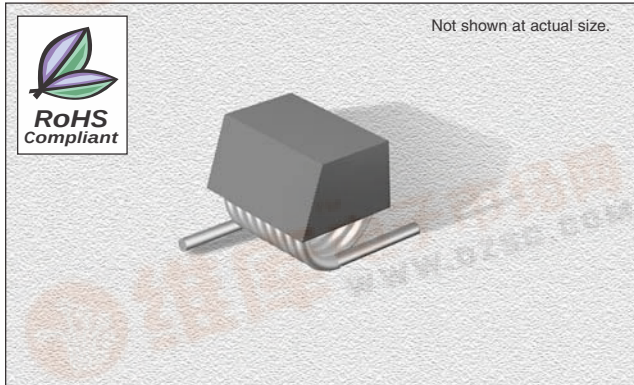

CHARACTERISTICS

Description: SMD air core "spring" inductor**Applications:** Designed to operate a wide frequency range application. Also designed to operate in high Q applications.**Operating Temperature:** -40°C to +85°C**Inductance Tolerance:** $\pm 2\%$, $\pm 5\%$, $\pm 10\%$,**Testing:** Inductance is tested on an HP4286A at 150 MHz**Packaging:** Tape & Reel**Tape Size:** 12 mm wide CTA series, 16 mm wide CTB series**Miscellaneous:** RoHS Compliant.**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

SPECIFICATIONS

Please specify tolerance code when ordering.
 CTAF03T_ ← G = $\pm 2\%$, J = $\pm 5\%$, K = $\pm 10\%$
 * = J or K Tolerance only.

Part Number	Inductance (nH)	# Of Turns	Q Fact. Min.	SRF (GHz)	DCR Max. (mΩ)	IDC Max. (A)
CTAF01TK	2.5	1	145	12.5	1.1	4
CTAF02T_*	5.0	2	140	6.5	1.8	4
CTAF03T_	8.0	3	140	5.0	2.6	4
CTAF04T_	12.5	4	137	3.3	3.4	4
CTAF05T_	18.5	5	132	2.5	3.9	4
CTBF06T_	17.5	6	100	2.2	4.5	4
CTBF07T_	22.0	7	102	2.1	5.2	4
CTBF08T_	28.0	8	105	1.8	6.0	4
CTBF09T_	35.5	9	112	1.5	6.8	4
CTBF10T_	43.0	10	106	1.2	7.9	4


PHYSICAL DIMENSIONS

CTA SERIES

Size	A	B	C	D	E
mm	3.05	3.18	0.58 $\pm$ 0.38	3.68	2.92 $\pm$ 0.25
inches	0.12	0.125	0.023 $\pm$ 0.015	0.145	0.115 $\pm$ 0.01

CTB SERIES

Size	A	B	C	D	E
mm	3.05	3.18	0.58 $\pm$ 0.38	6.86	5.84 $\pm$ 0.25
inches	0.12	0.125	0.023 $\pm$ 0.015	0.270	0.230 $\pm$ 0.01

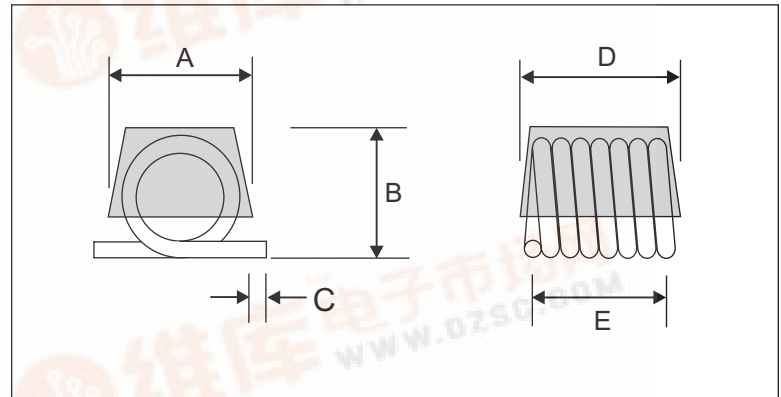


PAD LAYOUT

CTA SERIES

Size	A	B	C	D	E
mm	3.3	2.79	4.19	1.65	1.27
inches	0.13	0.11	0.165	0.065	0.05

CTB SERIES

Size	A	B	C	D	E
mm	3.3	2.79	7.24	4.7	1.27
inches	0.13	0.11	0.285	0.185	0.05

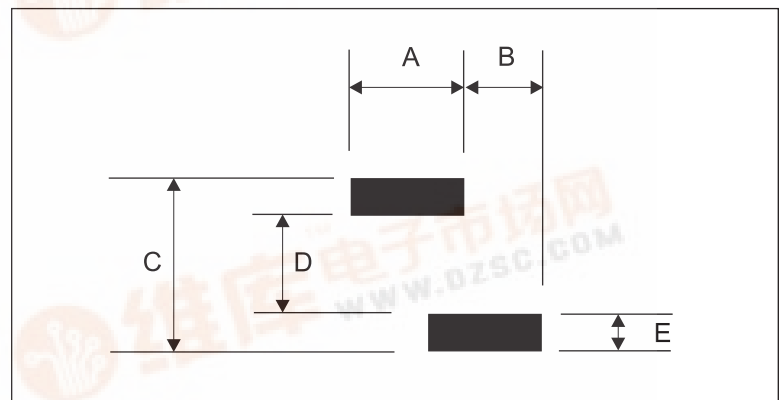

10.11.06

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2006 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

