

[查询"FAR-F6KA-1G8800-L4AF"供应商](#)

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	PCS-Tx	DATE	Jun 28, 2005
FMD Part Number	FAR-F6KA-1G8800-L4AF	Version1.0a	

**Table 1. Electrical specifications**


Passband:1850.6 ~ 1909.4 MHz						
Item	Condition	Specification			Unit	Remarks
		Min.	Typ.	Max.		
Insertion Loss	1850.6~1909.4 MHz	-	2.4	3.8	dB	
Ripple	1850.6~1909.4 MHz	-	1.3	2.7	dB	
Absolute attenuation	DC~1570 MHz	20	25	-	dB	
	1570~1580 MHz	24	30	-	dB	
	1580~1770 MHz	24	30	-	dB	
	1770~1829.4 MHz	10	23	-	dB	
	1930.6~1989.4 MHz	27	35	-	dB	
	1989.4~3000 MHz	23	32	-	dB	
	3000~4000 MHz	14	21	-	dB	
	4000~6000 MHz	4	9	-	dB	
VSWR(Input)	1850.6~1909.4 MHz	-	2.0	2.5	-	
VSWR(Output)	1850.6~1909.4 MHz	-	2.0	2.5	-	
Input Impedance	Unbalanced	50			Ohm	
Output Impedance	Unbalanced	50			Ohm	
Operating Temperature		-30 ~ +85			°C	
Device size		1.4typ.x1.0typ.x0.5max.			mm	

[查询"FAR-F6KA-1G8800-L4AF"供应商](#)

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	PCS-Tx	DATE	Jun 28, 2005
FMD Part Number	FAR-F6KA-1G8800-L4AF	Version1.0a	

**Dimensions**


Device size: 1.4typ. x 1.0typ. x 0.5max.

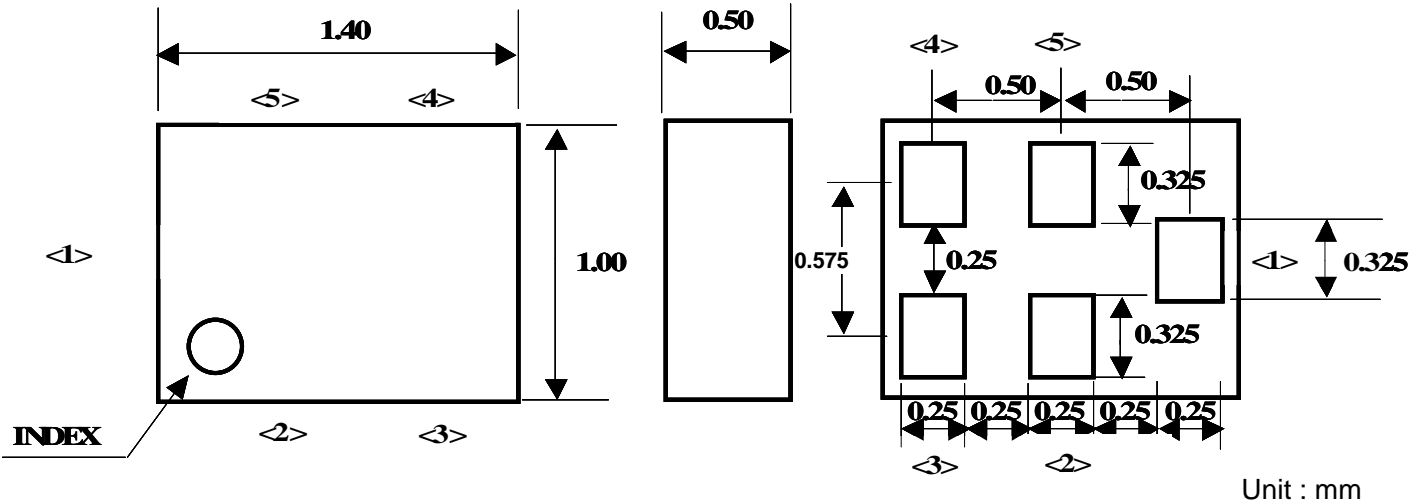

**Pin Configuration**

Pin No.	Pin name	Description
1	IN	Unbalanced pin
2	GND	Ground
3	GND	Ground
4	OUT	Unbalanced pin
5	GND	Ground

**Evaluation Circuit**

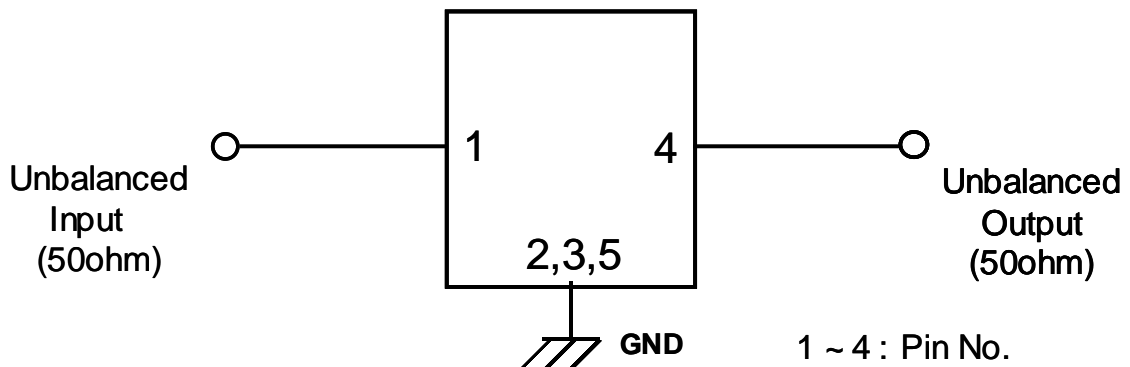

[查询"FAR-F6KA-1G8800-L4AF"供应商](#)

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	PCS-Tx	DATE	Jun 28, 2005
FMD Part Number	FAR-F6KA-1G8800-L4AF	Version1.0a	

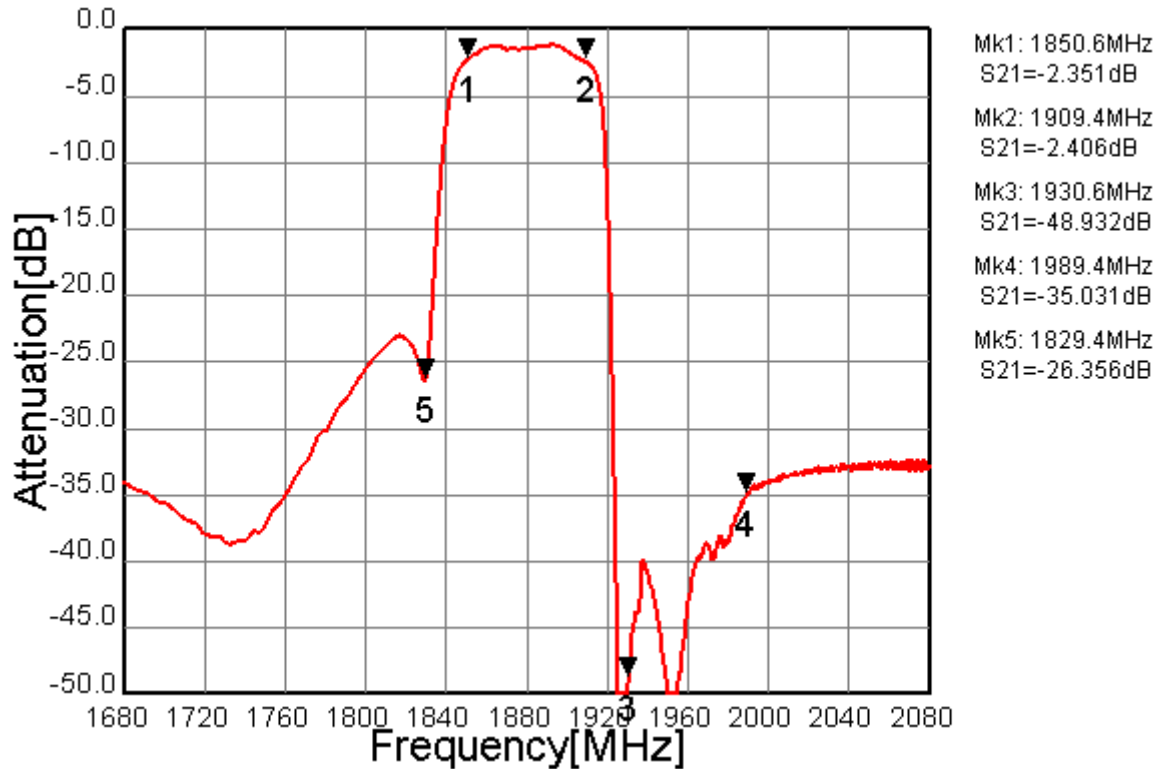


Fig.1 Pass-band Characteristics


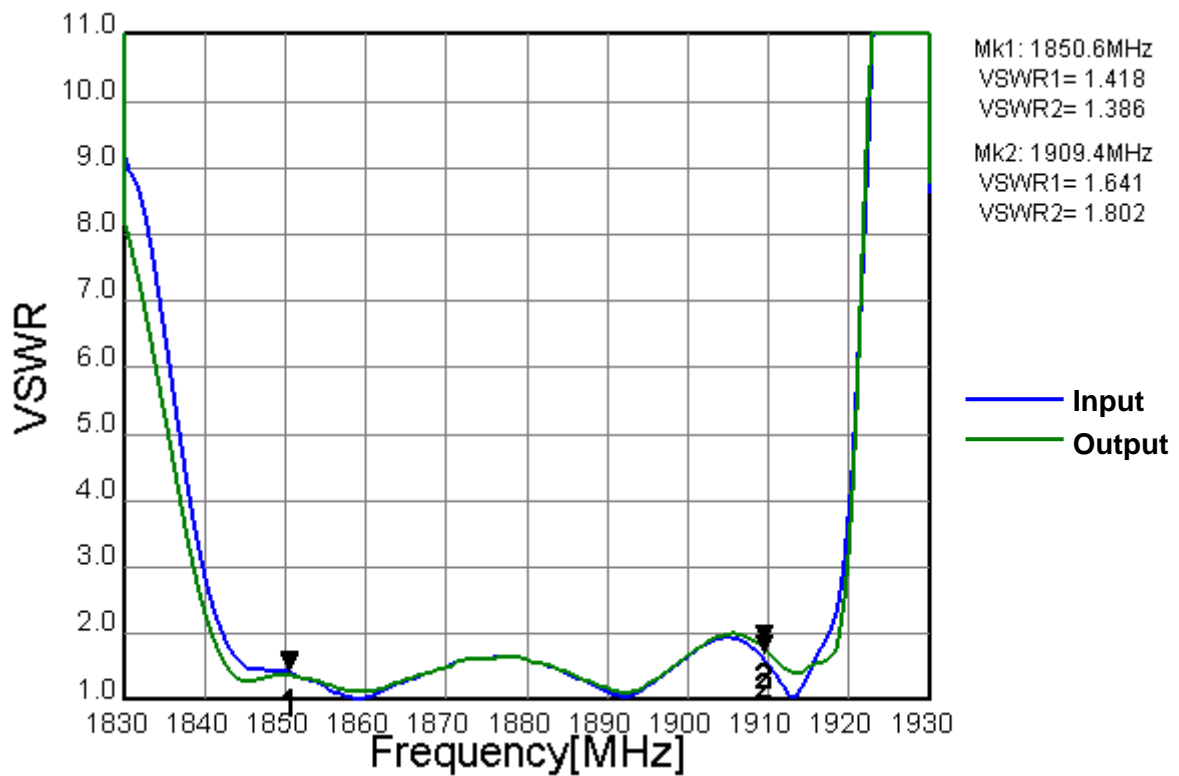



Fig.2 VSWR

[查询"FAR-F6KA-1G8800-L4AF"供应商](#)

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	PCS-Tx	DATE	Jun 28, 2005
FMD Part Number	FAR-F6KA-1G8800-L4AF	Version1.0a	

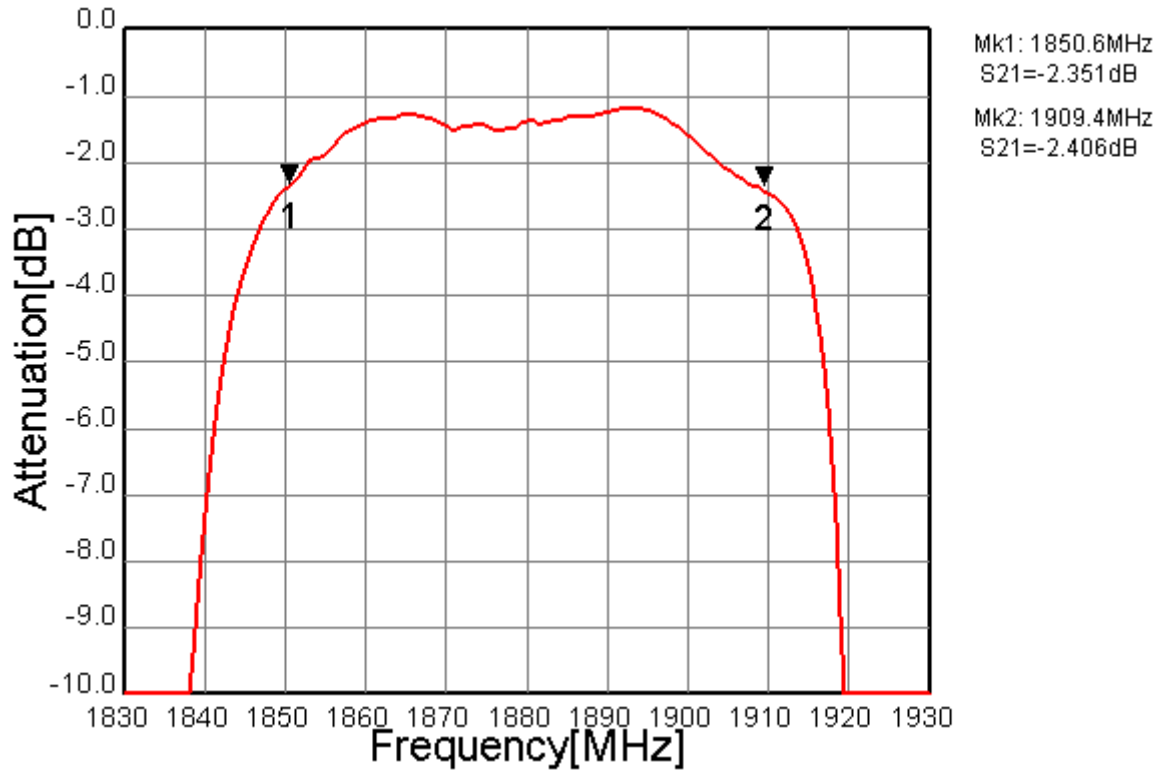


**Fig.3 In-band Characteristics**

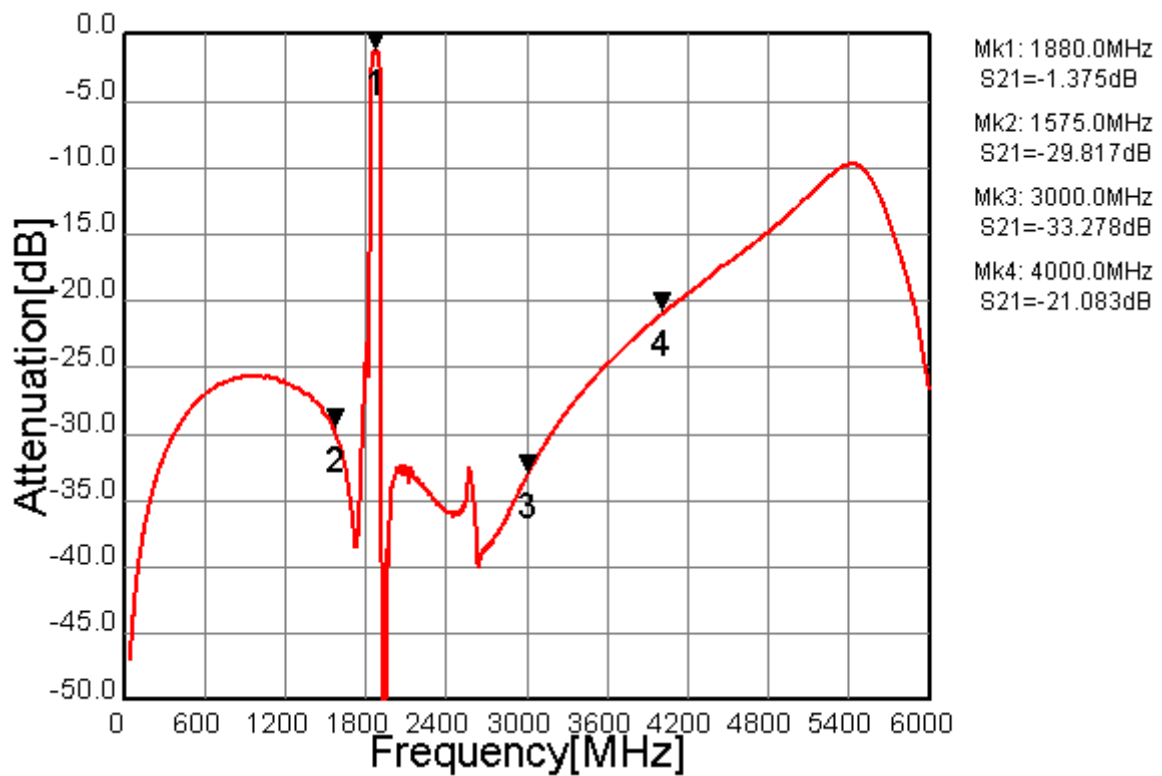


**Fig.4 Wide-band Characteristics**

[查询"FAR-F6KA-1G8800-L4AF"供应商](#)

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	PCS-Tx	DATE	Jun 28, 2005
FMD Part Number	FAR-F6KA-1G8800-L4AF	Version1.0a	

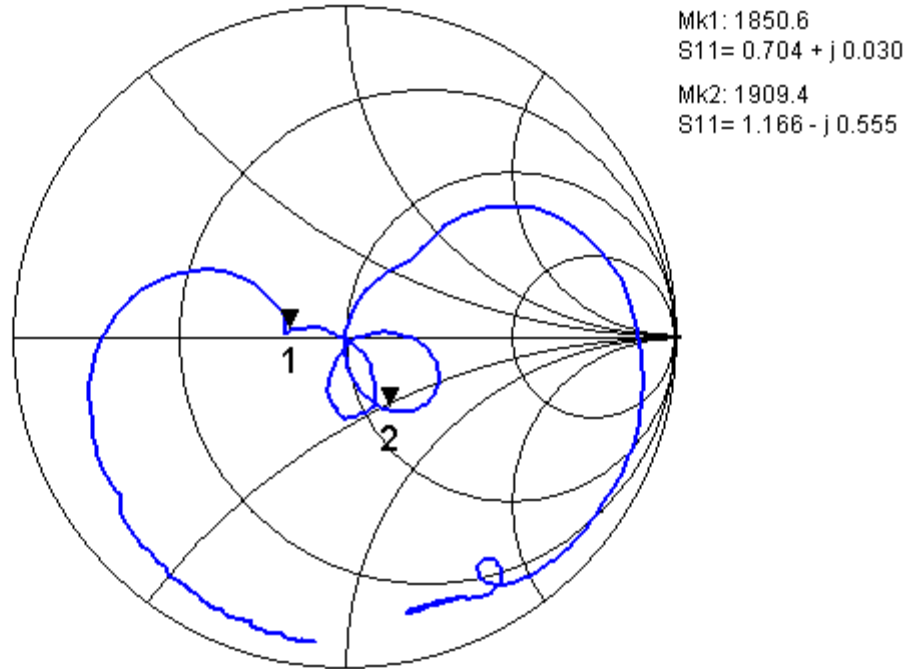

**Fig.5 Input Impedance**

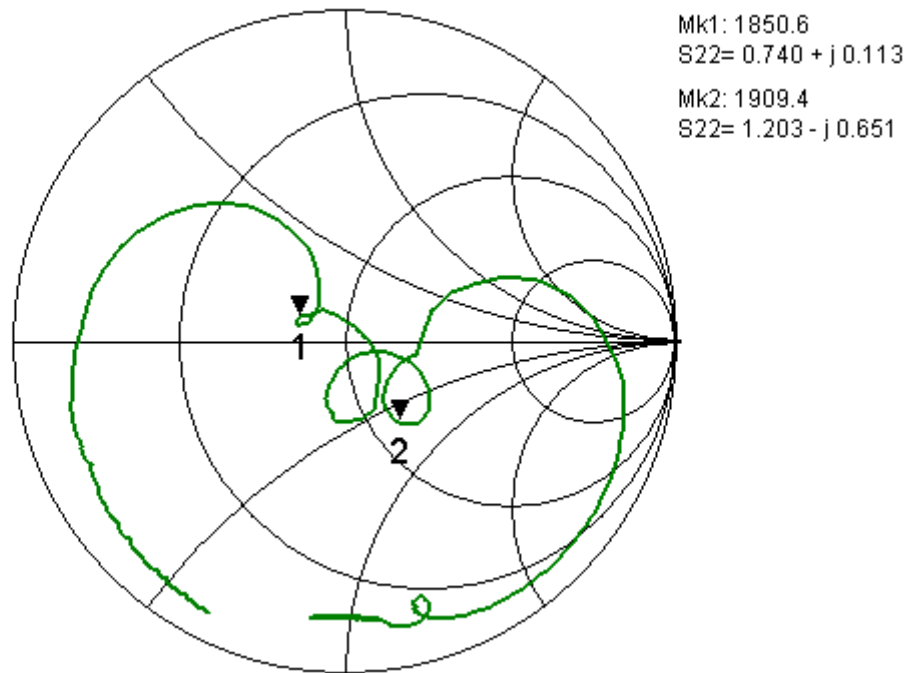

**Fig.6 Output Impedance**

**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**