


1

2

3

4

5

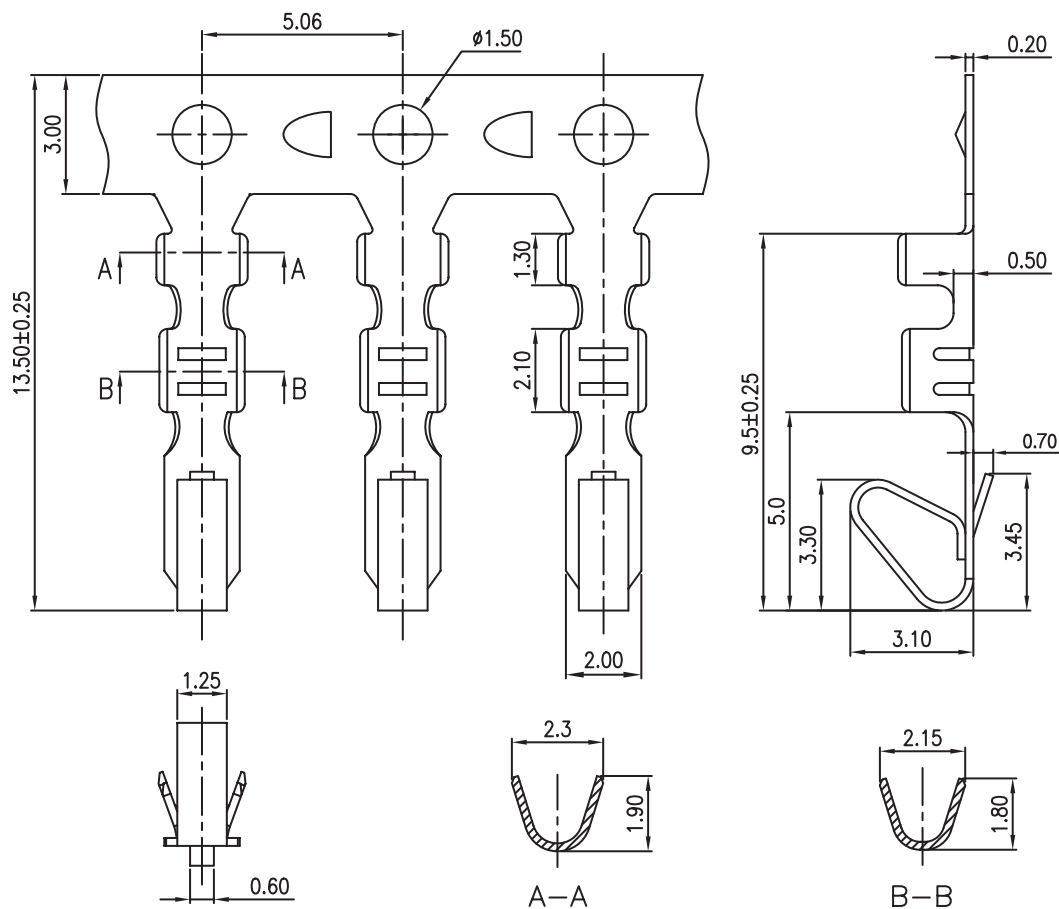

TECHNICAL CHARACTERISTICS

MATERIAL
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: TIN
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 2.54MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 125°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 3A
 WORKING VOLTAGE: 250V AC
 CONTACT RESISTANCE: 20 mOHM MAX

WIRE DIMENSION
 AWG: AWG 22 - 28

PACKAGING
 10KPCS REEL

RoHS Compliant

G				PROJECTION:
F	06-AUG-13	DESCRIPTION	QL	
E	06-AUG-10	DIMENSION	GG	
D	09-AUG-08	T&R DESCRIPTION	RB	
C	30-JAN-07	DRAW	EC	APPROVAL: RJ
B	01-APR-04	LEAD FREE	JP	
A	01-JUL-99	PDF	JP	
REV	DATE	FILE	BY	

GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



UNIT: MM

SCALE:

SHEET: 1/1

DRAW: PEARL

DESCRIPTION: 2.54 MM FEMALE CRIMP TERMINAL

WERI PART NO: 61900113722

SIZE

A4



1

2

3

4

5

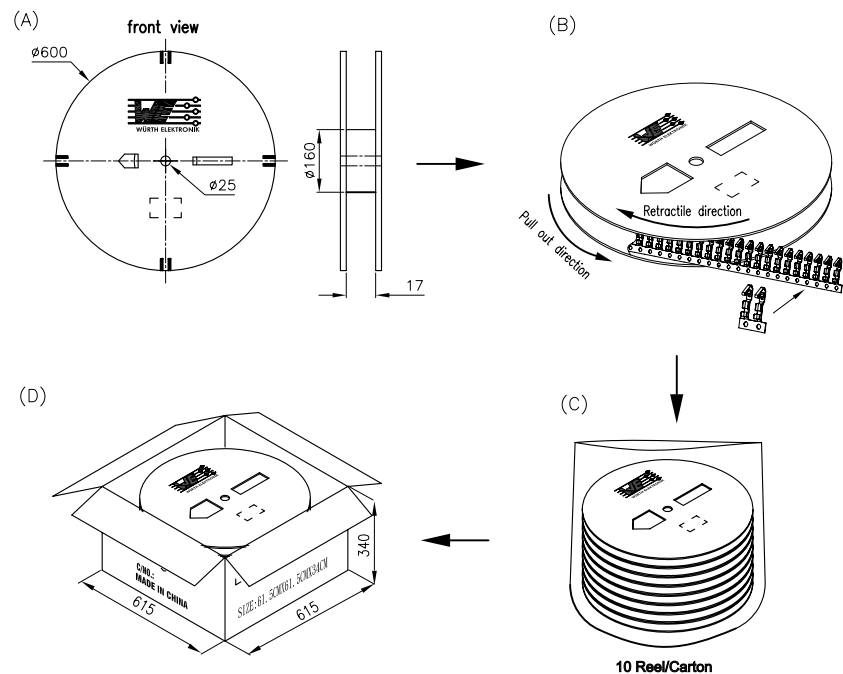


Note :

1. All dimensions meet EIA-481-3 requirements.
2. Material : WH Conductive polystyrene Alloy.
3. Thickness : 0.50 ± 0.05 mm.
4. Component load per reel : 10000 pcs.
5. Reel size : diameters 160*25, T=17.
6. Reel chipboard size : diameters 600*25, T=7.
7. Bag size : 900*900*0.06.
8. Carton size : 615*615*340.

Q'tY/Reel	Reel/Carton	Q'tY/Carton
10Kpcs	10	100Kpcs

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15



APPROVAL:

UNIT: MM

SCALE:

SHEET: 2/2

DRAW: PEARL

DESCRIPTION: 2.54MM FEMALE CRIMP CONTACT

WERI PART NO: 6190 01 13722

SIZE

A4

A

B

C

D