


SAW Bandpass Filter 202546B

1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

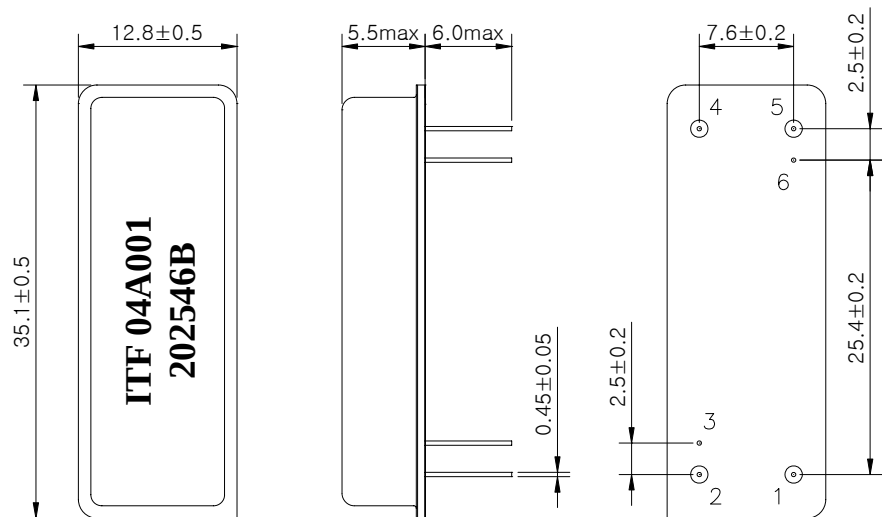

Package : D3512

Dimensions shown are nominal in millimeters
Base : Fe(SPCC), Au plating over Ni plated
Cap : Cu & Cr Alloy, Ni Plated
Termination : Kovar, Au Plated

Pin Configuration	
1	Input
4	Output
2, 5	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	202546B	
		Rev. Date	2004-10-19	
		Rev.	NI2026-CS04	1/5

SAW Bandpass Filter 202546B

3. Specifications

Fo = 160.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	159.92	160	160.08
Insertion Loss	dB	-	23.0	25.5
1dB Bandwidth	MHz	-	2.45	-
3dB Bandwidth	MHz	2.45	2.57	-
40dB Bandwidth	MHz	-	3.08	3.1
Amplitude Ripple (Fo +/- 1.15 MHz)	dB	-	0.8	1.0
Group Delay Variation (Fo +/- 1.15 MHz)	nsec	-	200	300
Absolute Delay	usec	-	4.72	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	202546B	
		Rev. Date	2004-10-19	
		Rev.	NI2026-CS04	2/5

SAW Bandpass Filter 202546B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

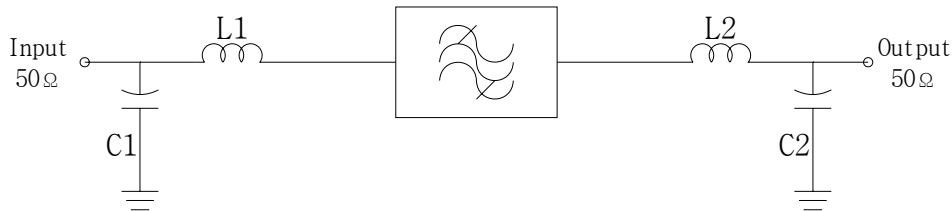

$L1 = L2 = 39\text{ nH}$

$C1 = C2 = 39\text{ pF}$

5. Marking Configuration

ITF¹⁾ 04A001²⁾
202546B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	202546B	
		Rev. Date	2004-10-19	
		Rev.	NI2026-CS04	3/5

SAW Bandpass Filter 202546B







6. Typical Performance (at +25℃)

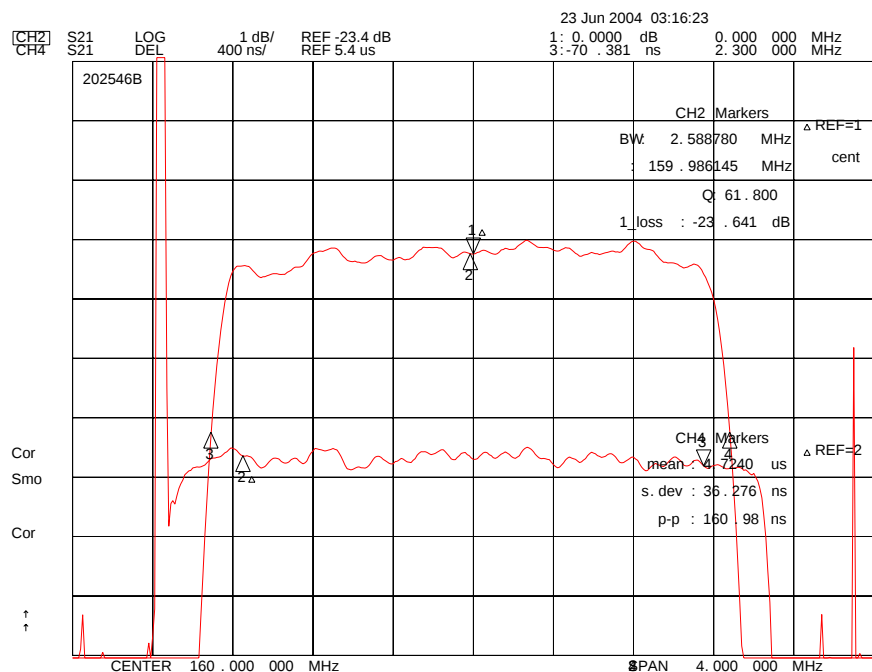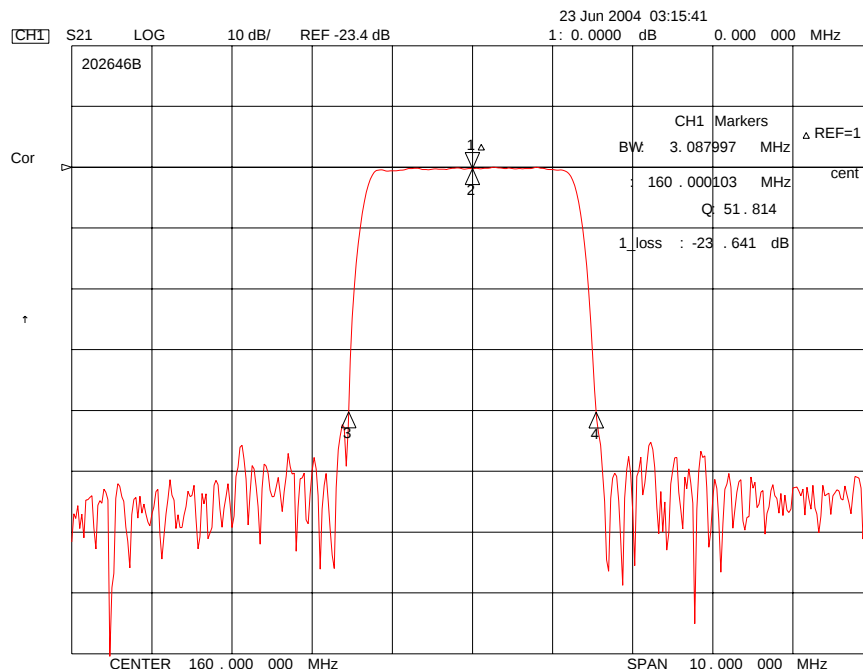

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 202546B	
			Rev. Date 2004-10-19	
			Rev. NI2026-CS04	4/5

SAW Bandpass Filter 202546B

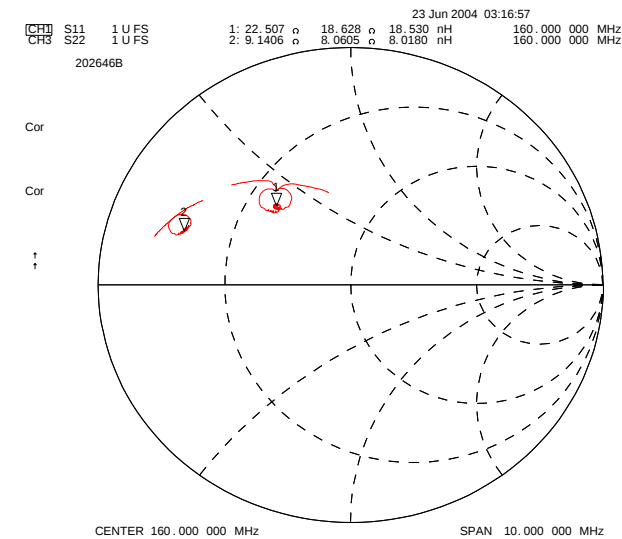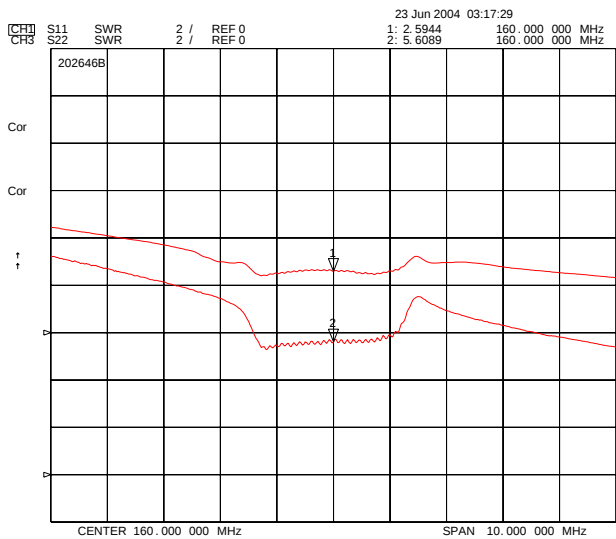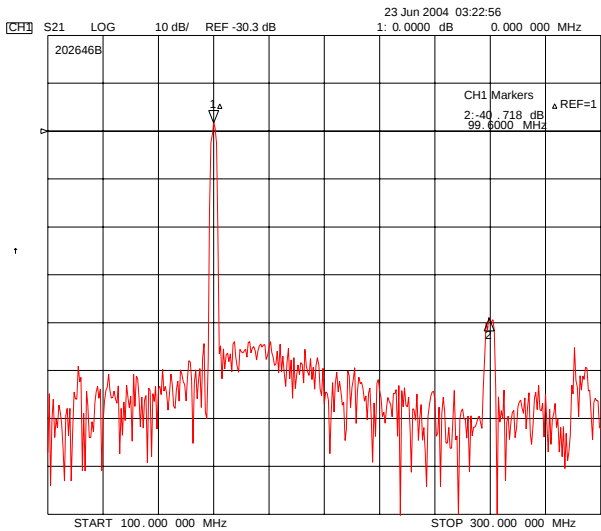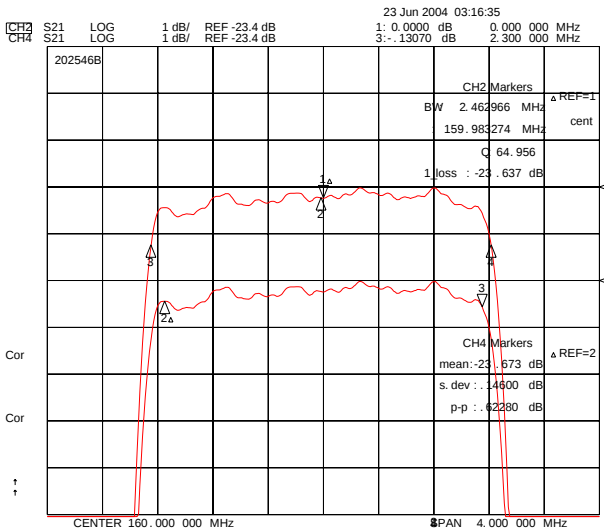

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.	202546B	
Rev. Date	2004-10-19	
Rev.	NI2026-CS04	5/5