




# PRODUCT SPECIFICATION

**CATALOG NUMBER:** See table below  
**CUSTOMER:** Stock  
**DESCRIPTION:** Outdoor use extension cord incorporating type SJTW cable  
**APPROVALS:** UL Listed and CSA Certified Outdoor Use Cord Set

**CONSTRUCTION PARAMETERS:**

Conductor: See table below  
 Jacket material: PVC  
 Overall cable O.D. (nom): See table below  
 Cord rating: Hard Usage per the National Electrical Code  
 Cable legend: Indent print  
 Attachment plug configuration: NEMA 5-15P  
 Cord connector configuration: NEMA 5-15R  
 Plug and connector material: PVC

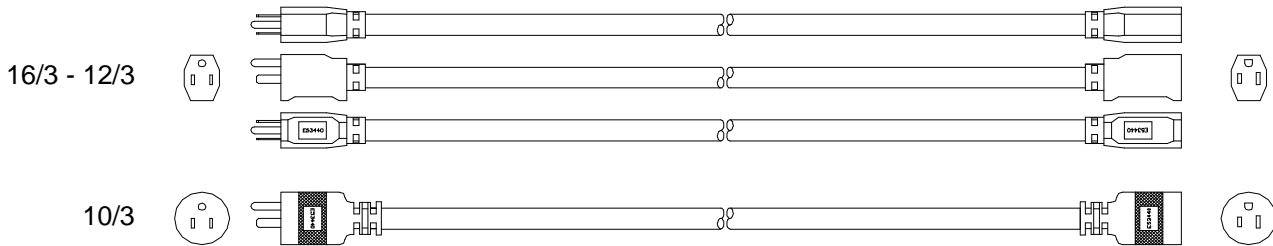

**ELECTRICAL PROPERTIES:**

Cable temperature rating: -20 to +60 °C  
 Nominal operating voltage: 125 VAC  
 Maximum operating current: See table below

Catalog number	Length	Conductor	Cable O.D. (nom)	Current rating
02304	10 ft	16/3 26/30 BC	0.315 in	13A
02305	15 ft			
02306	15 ft			
02307	25 ft			
02308	50 ft			
02309	100 ft	14/3 41/30 BC	0.352 in	10 A
02407	25 ft			
02408	50 ft			
02409	100 ft	12/3 65/30 BC	0.420 in	15A
02507	25 ft			
02508	50 ft			
02509	100 ft			
02607	25 ft	10/3 104/30 BC	0.567 in	15A
02608	50 ft			
02609	100 ft			

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Systems. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Systems.

**CUSTOMER APPROVAL:** \_\_\_\_\_ Date: \_\_\_\_\_  
 Title: \_\_\_\_\_