




BY296G THRU BY299G

FAST RECOVERY GLASS PASSIVATED RECTIFIERS

Reverse Voltage - 100 to 800 Volts Forward Current -2.0 Amperes

DO-15

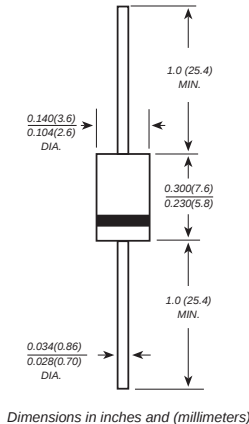

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-15 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.014 ounce, 0.40 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	BY296G	BY297G	BY298G	BY299G	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	100	200	400	800	VOLTS
Maximum RMS voltage	V_{RMS}	70	140	280	560	VOLTS
Maximum DC blocking voltage	V_{DC}	100	200	400	800	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	I_{AV}	2.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	70.0				Amps
Maximum instantaneous forward voltage at 2.0A	V_F	1.3				Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	5.0 100.0				μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	500				ns
Typical junction capacitance (NOTE 2)	C_J	40.0				pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	40.0				$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150				$^\circ\text{C}$

Note: 1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

MDD ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES BY296G THRU BY299G

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

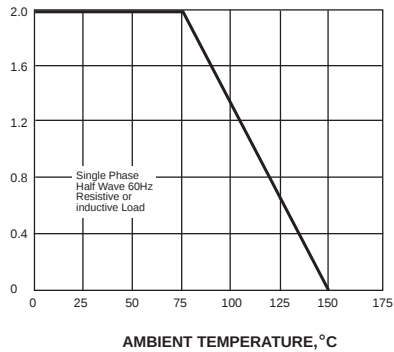

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD
SURGE CURRENT


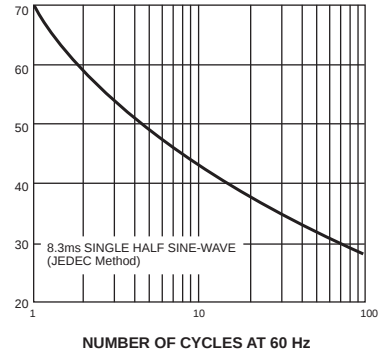


FIG. 3-TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTICS

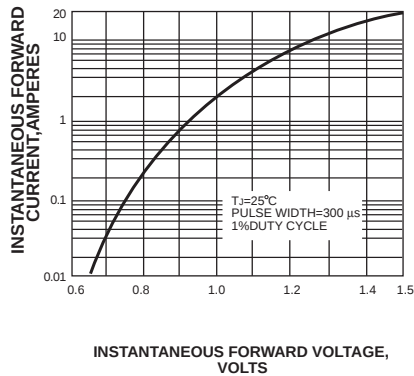

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS



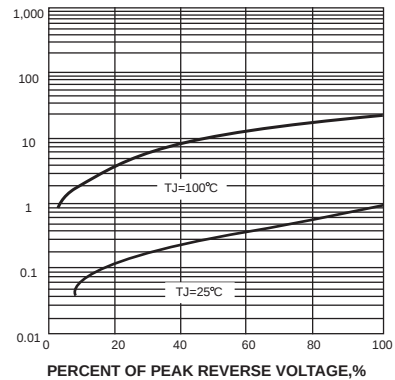


FIG. 5-TYPICAL JUNCTION CAPACITANCE

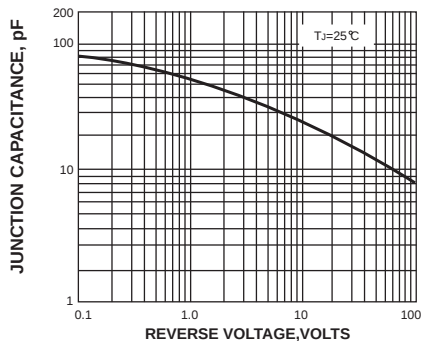

TRANSIENT THERMAL IMPEDANCE,
 $^\circ\text{C/W}$

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

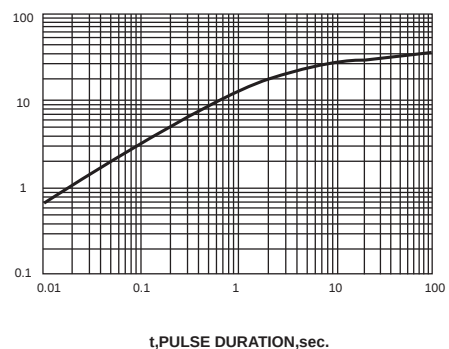

MDD ELECTRONIC