




SR820CT THRU SR8A0CT

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current -8.0 Amperes

TO-220AB

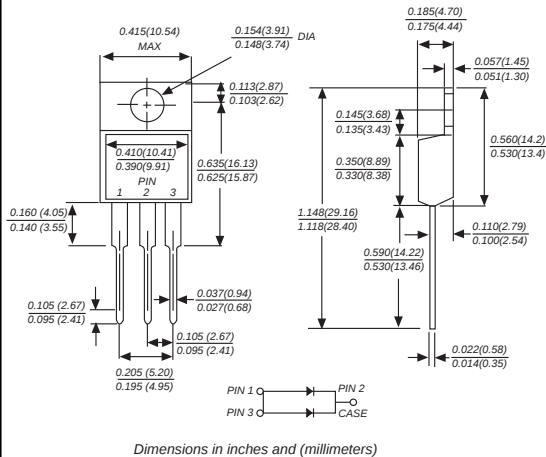

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds

MECHANICAL DATA

Case: TO-220AB molded plastic body
Terminals: Leads solderable per MIL-STD-750, Method 2026
Polarity: As marked
Mounting Position: Any
Weight: 0.080 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	SR 820CT	SR 830CT	SR 840CT	SR 845CT	SR 850CT	SR 860CT	SR 870CT	SR 880CT	SR 890CT	SR 8A0CT	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	32	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current (see fig.1)	I _(AV)	8.0										Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0										Amps
Maximum instantaneous forward voltage at 8.0A	V _F	0.65				0.75		0.85				Volts
Maximum DC reverse current T _A =25°C	I _R	1.0										mA
at rated DC blocking voltage T _A =100°C		15.0				50.0						
Typical junction capacitance (NOTE 1)	C _J	300				250				pF		
Typical thermal resistance (NOTE 2)	R _{θJC}	3.0										°C/W
Operating junction temperature range	T _J	-65 to +125				-65 to +150				°C		
Storage temperature range	T _{STG}	-65 to +150										°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2. Thermal resistance from junction to case

MDD ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES SR820CT THRU SR8A0CT

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

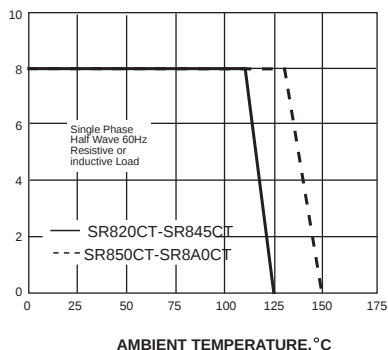

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


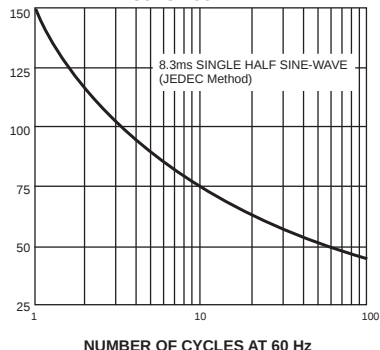


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

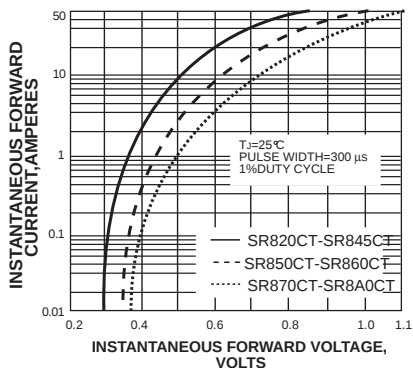

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS


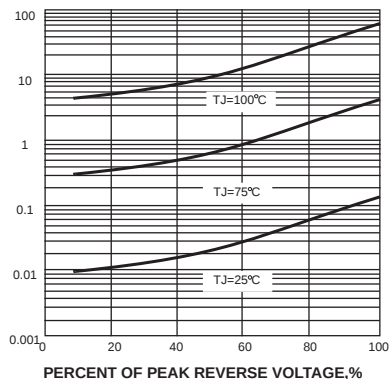


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE,
 $^{\circ}\text{C/W}$

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

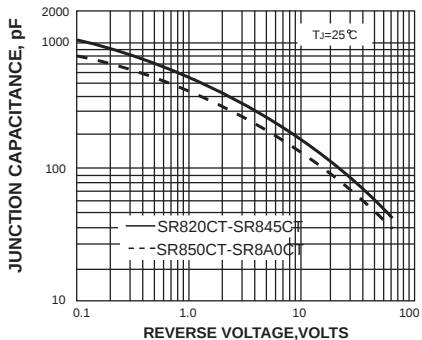